

A P P E N D I X E

NOISE BACKGROUND,  
MONITORING DATA, AND  
CALCULATIONS





# Noise Background and Modeling Data

## NOISE BACKGROUND

### *Terminology and Noise Descriptors*

The following are brief definitions of noise terminology:

- **Sound.** A vibratory disturbance that, when transmitted by pressure waves through a medium such as air, is capable of being detected by a receiving mechanism, such as the human ear or a microphone.
- **Noise.** Sound that is loud, unpleasant, unexpected, or otherwise undesirable.
- **Decibel (dB).** A unitless measure of sound on a logarithmic scale, which indicates the squared ratio of sound pressure amplitude to a reference sound pressure amplitude. The reference pressure is 20 micropascals.
- **A-Weighted Decibel (dBA).** An overall frequency-weighted sound level in decibels which approximates the frequency response of the human ear.
- **Equivalent Continuous Noise Level (Leq).** The mean of the noise level averaged over the measurement period, regarded as an average level.
- **Day-Night Level (Ldn).** The energy average of the A-weighted sound levels occurring during a 24-hour period, with 10 dB added to the A-weighted sound levels occurring during the period from 10 PM to 7 AM. The  $L_{dn}$  and the CNEL are similar noise descriptors and rarely differ by more than 1 dBA.
- **Community Noise Equivalent Level (CNEL).** The energy average of the A-weighted sound levels occurring during a 24-hour period, with 5 dB added to the A-weighted sound levels occurring during the period from 7 to 10 PM and 10 dB added to the A-weighted sound levels occurring during the period from 10 PM to 7 AM.
- **Sensitive Receptor.** Noise- and vibration-sensitive receptors include land uses where quiet environments are necessary for enjoyment and public health and safety. Residences, schools, motels and hotels, libraries, religious institutions, hospitals, and nursing homes are examples.

$L_{dn}$  and CNEL values rarely differ by more than 1 dB. As a matter of practice,  $L_{dn}$  and CNEL values are considered to be equivalent and are treated as such in this assessment.

### *Characteristics of Sound*

Sound is a pressure wave transmitted through the air. When an object vibrates, it radiates part of its energy as acoustical pressure in the form of a sound wave. Sound can be described in terms of amplitude (loudness), frequency (pitch), or duration (time). The standard unit of measurement of the loudness of sound is the decibel (dB). The human hearing system is not equally sensitive to sound at all frequencies. Sound waves below 16 Hz are not heard at all and are "felt" more as a vibration. Similarly, while people with extremely sensitive hearing can hear sounds as high as 20,000 Hz, most people cannot hear above 15,000 Hz. In all cases, hearing acuity falls off rapidly above about 10,000 Hz and

below about 200 Hz. Since the human ear is not equally sensitive to sound at all frequencies, a special frequency-dependent rating scale is usually used to relate noise to human sensitivity. The A-weighted decibel scale (dBA) performs this compensation by discriminating against frequencies in a manner approximating the sensitivity of the human ear.

Because of the physical characteristics of noise transmission and noise perception, the relative loudness of sound does not closely match the actual amounts of sound energy. Table 1, Change in Sound Pressure Level, dB, presents the subjective effect of changes in sound pressure levels. Typical human hearing can detect changes of approximately 3 dBA or greater under normal conditions. Changes of 1 to 3 dBA are detectable under quiet, controlled conditions and changes of less than 1 dBA are usually indiscernible. A change of 5 dBA or greater is typically noticeable to most people in an exterior environment and a change of 10 dBA is perceived as a doubling (or halving) of the noise.

<i>Table 1</i>	
<i>Change in Sound Pressure Level, dB</i>	
<b><i>Change in Apparent Loudness</i></b>	
± 3 dB	Threshold of human perceptibility
± 5 dB	Clearly noticeable change in noise level
± 10 dB	Half or twice as loud
± 20 dB	Much quieter or louder

Source: Bies and Hansen 2003.

#### *Point and Line Sources*

Noise may be generated from a point source, such as a piece of construction equipment, or from a line source, such as a road containing moving vehicles. Because noise spreads in an ever-widening pattern, the given amount of noise striking an object, such as an eardrum, is reduced with distance from the source. This is known as "spreading loss." The typical spreading loss for point source noise is 6 dBA per doubling of the distance from the noise source.

A line source of noise, such as vehicles proceeding down a roadway, would also be reduced with distance, but the rate of reduction is affected by of both distance and the type of terrain over which the noise passes. Hard sites, such as developed areas with paving, reduce noise at a rate of 3 dBA per doubling of the distance while soft sites, such as undeveloped areas, open space and vegetated areas reduce noise at a rate of 4.5 dBA per doubling of the distance. These represent the extremes and most areas would actually contain a combination of hard and soft elements with the noise reduction placed somewhere in between these two factors. Unfortunately, the only way to actually determine the absolute amount of attenuation that an area provides is through field measurement under operating conditions with subsequent noise level measurements conducted at varying distances from a constant noise source.

Objects that block the line of sight attenuate the noise source if the receptor is located within the "shadow" of the blockage (such as behind a sound wall). If a receptor is located behind the wall, but has a view of the source, the wall would do little to reduce the noise. Additionally, a receptor located on the same side of the wall as the noise source may experience an increase in the perceived noise level, as the wall would reflect noise back to the receptor compounding the noise.



### *Noise Metrics*

Several rating scales (or noise "metrics") exist to analyze adverse effects of noise, including traffic-generated noise, on a community. These scales include the equivalent noise level ( $L_{eq}$ ), the community noise equivalent level (CNEL) and the day/night noise level ( $L_{dn}$ ).  $L_{eq}$  is a measurement of the sound energy level averaged over a specified time period.

The CNEL noise metric is based on 24 hours of measurement. CNEL differs from  $L_{eq}$  in that it applies a time-weighted factor designed to emphasize noise events that occur during the evening and nighttime hours (when quiet time and sleep disturbance is of particular concern). Noise occurring during the daytime period (7:00 AM to 7:00 PM) receives no penalty. Noise produced during the evening time period (7:00 to 10:00 PM) is penalized by 5 dB, while nighttime (10:00 PM to 7:00 AM) noise is penalized by 10 dB. The  $L_{dn}$  noise metric is similar to the CNEL metric except that the period from 7:00 to 10:00 PM receives no penalty. Both the CNEL and  $L_{dn}$  metrics yield approximately the same 24-hour value (within 1 dB) with the CNEL being the more restrictive (i.e., higher) of the two.

### *Psychological and Physiological Effects of Noise*

Physical damage to human hearing begins at prolonged exposure to noise levels higher than 85 dBA. Exposure to high noise levels affects the entire system, with prolonged noise exposure in excess of 75 dBA increasing body tensions, thereby affecting blood pressure and functions of the heart and the nervous system. In comparison, extended periods of noise exposure above 90 dBA would result in permanent cell damage. Table 2 shows typical noise levels from various noise sources.

*Table 2  
Typical Noise Levels from Noise Sources*

<i>Common Outdoor Activities</i>	<i>Noise Level</i>	<i>Common Indoor Activities</i>
	110	Rock Band
Jet Flyover at 1,000 feet		
	100	
Gas Lawn Mower at three feet		
	90	
Diesel Truck at 50 feet, at 50 mph		Food Blender at 3 feet
	80	Garbage Disposal at 3 feet
Noisy Urban Area, Daytime		
	70	Vacuum Cleaner at 10 feet
Commercial Area		Normal speech at 3 feet
Heavy Traffic at 300 feet	60	
		Large Business Office
Quiet Urban Daytime	50	Dishwasher Next Room
Quiet Urban Nighttime	40	Theater, Large Conference Room (background)
Quiet Suburban Nighttime		
	30	Library
Quiet Rural Nighttime		Bedroom at Night, Concert Hall (background)
	20	
		Broadcast/Recording Studio
	10	
Lowest Threshold of Human Hearing	0	Lowest Threshold of Human Hearing

Source: California Department of Transportation 2009.

### *Vibration*

Vibration is an oscillatory motion through a solid medium in which the motion's amplitude can be described in terms of displacement, velocity, or acceleration. Vibration is normally associated with activities such as railroads or vibration-intensive stationary sources, but can also be associated with construction equipment, such as jackhammers, pile drivers, and hydraulic hammers. Vibration displacement is the distance that a point on a surface moves away from its original static position. The instantaneous speed that a point on a surface moves is described as the velocity, and the rate of change of the speed is described as the acceleration. Each of these descriptors can be used to correlate vibration to human response, building damage, and acceptable equipment vibration levels. During the construction of a building, the operation of construction equipment could cause groundborne vibration. The three main wave types of concern in the propagation of groundborne vibrations are surface or Rayleigh waves, compression or P-waves, and shear or S-waves.

- Surface or Rayleigh waves travel along the ground surface. They carry most of their energy along an expanding cylindrical wave front, similar to the ripples produced by throwing a rock into a lake. The particle motion is more or less perpendicular to the direction of propagation (known as retrograde elliptical).
- Compression or P-waves are body waves that carry their energy along an expanding

spherical wave front. The particle motion in these waves is longitudinal, in a push-pull motion. P-waves are analogous to airborne sound waves.

- Shear or S-waves are also body waves, carrying their energy along an expanding spherical wave front. Unlike P-waves, however, the particle motion is transverse, or perpendicular to the direction of propagation.

The peak particle velocity (PPV) or the root mean square (RMS) velocity is usually used to describe vibration amplitudes. PPV is defined as the maximum instantaneous peak of the vibration signal and RMS is defined as the square root of the average of the squared amplitude of the signal. PPV is more appropriate for evaluating potential building damage, whereas RMS is typically more suitable for evaluating human response.

The units for PPV and RMS velocity are normally inches per second (in/sec). Often, vibration is presented and discussed in dB units to compress the range of numbers required to describe the vibration. All PPV and RMS velocity are in in/sec and all vibration levels in this study are in dB relative to 1 micro-inch per second (abbreviated as VdB). The threshold of perception is approximately 65 VdB. Typically groundborne vibration generated by manmade activities attenuates rapidly with distance from the source of the vibration. Manmade vibration problems are usually confined to short distances (500 feet or less) from the source.

Construction generally includes a wide range of activities that can generate groundborne vibration. In general, demolition of structures generates the highest vibrations. Vibratory compactors or rollers, pile drivers, and pavement breakers can generate perceptible amounts of vibration at distances within 200 feet of the vibration sources. Heavy trucks can also generate groundborne vibrations that vary, depending on vehicle type, weight, and pavement conditions. Potholes, pavement joints, discontinuities, differential settlement of pavement, etc., all increase the vibration levels from vehicles passing over a road surface. Construction vibration is normally of greater concern than vibration of normal traffic on streets and freeways with smooth pavement conditions. Trains generate substantial quantities of vibration due to their engines, steel wheels, and heavy loads.

Operation of construction equipment generates vibrations that spread through the ground and diminish in amplitude (strength) with distance from the source. The effect on buildings near a construction site varies depending on soil type, ground strata, and receptor building construction. The generation of vibration can range from no perceptible effects at the lowest vibration levels, to low rumbling sounds and perceptible vibrations at moderate levels, to slight damage at the highest levels. Ground vibrations from construction activities rarely reach levels that can damage structures, but can achieve the perceptible ranges in buildings close to a construction site.

#### *Sensitive Receptors*

Certain land uses are particularly sensitive to noise and vibration. Noise- and vibration-sensitive uses include land uses where quiet environments are necessary for enjoyment and public health and safety. Residences, schools, guest lodging, libraries, religious institutions, hospitals, nursing homes, and passive recreation areas are generally more sensitive to noise than commercial and industrial land use.

### *NOISE AND VIBRATION REGULATORY ENVIRONMENT*

#### *Noise*

To limit exposure of people to intrusive and physically and/or psychologically damaging noise levels, the federal government, the State of California, some county governments, and most municipalities in the state have established standards and ordinances to control noise.

The United States Environmental Protection Agency (USEPA) has developed general guidelines for recommended maximum noise levels to protect public health and welfare and the hearing of workers exposed to occupational noise.

State

Cities and counties in California are preempted by federal law from controlling noise generated from most mobile sources, including noise generated by vehicles and trucks on the roadway, trains on the railroad, and airplanes. Table 3 shows a land use compatibility chart for community noise adopted by the State of California as part of General Plan Guidelines.<sup>1</sup> This table provides urban planners with a tool to gauge the compatibility of new land uses relative to existing and future noise levels. As shown in the table, hotels, motels, and other transient lodging are normally acceptable land uses up to a noise level of 65 dBA CNEL.

---

<sup>1</sup> California Office of Noise Control, *Guidelines for the Preparation and Content of Noise Elements of the General Plan*, February 1976. Included in the State of California General Plan Guidelines.

*Table 3  
Land Use Compatibility for Community Noise Exposure*

<i>Land Uses</i>	<i>CNEL (dBA)</i>					
	<i>55</i>	<i>60</i>	<i>65</i>	<i>70</i>	<i>75</i>	<i>80</i>
Residential-Low Density Single Family, Duplex, Mobile Homes						
Residential- Multiple Family						
Transient Lodging, Motels, Hotels						
Schools, Libraries, Churches, Hospitals, Nursing Homes						
Auditoriums, Concert Halls, Amphitheatres						
Sports Arena, Outdoor Spectator Sports						
Playgrounds, Neighborhood Parks						
Golf Courses, Riding Stables, Water Recreation, Cemeteries						
Office Buildings, Businesses, Commercial and Professional						
Industrial, Manufacturing, Utilities, Agricultural						

*Explanatory Notes*

	<b>Normally Acceptable:</b> Specified land use is satisfactory based upon the assumption that any buildings involved are of normal conventional construction, without any special noise insulation requirements.		<b>Normally Unacceptable:</b> New construction or development should generally be discouraged. If new construction does proceed, a detailed analysis of the noise reduction requirements must be made and needed noise insulation features included in the design.
	<b>Conditionally Acceptable:</b> New construction or development should be undertaken only after a detailed analysis of the noise reduction requirements is made and the needed noise insulation features included in the design. Conventional construction, but with closed windows and fresh air supply systems or air conditioning will normally suffice.		<b>Clearly Unacceptable:</b> New construction or development should generally not be undertaken.

Source: California Office of Noise Control, Guidelines for the Preparation and Content of Noise Elements of the General Plan, February 1976. Included in the State of California General Plan Guidelines.

## Local – City of Cupertino

The Noise Ordinance is designed to control unnecessary, excessive, and annoying sounds by setting limits that cannot be exceeded at adjacent properties. The Noise Ordinance requirements are not applicable to mobile noise sources (such as cars and heavy trucks) that are traveling on public roadways. Control of the mobile noise sources on public roads is preempted by federal and State laws. However, the Noise Ordinance does apply to vehicles while they are on private property.

Section 10.48.020 of the City's Municipal Code states that the noise control program established by Municipal Code Chapter 10.48, Community Noise Control, of Title 10, Public Peace, Safety, and Morals, shall be administered by and is the responsibility of, the Noise Control Officer (NCO).

Section 10.48.021 of the City's Municipal Code states that the NCO shall have, in addition to any other vested authority, the power to:

- A. Review of Public and Private Projects. Review of public and private projects, subject to mandatory review or approval by other departments, for compliance with this ordinance, if such projects are likely to cause noise in violation of Municipal Code Chapter 10.48;
- B. Inspections. Upon presentation of proper credentials and with permission of the property owner or occupant, enter and investigate a potential ordinance violation on any property or place, and inspect any report or records at any reasonable time. If permission is refused or cannot be obtained, a search warrant may be obtained from a court of competent jurisdiction upon showing of probable cause to believe that a violation of this chapter may exist. Such inspection may include administration of any necessary tests.

Section 10.48.022 of the City's Municipal Code requires the NCO, within a reasonable time after the effective date of the ordinance codified in Municipal Code Chapter 10.48, to:

- A. Guidelines, Testing Methods and Procedures. Develop and promulgate guidelines, testing methods and procedures as required. Any noise measurement procedure used in enforcement of Municipal Code Chapter 10.48 which tends to underestimate the actual noise level of the source being measured shall not invalidate the enforcement action;
- B. Investigate and Pursue Violations. In consonance with provisions of Municipal Code Chapter 10.48, investigate and pursue possible violations;
- C. Delegation of Authority. Delegate functions, where appropriate under Municipal Code Chapter 10.48, to other personnel and to other departments, subject to approval of the City Manager.

Section 10.48.023 of the City's Municipal Code establishes the duties and responsibilities of other departments:

- A. Departmental Actions. All City departments shall, to the fullest extent consistent with other law, carry out their programs in such a manner as to further the policy and intent of Municipal Code Chapter 10.48.
- B. Project Approval. All departments whose duty it is to review and approve new projects, or changes to existing projects, that may result in the production of disturbing noise, shall consult with the NCO prior to any such approval.

- C. Contracts. Any written contract, agreement, purchase order, or other instrument whereby the City is committed to the expenditure of \$5,000 dollars or more in return for goods or services, and which involves noise-producing activities, shall contain provisions requiring compliance with Municipal Code Chapter 10.48.

Section 10.48.029 of the City's Municipal Code allows construction conducted by the homeowner or resident of a single dwelling, using domestic construction tools is allowed on holidays between the hours of 9:00 a.m. and 6:00 p.m.

Section 10.48.030 of the City's Municipal Code states that provisions of Municipal Code Chapter 10.48 shall not apply to the emission of sound for the purpose of alerting persons to the existence of an emergency, or the emission of sound in the performance of emergency work.

Section 10.48.031 of the City's Municipal Code establishes special exceptions from Municipal Code Chapter 10.48:

- A. The NCO shall have the authority, consistent with this section, to grant special exceptions which may be requested.
- B. Any person seeking a special exception pursuant to this section shall file an application with the NCO. The application shall contain information which demonstrates that bringing the source of sound, or activity for which the special exception is sought, into compliance with this chapter would constitute an unreasonable hardship on the applicant, on the community, or on other persons. Prior to issuance of an exception, the NCO shall notify owners and/or occupants of nearby properties which may be affected by such exceptions. Any individual who claims to be adversely affected by allowance of the special exceptions may file a statement with the NCO containing any information to support his claim. If the NCO finds that a sufficient controversy exists regarding an application, a public hearing may be held.
- C. In determining whether to grant or deny the application, the NCO shall balance the hardship to the applicant, the community, and other persons of not granting the special exception against the adverse impact on the health, safety, and welfare of persons affected, the adverse impact on property affected, and any other adverse impacts of granting the special exception. Applicants for special exceptions and persons contesting special exceptions may be required to submit any information the NCO may reasonably require. In granting or denying an application, the NCO shall place on public file a copy of the decision and the reasons for denying or granting the special exception.
- D. Special exceptions shall be granted by notice to the applicant containing all necessary conditions, including a time limit on the permitted activity. The special exception shall not become effective until all conditions are agreed to by the applicant. Noncompliance with any condition of the special exception shall terminate it and subject the person holding it to those provisions of this chapter regulating the source of sound or activity for which the special exception was granted.
- E. Application for extension of time limits specified in special exceptions or for modification of other substantial conditions shall be treated like applications for initial special exceptions under subsection B of this section.

Section 10.48.032 of the City's Municipal Code states that appeals of any decision of the NCO shall be made to the City Council.

Section 10.48.040 of the City’s Municipal Code sets daytime and nighttime maximum noise levels for residential and non-residential land uses, presented in Table 4 below.

<i>Land use at point of origin</i>	<i>Maximum Noise Level at Complaint Site of Receiving Property (A-Decibels)</i>	
	<i>Nighttime</i>	<i>Daytime</i>
Residential	50	60
Non-residential	55	65

Section 10.48.050 of the City’s Municipal Code allows brief noise incidents exceeding the limits shown in Table 4 above during the daytime period only; providing, that the sum of the noise duration in minutes plus the excess noise level does not exceed twenty in a two-hour period. A noise increment of 5 dBA is allowed for up to 15 minutes in a 2-hour period, or an increment of 10 dBA for up to 10 minutes in a 2-hour period, or an increment of 15 dBA for up to 5 minutes in a 2-hour period, or an increment of 20 dBA for up to 1 minute in a 2-hour period.

Section 10.48.041 of the City’s Municipal Code limits the use of motorized equipment for landscape maintenance activities to the hours of 8:00 a.m. to 8:00 p.m. on weekdays, and 9:00 a.m. to 6:00 p.m. on weekends and holidays, with the exception of landscape maintenance activities for public schools, public and private golf courses, and public facilities, which are allowed to begin at 7:00 a.m. The use of motorized equipment for landscape maintenance activities during these hours is exempted from the limits of Section 10.48.040; provided, that reasonable efforts are made by the user to minimize the disturbances to nearby residents by, for example, installation of appropriate mufflers or noise baffles, running equipment only the minimal period necessary, and locating equipment so as to generate minimum noise levels on adjoining properties.

Section 10.48.052 of the City’s Municipal Code allows outdoor events open to the general public on nonresidential property, such as parades, rallies, fairs, concerts and special sales and promotional events, involving generation of noise levels higher than would normally occur, by use of the human voice, public address systems, musical instruments, electronic amplification systems, and similar sound-producing activities, upon obtaining an appropriate permit from the city, and subject to the following general limitations:

- The event shall not produce noise levels above 70 dBA on any residential property for a period longer than three hours during daytime.
- The event shall not produce noise levels above 60 dBA on any residential property during the period from eight p.m. to eleven p.m., and above 55 dBA for any other nighttime period.
- Continuous or repeated peak noise levels above 95 dBA shall not be produced at any location where persons may be continuously exposed.

The conditions imposed upon the event or activity in the permit issued by the City, regarding maximum noise level, location of noise sources, or duration of activity, for example, may be more limiting than this



section, to protect certain individuals, areas or nearby activities which would otherwise be disturbed, and these permit conditions, when in conflict with this section, are overriding.

Section 10.48.053 of the City's Municipal Code allows grading, construction, and demolition activities to exceed the noise limits of Section 10.48.040 during the daytime hours (7:00 a.m. to 8:00 p.m. on weekdays and 9:00 a.m. to 6:00 p.m. on weekends), provided that the equipment utilized has high-quality noise muffler and abatement devices installed and in good condition. In addition, the activity must meet one of the following two criteria:

1. No individual device produces a noise level more than 87 dBA at a distance of 25 feet (7.5 meters); or
2. The noise level on any nearby property does not exceed 80 dBA.

This section also prohibits construction activities within seven hundred fifty feet of a residential area on Saturdays, Sundays and holidays, and during the nighttime period (8:00 p.m. to midnight, and from midnight to 7:00 a.m., and periods on weekends from 6:00 p.m. to midnight and from midnight to 9:00 a.m.), unless it meets the nighttime standards of Section 10.48.040 listed in Table 4 above.

Section 10.48.054 of the City's Municipal Code prohibits noise produced in any multiple-family dwelling unit from producing a noise level exceeding 45 dBA five feet from any wall in any adjoining unit during the period between 7:00 a.m. and 10:00 p.m., or exceeding 40 dBA during hours from 10:00 p.m. to 7:00

**a.m.** the following day.

Section 10.48.055 of the City's Municipal Code prohibits motor vehicles, including automobiles, trucks, motorcycles, motor scooters and trailers or other equipment towed by a motor vehicle, from remaining in one location with the engine or auxiliary motors running for more than three minutes in any hour, in an area other than on a public right-of-way, unless:

- The regular noise limits of Section 10.48.040 are met while the engine and/or auxiliary motors are running; or
- The vehicle is in use for provision of police, fire, medical, or other emergency services.

Section 10.48.056 of the City's Municipal Code establishes the ownership or operation of a motor vehicle, including automobiles, trucks, motorcycles and other similar devices of a type subject to registration, as defined in California Vehicle Code, which has a faulty, defective, deteriorated, modified, replaced, or no exhaust and/or muffler system, and which produces an excessive and disturbing noise level, as defined in California Vehicle Code Sections 27150 and 27151, as a violation of Municipal Code Chapter 10.48.

The Stationary Vehicle Test Procedure, as adopted by the California Highway Patrol, may be utilized as prima facie evidence of violation of this section.

Section 10.48.057 of the City's Municipal Code establishes ownership or operation of the following as a violation of Municipal Code Chapter 10.48:

- Any off-road recreational vehicle, including all-terrain vehicles, dirt bikes, dune buggies and other similar devices, as defined in Division 16.5 of the California Vehicle Code, which has a faulty, defective, deteriorated, modified, replaced, or no exhaust and/or muffler system, and which produces an excessive and disturbing noise level, as specified in California Vehicle Code Section 38365;

- Any off-road recreational vehicle producing a noise level:
  1. Exceeding 98 dBA within twenty inches of any component at an intermediate engine speed of 2,000 to 4,000 revolutions per minute in a stationary position; or
  2. Exceeding 80 dBA under any condition of acceleration, speed, grade, and load at a distance of 50 feet. At greater or lesser measurement distances, the maximum noise level changes by 4 dB for each doubling or halving of distance. The sound level meter shall be set for FAST response for this measurement.

Section 10.48.061 of the City's Municipal Code establishes it as unlawful and a nuisance for any person to keep, maintain or permit upon any lot or parcel of land within the City under his control any animal, including any fowl, which by any sound or cry shall habitually disturb the peace and comfort of any person in the reasonable and comfortable enjoyment of life or property.

Section 10.48.062 of the City's Municipal Code establishes it as unlawful and a nuisance for any person to make or allow vehicular deliveries or pickups to or from commercial establishments (defined as any store, factory, manufacturing, or industrial plant used for the sale, manufacturing, fabrication, assembly or storage of goods, wares and merchandise) by the use of private roads, alleys or other ways located on either side or the back of any building housing the commercial establishment where such private road, alley or other way lies between the building and any adjacent parcel of land zoned for residential purposes, between the hours of 8:00 p.m. and 8:00 a.m. weekdays (Monday through Friday) and 6:00

p.m. and 9:00 a.m. on weekends (Saturday and Sunday) and holidays except as may be permitted under Section 10.48.029.

Section 10.48.070 of the City's Municipal Code states that any person who violates the provisions of this chapter shall be guilty of a misdemeanor and upon conviction thereof shall be punished as provided in Chapter 1.12.

#### *Vibration*

Cupertino General Plan Policy 6-62, Construction and Maintenance Activities, requires construction contractors to use the best available technology to minimize excessive noise and vibration from construction equipment such as pile drivers, jack hammers, and vibratory rollers. Methods to reduce vibration during construction would include the use of smaller equipment, use of well-maintained equipment, use of static rollers instead of vibratory rollers, and drilling of piles as opposed to pile driving. The City's Municipal Code, however, establishes no specific vibration regulations. In addition, there are no applicable state regulations.

For the purpose of this analysis, thresholds provided by the Federal Transit Administration (FTA) are utilized. The human reaction to various levels of vibration varies from person to persons and is highly subjective. Table 5 shows the level at which vibration becomes perceptible based on various types of land uses that are sensitive to vibration.

*Table 5 Vibration  
Perceptibility*

<b>Land Use Category</b>	<b>Max <math>L_v</math> (VdB)<sup>1</sup></b>	<b>Description</b>
Workshop	90	Distinctly felt vibration. Appropriate to workshops and nonsensitive areas
Office	84	Felt vibration. Appropriate to offices and non-sensitive areas.
Residential – Daytime	78	Barely felt vibration. Adequate for computer equipment.
Residential – Nighttime	72	Vibration not felt, but groundborne noise may be audible inside quietrooms.

Source: FTA 2006.

<sup>1</sup> As measured in 1/3 octave bands of frequency over the frequency ranges of 8 to 80 Hz.

In addition to the vibration standards for human annoyance, the FTA also has vibration standards for architectural damage, as shown in Table 6. Architectural damage is possible when the peak particle velocity (PPV) exceeds 0.2 inch per second. This criterion is the threshold at which there is a risk of damage to residential buildings. For structures of reinforced concrete, steel, or timber, architectural damage is possible when the PPV exceeds 0.5 inch per second.

*Table 6  
Groundborne Vibration Impact Criteria, Architectural Damage*

<b>Building Category</b>	<b>PPV (inches per second)<sup>1</sup></b>	<b>VdB</b>
I. Reinforced concrete, steel, or timber (no plaster)	0.5	102
II. Engineered concrete and masonry (no plaster)	0.3	98
III. Nonengineered timber and masonry buildings	0.2	94
IV. Buildings extremely susceptible to vibration damage	0.12	90

Source: FTA 2006.

<sup>1</sup> RMS velocity calculated from vibration level (VdB) using the reference of one micro-inch per second.

## REFERENCES

California Department of Transportation (Caltrans). 2009. Technical Noise Supplement.

Bies, David A. and Colin H. Hansen. 2003. *Engineering Noise Control: Theory and Practice*. 3rd ed. New York: Spoon Press.

Cupertino, City of. 2012, September. Municipal Code, City of Cupertino, California.

Federal Transit Administration (FTA). 2006, May. *Transit Noise and Vibration Impact Assessment*. United States Department of Transportation. FTA-VA-90-1003-06.

Governor's Office of Planning and Research. 2003, October. *State of California General Plan Guidelines*. Thalheimer, E.

2000. Construction Noise Control Program and Mitigation Strategy as the Central Artery/Tunnel Project. Institute of Noise Control Engineering.

United States Environmental Protection Agency (USEPA). 1974, March. Information on Levels of Environmental Noise Requisite to Protect Public Health and Welfare with an Adequate Margin of Safety. Office of Noise Abatement and Control.

# **Marina Plaza**

## **Draft Transportation Impact Analysis**

**Prepared for:  
City of Cupertino**

April 2016

DC16-0009

**FEHR  PEERS**

## Table of Contents

<b>EXECUTIVE SUMMARY .....</b>	<b>V</b>
<b>1. INTRODUCTION.....</b>	<b>1</b>
1.1 Project Description .....	1
1.2 Study Area.....	4
1.2.1 Study Intersections .....	4
1.2.2 Freeway Segments .....	5
1.2.3 Pedestrian, Bicycle, and Transit Facilities .....	5
1.3 Analysis Scenarios.....	5
1.4 Analysis Methods.....	6
1.4.1 Signalized Intersections .....	6
1.4.2 Unsignalized Intersections.....	7
1.4.3 Freeway Segments .....	7
1.5 Level of Service Standards and Impact Criteria.....	8
1.5.1 Signalized Intersections .....	8
1.5.2 Freeway Segments .....	9
1.6 Report Organization .....	10
<b>2. EXISTING CONDITIONS .....</b>	<b>11</b>
2.1 Existing Roadway Network.....	11
2.2 Pedestrian Facilities.....	12
2.3 Bicycle Facilities.....	12
2.4 Transit Service.....	16
2.4.1 VTA Bus Service.....	16
2.4.2 Commuter Rail Service .....	17
2.5 Existing Intersection Volumes and Lane Configurations.....	20
2.6 Existing Intersection Level of Service .....	20
2.7 Existing Freeway Segment Level of Service .....	23
<b>3. PROJECT TRAFFIC ESIMATES.....</b>	<b>25</b>
3.1 Trip Generation .....	25
3.1.1 MainStreet Mixed-Use Trip Generation.....	25



3.1.2	Pass-by and Diverted Trip Reductions .....	26
3.1.3	Trip Estimates .....	27
3.2	Trip Distribution and Trip Assignment .....	29
<b>4.</b>	<b>EXISTING PLUS PROJECT CONDITIONS .....</b>	<b>32</b>
4.1	Existing plus Project Volumes .....	32
4.2	Existing plus Project Intersection Level of Service .....	32
4.3	Existing plus Project Intersection Impacts and Mitigation measures.....	35
4.4	Existing plus Project Freeway Segment Level of Service .....	35
4.5	Existing plus Project Freeway Segment Impacts and Mitigation Measures .....	35
<b>5.</b>	<b>BACKGROUND CONDITIONS .....</b>	<b>37</b>
5.1	Background Traffic Volumes.....	37
5.2	Background plus Project Traffic Volumes .....	37
5.3	Background Intersection Level of Service .....	37
5.4	Background Intersection Impacts and Mitigation Measures.....	37
<b>6.</b>	<b>SITE ACCESS, ON-SITE CIRCULATION, MULTI-MODAL TRANSPORTATION, AND PARKING ASSESSMENT.....</b>	<b>41</b>
6.1	Vehicle Access and Circulation Review.....	41
6.2	Pedestrian Access and Circulation .....	41
6.3	Bicycle Access and Circulation .....	42
6.4	Transit Network.....	42
6.5	Transit Evaluation .....	44
6.5.1	Transit Site Access.....	44
6.5.2	Transit Vehicle Capacity.....	44
6.5.3	Transit Vehicle Delay (For Informational Purposes).....	44
6.6	Parking Assessment .....	45
6.6.1	Vehicle Parking.....	45
6.6.2	Bicycle Parking.....	46





## Appendices

- Appendix A: Existing Traffic Counts
- Appendix B: Existing And Existing Plus Project Intersection Level of Service Calculations
- Appendix C: Mainstreet MXD Reductions
- Appendix D: Background and Background Plus Project Intersection Level Of Service Calculations
- Appendix E: Approved, Not Occupied, and Pending Projects

## List of Figures

Figure 1-1: Study Area .....	2
Figure 1-2: Site Plan.....	3
Figure 2-1: Existing Pedestrian and Bicycle Facilities .....	15
Figure 2-2: Existing Transit Facilities .....	19
Figure 2-3: Existing Peak Hour Traffic Volumes and Lane Configurations .....	22
Figure 3-1: Project Trip Distribution .....	30
Figure 3-2: Project Trip Assignment .....	31
Figure 4-1: Existing plus Project Peak Hour Traffic Volumes and Lane Configurations .....	33
Figure 5-1: Background Peak Hour Traffic Volumes and Lane Configurations .....	38
Figure 5-2: Background plus Project Peak Hour Traffic Volumes and Lane Configurations .....	39

## List of Tables

Table 1-1: Study Intersections .....	4
Table 1-2: Signalized Intersection Level of Service Definitions.....	6
Table 1-3: Unsignalized Intersection Level of Service Definitions .....	7
Table 1-4: Freeway Segment Level of Service Definitions.....	8
Table 1-5: Signalized Intersection LOS Standards.....	8
Table 2-1: Existing Transit Service.....	18
Table 2-2: Existing Intersection Level of Service Results .....	21
Table 2-3: Existing Freeway Level of Service Results .....	24
Table 3-1: Vehicle Trip Generation Estimates .....	28
Table 4-1: Existing Plus Project Intersection Level of Service Results .....	34







Table 4-2: Existing Plus Project Freeway Level of Service Results.....	36
Table 5-1: Background Plus Project Intersection Level of Service Results.....	40
Table 6-1: Transit Vehicle Delay .....	44
Table 6-2: Summary of Vehicle Parking at the Project Site .....	46



## EXECUTIVE SUMMARY

This report presents the results of the transportation impact analysis (TIA) for the proposed redevelopment of the Marina Plaza mixed use development (the Project) located at 10122 Bandley Drive. The existing uses on the site include neighborhood retail, commercial and restaurant land uses. The Project proposes a mix of land uses, including approximately 122 hotel rooms, 188 apartment units and 22,600 square feet of commercial uses. The proposed site plan shows three buildings. Building A will provide the 122 hotel rooms, while Buildings B and C, both providing a combination of apartment, ground floor retail and restaurant uses, are connected by a common subterranean parking garage.

The proposed Project was recently evaluated as part of the City of Cupertino's General Plan Amendment and associated Environmental Impact Report (EIR). Thus this analysis tiers off of the General Plan EIR and focuses on Existing and Background Conditions with and without the Project.

### PROJECT TRAFFIC ESTIMATES

The Project is estimated to generate 107 net new AM peak hour vehicle trips (29 inbound and 77 outbound) and in the PM peak hour will generate 82 fewer trips compared to the existing uses (31 fewer inbound and 51 fewer outbound).

### INTERSECTION IMPACTS AND MITIGATION MEASURES

Intersection impacts were evaluated for Existing and for Background Conditions.

#### *EXISTING PLUS PROJECT CONDITIONS*

Based on the impact criteria presented in Section 1.5, the Project is expected to have a **less-than-significant** impact at all 9 study intersections evaluated in this TIA under Existing plus Project conditions.

#### *BACKGROUND PLUS PROJECT CONDITIONS*

Based on the impact criteria presented in Section 1.5, the Project is expected to have a **less-than-significant** impact at all 9 study intersections evaluated in this TIA under Background plus Project conditions.

### FREEWAY IMPACTS AND MITIGATION MEASURES

Freeway impacts are evaluated under the Existing plus Project Conditions only. Under this scenario, the Project would not degrade acceptable operating segments to unacceptable levels and would not add trips greater than one percent of the freeway capacity to the freeway study segments operating unacceptably during the AM and PM peak hours. Therefore, the Project would have a **less-than-significant** freeway impact based on VTA's impact criteria.



## **SITE ACCESS AND CIRCULATION**

The site plan, dated March 2016, illustrates the locations of the Project driveway and internal circulation system for auto, pedestrian, and bicycle traffic. The Project provides access via two driveways on Alves Drive, one driveway on Bandley Drive, and one driveway on Stevens Creek Boulevard. All driveways provide full access with the exception of the driveway on Stevens Creek Boulevard which is right-turn only inbound and outbound. The Project includes three buildings, Building A, Building B, and Building C. Building A has access from a driveway on Alves Drive. Buildings B and C share a common subterranean parking garage and therefore vehicles may access them from three out of the four driveways. Vehicle circulation in the parking structure will consist of ramps that allow for residents/visitors to access all levels of the garage. Emergency vehicle access for the Project perimeters will be provided by a dual use road off Alves Drive.

## **PEDESTRIAN AND BICYCLE FACILITIES**

Sidewalks are provided along the frontage of the Project site along Alves Drive north of the Project site and Bandley Drive west of the Project site. There are crosswalks at all four approaches at the intersection of Alves Drive and Bandley Drive, northwest of the Project site, and at the Bandley Drive and Stevens Creek Boulevard intersection, south of the Project site. Pedestrian walkways are also proposed within the site plan for safe connections between buildings, particularly between the hotel and nearby retail and restaurants on Stevens Creek Boulevard. Bicycle access to the Marina Plaza development is accommodated by bicycle lanes (Class II) on surrounding roadways such as De Anza Boulevard and Stevens Creek Boulevard and bike routes (Class III) on Bandley Drive and Alves Drive.

## **VEHICLE AND BICYCLE PARKING**

Based on the requirements of City of Cupertino, the Project is required to provide 666 vehicle parking spaces. The Project proposes to provide 667 vehicle parking spaces, which is slightly more than the required amount. It is noted that the City's Municipal Code does allow for shared parking adjustments for mixed-use developments and as a result there could be opportunities to reduce the Project's parking provision on this basis.

Marina Plaza is required to provide 90 bicycle parking spaces. The proposed site plan does not indicate whether any type of bicycle storage facilities will be provided. It is recommended that additional bicycle parking as a combination of Class I and Class II facilities per NACTO guidelines. Class I, or long term, facilities will benefit hotel guests and apartment residents. Class II, or short term, facilities will benefit restaurant and retail patrons.



# 1. INTRODUCTION


This report presents the findings of the Marina Plaza mixed-use development (Project) transportation impact analysis (TIA). The 5.1-acre development site is located in Cupertino, California at the southeast corner of the Bandley Drive/Alves Drive intersection. The purpose of this analysis is to identify potentially significant adverse impacts of the Project on the surrounding transportation system and to recommend measures to mitigate significant impacts. The proposed Project was recently evaluated as part of the City of Cupertino's General Plan Amendment and associated Environmental Impact Report (EIR). Thus this analysis tiers off of the General Plan EIR and focuses on Existing and Background Conditions with and without the Project.

The TIA was prepared following the guidelines of the City of Cupertino and Santa Clara Valley Transportation Authority (VTA), the congestion management agency for Santa Clara County. The VTA Congestion Management Program (CMP) TIA Guidelines (last updated in October 2014) present guidelines for assessing the transportation impacts of development projects and identifying whether improvements are needed to adjacent roadways, bike facilities, sidewalks, and transit services affected by the Project. The TIA guidelines have been adopted by local agencies within Santa Clara County, and are applied to analyze both the local and regional transportation systems.

## 1.1 PROJECT DESCRIPTION

The Marina Plaza site is approximately 5.1 acres and is located at the southeast corner of the Bandley Drive/Alves Drive intersection. The site currently has a mix of neighborhood retail uses, including a large grocery store, and a small medical office. The Project entails removing the existing uses and redeveloping the site to include a mix of hotel, residential, and commercial (retail and restaurant) uses. The Project will maintain the four existing driveways, two on Alves Drive, one on Bandley Drive, and one driveway which provides direct access to and from Stevens Creek Boulevard. The proposed site plan shows three buildings. Building A will provide 122 hotel rooms, while Buildings B and C will provide 188 apartment units and 22,600 square feet of restaurant and retail uses combined. Building B and C have a common subterranean garage which residents and patrons may access from either Alves Drive, Bandley Drive, or Stevens Creek Boulevard.

The site is generally bounded by Alves Drive to the north, De Anza Boulevard to the east, Stevens Creek Boulevard to the south, and Bandley Drive to the west. The site location and study area are shown in **Figure 1-1**. The proposed site plan is presented in **Figure 1-2**.

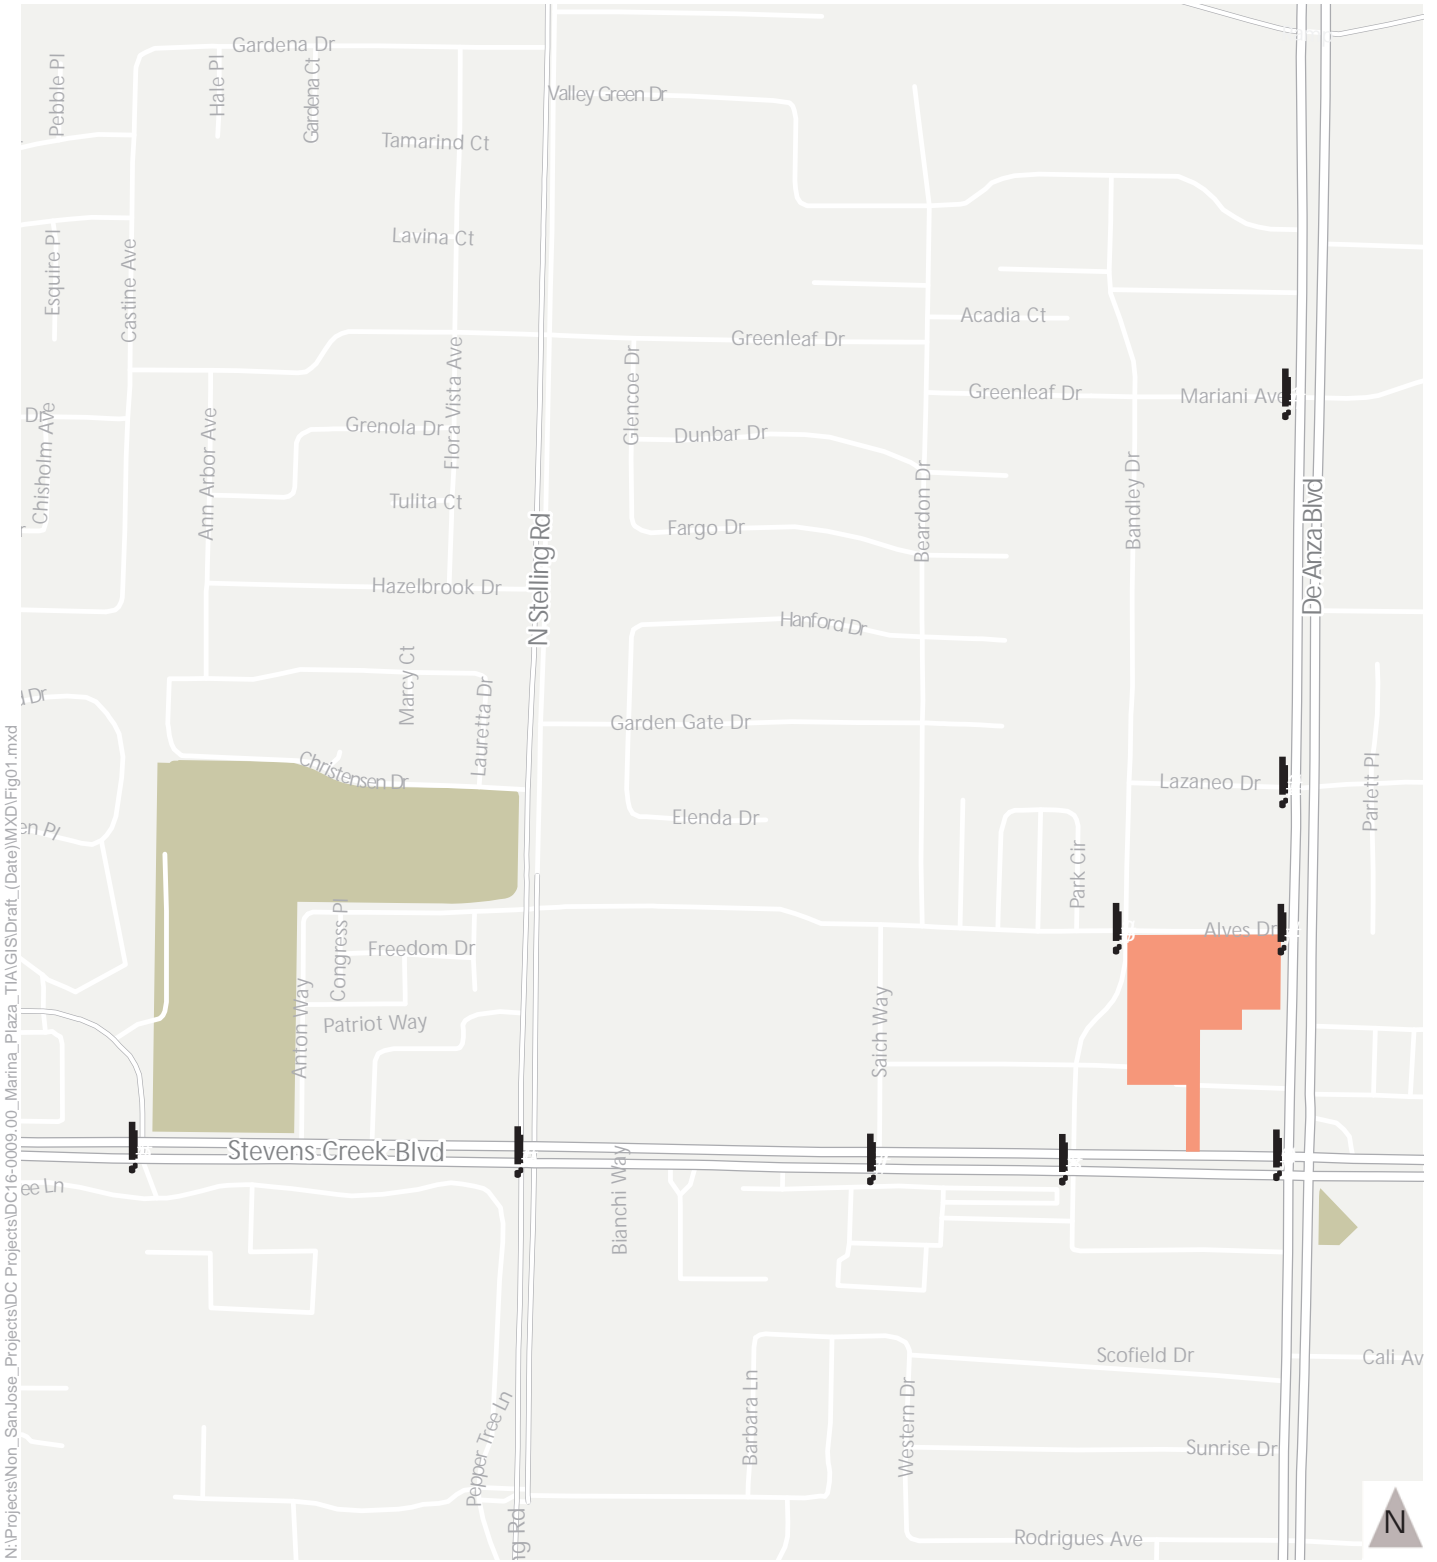

- ! Intersections
- Project Site



Figure 1-1  
Study Area



Figure 1-2  
Site Plan



## 1.2 STUDY AREA

The study area generally extends along De Anza Boulevard between I-280 and Stevens Creek Boulevard and along Stevens Creek Boulevard between SR 85 and De Anza Boulevard. The roadway impacts of the proposed Project were evaluated for the intersections and freeway segments discussed below.

### 1.2.1 STUDY INTERSECTIONS

The list of study intersections is presented in **Table 1-1**. Study intersections were selected in consultation with the City of Cupertino and generally determined based on VTA's 10 trips per lane guideline, which indicates that intersections should be included if the Project adds 10 or more peak hour vehicles per lane to any intersection movement.

**TABLE 1-1: STUDY INTERSECTIONS**

ID #	Intersection	Jurisdiction / CMP <sup>1</sup>
1	De Anza Boulevard and Mariani Avenue	Cupertino
2	De Anza Boulevard and Lazaneo Drive	Cupertino
3	Bandley Drive and Alves Drive	Cupertino
4	De Anza Boulevard and Alves Drive	Cupertino
5	Mary Avenue and Stevens Creek Boulevard	Cupertino
6	N. Stelling Road and Stevens Creek Boulevard	Cupertino/CMP
7	Saich Way and Stevens Creek Boulevard	Cupertino
8	Bandley Drive and Stevens Creek Boulevard	Cupertino
9	De Anza Boulevard and Stevens Creek Boulevard	Cupertino/CMP

Notes:

1. Congestion Management Program (CMP) indicates the intersection is part of VTA's CMP monitoring program.

Source: Fehr & Peers, 2016.

## 1.2.2 FREEWAY SEGMENTS

Freeway segments were also selected in consultation with the City of Cupertino following VTA guidelines. The following segments on I-280 and SR 85 were selected for analysis because the Project site is adjacent to these routes.

### I-280 (Eastbound and Westbound)

- SR-85 to De Anza Boulevard
- De Anza Boulevard to Wolfe Road

### SR-85 (Northbound and Southbound)

- Saratoga-Sunnyvale Road to Stevens Creek Boulevard
- Stevens Creek Boulevard to I-280

## 1.2.3 PEDESTRIAN, BICYCLE, AND TRANSIT FACILITIES

Project impacts to pedestrian facilities within approximately a quarter-mile radius and bicycle facilities and transit service within approximately a half-mile radius from the Project site are also addressed.

## 1.3 ANALYSIS SCENARIOS

The operations of the study intersections were evaluated during the weekday morning (AM) and weekday evening (PM) peak hours for the following scenarios:

- Scenario 1:** Existing Conditions – Existing volumes obtained from counts.
- Scenario 2:** Existing plus Project Conditions – Scenario 1 volumes plus net-added traffic generated by the proposed Project.
- Scenario 3:** Background Conditions – Existing volumes plus traffic from “approved but not yet built” and “not occupied” developments in the area.
- Scenario 4:** Background plus Project Conditions – Scenario 3 volumes plus traffic generated by the proposed Project.

Freeway segments were analyzed following the VTA guidelines under the Existing plus Project scenario.



## 1.4 ANALYSIS METHODS

The operations of roadway facilities are described with the term *level of service*. Level of Service (LOS) is a qualitative description of traffic flow based on factors such as speed, travel time, delay, and freedom to maneuver. Six levels are defined from LOS A, the best operating conditions, to LOS F, the worst operating conditions. LOS E represents “at-capacity” operations. When traffic volumes exceed the intersection capacity, stop-and-go conditions result, and operations are designated as LOS F.

### 1.4.1 SIGNALIZED INTERSECTIONS

The method described in Chapter 16 of the 2000 *Highway Capacity Manual* (2000 HCM) (Special Report 209, Transportation Research Board) was used to prepare the level of service calculations for the study intersections. This level of service method analyzes a signalized intersection’s operation based on average control delay per vehicle. Control delay includes the initial deceleration delay, queue move-up time, stopped delay, and final acceleration delay. The average control delay for signalized intersections is calculated using TRAFFIX analysis software and is correlated to a LOS designation as shown in **Table 1-2**.

**TABLE 1-2: SIGNALIZED INTERSECTION LEVEL OF SERVICE DEFINITIONS**

Level of Service	Description	Average Control Delay per Vehicle (seconds)
A	Operations with very low delay occurring with favorable progression and / or short cycle lengths.	≤ 10.0
B	Operations with low delay occurring with good progression and / or short cycle lengths.	10.1 to 20.0
C	Operations with average delays resulting from fair progression and / or longer cycle lengths. Individual cycle failures begin to appear.	20.1 to 35.0
D	Operations with longer delays due to a combination of unfavorable progression, long cycle lengths, and high volume-to-capacity (V / C) ratios. Many vehicles stop and individual cycle failures are noticeable.	35.1 to 55.0
E	Operations with high delay values indicating poor progression, long cycle lengths, and high V / C ratios. Individual cycle failures are frequent occurrences.	55.1 to 80.0
F	Operations with delays unacceptable to most drivers occurring due to over-saturation, poor progression, or very long cycle lengths.	> 80.0

Source: *Traffic Level of Service Analysis Guidelines*, VTA Congestion Management Program, June 2003; and *Highway Capacity Manual*, Transportation Research Board, 2000.

## 1.4.2 UNSIGNALIZED INTERSECTIONS

The operations of the unsignalized intersections were evaluated using the method contained in Chapter 17 of the *2000 HCM*. Only two of the study intersections are unsignalized both of which are all-way stop controlled intersections. LOS ratings for all-way stop-controlled intersections are based on the average control delay expressed in seconds per vehicle. **Table 1-3** summarizes the relationship between delay and LOS for unsignalized intersections. Additionally, the City of Cupertino applies the 2014 *California Manual on Uniform Traffic Control Devices* (MUTCD) peak-hour volume signal warrant to evaluate operations at unsignalized intersections operating at LOS F.

**TABLE 1-3: UNSIGNALIZED INTERSECTION LEVEL OF SERVICE DEFINITIONS**

Level of Service	Description	Average Control Delay Per Vehicle (Seconds)
A	Little or no delay.	≤ 10.0
B	Short traffic delay.	10.1 to 15.0
C	Average traffic delays.	15.1 to 25.0
D	Long traffic delays.	25.1 to 35.0
E	Very long traffic delays.	35.1 to 50.0
F	Extreme traffic delays with intersection capacity exceeded.	> 50.0

Sources: *Traffic Level of Service Analysis Guidelines*, October 2014; VTA Congestion Management Program, June 2003; *Highway Capacity Manual*, Transportation Research Board, 2000.

## 1.4.3 FREEWAY SEGMENTS

Freeway segments were evaluated using VTA's analysis procedure, which is based on the density of the traffic flow using methods described in the 2000 HCM. Density is expressed in passenger cars per mile per lane. The Congestion Management Program ranges of densities for each freeway segment level of service designation are shown in

**Table 1-4.**

**TABLE 1-4: FREEWAY SEGMENT LEVEL OF SERVICE DEFINITIONS**

Level of Service	Density (passenger cars per mile per lane)
A	≤ 11
B	11.1 to 18.0
C	18.1 to 26.0
D	26.1 to 46.0
E	46.1 to 58.0
F	> 58.0

Sources: *Traffic Level of Service Analysis Guidelines*, VTA Congestion Management Program, June 2003; *Highway Capacity Manual*, Transportation Research Board, 2000.

## 1.5 LEVEL OF SERVICE STANDARDS AND IMPACT CRITERIA

The determination of significance for Project impacts is based on applicable policies, regulations, goals, and guidelines defined by the City of Cupertino and VTA. The impact criteria presented below focuses on elements of the CEQA checklist pertaining to roadway system operations and its effects on users, including drivers, pedestrians, bicyclists, transit passengers, and first responders in emergency access vehicles.

### 1.5.1 SIGNALIZED INTERSECTIONS

Signalized intersection operations and impacts are evaluated based on the appropriate jurisdiction's LOS standards (i.e., minimum threshold for acceptable operations) as shown in **Table 1-5**.

**TABLE 1-5: SIGNALIZED INTERSECTION LOS STANDARDS**

Jurisdiction	Intersection LOS Standards
City of Cupertino	LOS D for all City-controlled signalized intersections except at the N. Stelling Rd./Stevens Creek Blvd. and De Anza Blvd./Stevens Creek Blvd. intersections. The threshold for these intersections is LOS E+ (with no more than 60 seconds of weighted average control delay).
VTA Congestion Management Program (CMP)	LOS E for all CMP intersections.

Source: Fehr & Peers, 2016

## City of Cupertino

Significant impacts at signalized City of Cupertino intersections would occur when the addition of Project traffic causes one of the following:

- Intersection operations to degrade from an acceptable level (LOS D or better) to an unacceptable level (LOS E or F); or
- Exacerbates unacceptable operations (LOS E or F) by increasing the critical delay by more than four seconds and increasing the volume-to-capacity (V/C) ratio by 0.01 or more; or
- An increase in the V/C ratio of 0.01 or more at an intersection with unacceptable operations (LOS E or F) when the change in critical delay is negative (i.e., decreases). This can occur if the critical movements change.

## Congestion Management Program (CMP)

The LOS standard for CMP intersections is LOS E+. Traffic impacts at these intersections would occur when the addition of traffic associated with a Project causes:

- Intersection operations to deteriorate from an acceptable level (LOS E+ or better) to an unacceptable level (LOS F); or
- The V/C ratio increases by 0.01 or more at an intersection with unacceptable operations (LOS E+) when the change in critical delay is negative (i.e., decreases). This can occur if the critical movements change.

## Unsignalized Intersections

Unsignalized study intersections are only located within the City of Cupertino. The City of Cupertino does not have an officially adopted significance criteria for unsignalized intersections. For purposes of this TIA and per the request of City of Cupertino staff, significant impacts are defined to occur when the addition of Project traffic causes the average intersection delay for all-way stop-controlled intersections to degrade to LOS F and the intersection satisfies the peak hour warrant from the California Manual of Uniform Traffic Control Devices (CA MUTCD).

## 1.5.2 FREEWAY SEGMENTS

Caltrans has authority over the State highway system including freeways, interchanges, and arterial State Routes. Caltrans operates and maintains the State Highways in Santa Clara. The *Guide for the Preparation of Traffic Impact Studies* (Caltrans, 2001) includes the information needed for Caltrans to review the impact on State highway facilities, including freeway segments. However, as the Congestion Management Agency, VTA is responsible for monitoring operations on Caltrans facilities within Santa Clara County.

Significant impacts on freeway segments in Santa Clara County are determined according to VTA criteria and would occur when the addition of Project traffic causes under Existing Conditions:

- Freeway segment operations to deteriorate from an acceptable level (LOS E or better) to an unacceptable level (LOS F); or
- An increase in traffic of more than one percent of the capacity of the segments that operate at LOS F.

## 1.6 REPORT ORGANIZATION

The remainder of this report is divided into the following chapters:

- **Chapter 1** describes the study area, analysis scenarios, analysis methods, level of service standards, and impact criteria.
- **Chapter 2** describes the existing transportation system near the Project site and the current operating conditions of the key intersections and freeway segments.
- **Chapter 3** describes the Project traffic estimates which include trip generation, trip distribution, and trip assignment.
- **Chapter 4** describes Existing plus Project Conditions and related Project impacts on the transportation system.
- **Chapter 5** describes Background and Background plus Project Conditions and related Project impacts on the transportation system.
- **Chapter 6** provides an assessment of site access, on-site circulation, multi-modal transportation, and parking.

## 2. EXISTING CONDITIONS

This chapter describes the existing conditions of the surrounding roadway facilities, pedestrian and bicycle facilities, and transit service. It also presents existing traffic volumes and operations for the study intersections and freeway segments with the results of the level of service calculations.

The existing Marina Plaza development is surrounded primarily by low density residential land uses to the north, and retail uses to the west and south along Stevens Creek Boulevard.

### 2.1 EXISTING ROADWAY NETWORK

Interstate 280 (I-280) and State Route 85 (SR-85) provide regional access to the Project site. The following streets provide local access: De Anza Boulevard, Stevens Creek Boulevard, Stelling Road, Mariani Avenue, Lazaneo Drive, Alves Drive and Bandley Drive. Descriptions of these roadways are presented below. **Figure 1-1** shows the locations of these facilities in relation to the Project site.

*I-280* is located immediately north of the Project site and provides regional freeway access between the cities of San Francisco and San Jose. Near the Project site, I-280 is a north-south freeway with three mixed-flow lanes and one high occupancy vehicle (HOV) lane in each direction. HOV lanes, also known as diamond or carpool lanes, restrict use to vehicles with two or more persons (carpools, vanpools, and buses) or motorcycles during the morning (5:00 am to 9:00 am) and evening (3:00 pm to 7:00 pm) commute periods. An extended deceleration lane is provided for the De Anza Boulevard off-ramp from northbound I-280. Access to/from I-280 is provided via its interchanges with De Anza Boulevard and Stevens Creek Boulevard.

*SR-85* is located west of the Project site and extends north through Mountain View to US 101 and south through San Jose to connect again with US 101. The freeway has two mixed-flow lanes and one HOV lane in each direction. Interchanges with I-280, Stevens Creek Boulevard and De Anza Boulevard provide access to the Project site.

*De Anza Boulevard* is a north-south eight-lane divided arterial that connects I-280 with Stevens Creek Boulevard and continues south to Brookvale Chantel, where it becomes Saratoga Sunnyvale Road south of Prospect Road. De Anza Boulevard provides access between the Project and I-280 via the on and off ramps north of the Project site. This roadway connects to the Project site via Alves Drive. There is a Class II bike facility along the roadway on both sides, and the posted speed limit is 40 miles per hour.

*Stevens Creek Boulevard* is an east-west six-lane divided arterial that connects western Cupertino to downtown San Jose (via West San Carlos Street). Stevens Creek Boulevard provides access to SR 85 and I-280 via interchanges. The roadway connects to the Project site via Bandley Drive. There is a Class II bike facility along the roadway on both sides, and the posted speed limit is 35 miles per hour.

*Stelling Road* is a four-lane roadway traveling north-south adjacent to De Anza College. The roadway is divided by a raised median, and offers Class II bike lanes. The posted speed limit is 35 miles per hour.

*Lazaneo Drive* is a two-lane street between Bandley Drive to the west and Vista Drive to the east at which point it becomes Forest Avenue. It provides a connection between residential land uses east of De Anza Boulevard and commercial uses west of De Anza Boulevard. The posted speed limit is 25 miles per hour.

*Mariani Avenue* is a two-lane street between Bandley Drive and De Anza Boulevard, and a four-lane street east of De Anza Boulevard until it terminates at the Apple campus. There are Class II bike lanes west of De Anza Boulevard and the posted speed limit is 25 miles per hour.

*Alves Drive* is a two-lane street that connects De Anza Boulevard to Anton Way to the west. The south side of Alves Drive fronts the Project site. There are no bike facilities on this roadway. The posted speed limit is 25 miles per hour.

*Bandley Drive* is a north-south two-lane roadway that runs from Valley Green Drive south to Stevens Creek Boulevard. Bandley Drive is the western frontage for the Project site south of the Alves Drive / Bandley Drive intersection. There is a Class III bike facility along the roadway, with a posted speed limit of 30 miles per hour.

## 2.2 PEDESTRIAN FACILITIES

Pedestrian connectivity immediately surrounding the Project site is provided by a mostly complete network of sidewalks and crosswalks. Sidewalks are provided along the frontage of the Project site along Alves Drive and Bandley Drive. Pedestrian facilities are displayed in **Figure 2-1**.

All study intersections provide marked crosswalks on at least one approach, and the Bandley Drive/Alves Drive and Bandley Drive/Stevens Creek Boulevard intersections provide crosswalks on all four approaches.

## 2.3 BICYCLE FACILITIES

Bikeway planning and design in California typically relies on guidelines and design standards established by California Department of Transportation (Caltrans) in the *Highway Design Manual* (Chapter 1000: Bikeway Planning and Design and other design documents). Relevant bicycle facilities are described below and **Figure 2-1** displays facilities within ½ mile of the Project site.

- *Class I Bikeway (Bike Path)* provides a completely separate right-of-way and is designated for the exclusive use of bicycles and pedestrians with vehicle and pedestrian cross-flow minimized. In general, bike paths serve corridors not served by streets and highways or where sufficient right-of-way exists to allow such facilities to be constructed away from the influence of parallel streets and vehicle conflicts.




Provides a completely separated right-of-way for the exclusive use of bicycles and pedestrians with cross flow minimized.




- **Class II Bikeways (Bike Lanes)** are lanes for bicyclists generally adjacent to the outer vehicle travel lanes. These lanes have special lane markings, pavement legends, and signage. Bicycle lanes are generally five (5) feet wide. Adjacent vehicle parking and vehicle/pedestrian cross-flow are permitted.

Provides a striped lane for one-way bike travel on a street or highway.

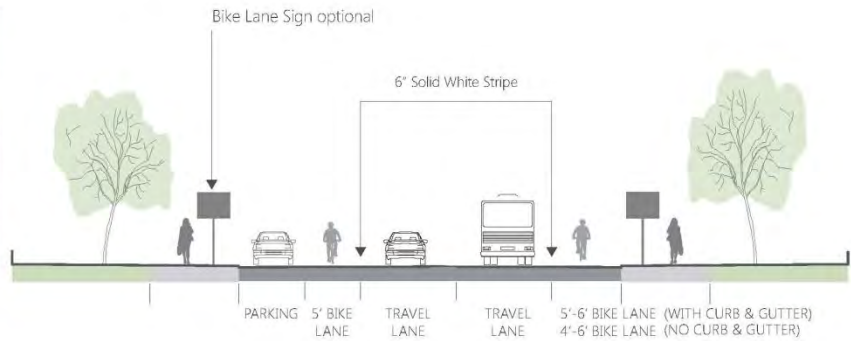


- **Class III Bikeway (Bike Route)** are designated by signs or pavement markings for shared use with pedestrians or motor vehicles, but have no separated bike right-of-way or lane striping. Bike routes serve either to: a) provide continuity to other bicycle facilities, or b) designate preferred routes through high demand corridors.

With Optional Sharrow Pavement Marking  
Provides for shared use with motor vehicle traffic.

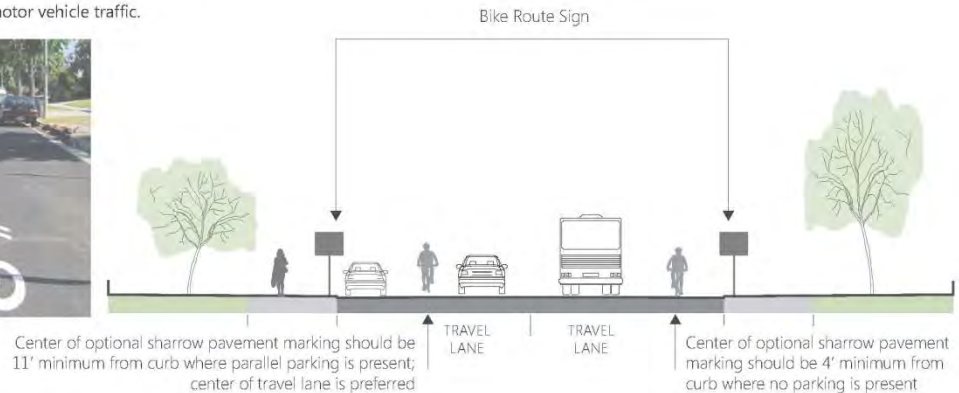



- Class IV Bikeways (Cycle tracks or Protected Bike Lanes) provide a right-of-way designated exclusively for bicycle travel within a roadway and which are protected from other vehicle traffic with devices, including, but not limited to, grade separation, flexible posts, inflexible physical barriers, or parked cars

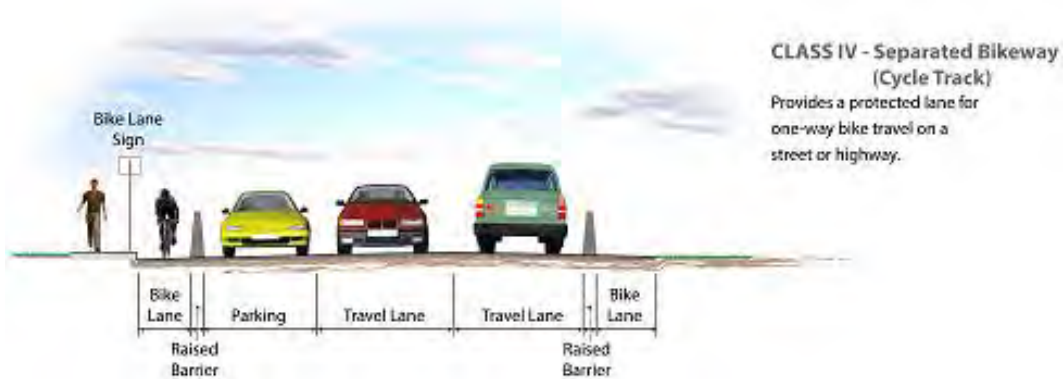


The VTA *Bicycle Technical Guidelines* (December 2007) recommends that Caltrans standards regarding bicycle facility dimension be used as a minimum and provides supplemental information and guidance on when and how to better accommodate the many types of bicyclists.

Near the Project site, bicycle lanes (Class II) are provided on De Anza Boulevard, Mariani Avenue (east of De Anza Boulevard) and Stevens Creek Boulevard.

Class III bike routes exist along Bandle Drive, Lazaneo Drive and Mariani Avenue (west of De Anza Boulevard).

In early 2016, the City of Cupertino adopted its Bicycle Transportation Plan, which illustrates Cupertino's current bicycle network, identifies gaps in the network, and proposes improvement projects to address the identified gaps. The Plan recommends the development of a comprehensive bicycle wayfinding program that offers guidance to key destinations including schools, parks, regional trails, landmarks, and civic buildings, passive detection of bicyclists at all signalized intersections, and bicycle parking to include bicycle racks, bike lockers, bike rooms and secure enclosures. Recommended improvements in the study area include a Class IV separated bike way along Stevens Creek Boulevard, a Class II buffered bike lane along De Anza Boulevard and along Lazaneo Drive west of De Anza Boulevard, and a Class III bike route along Alves Drive from Alton Way to Bandle Drive.

VTA adopted the Santa Clara Countywide Bicycle Plan (CBP) in August 2008. It is currently be updated. The CBP guides the development of major bicycle facilities in the County by identifying Cross County Bicycle Corridors and other bicycle projects of countywide or intercity significance. Several of the Cross County Bicycle Corridors travel through the study area, including routes along N. Stelling Road and Stevens Creek Boulevard.

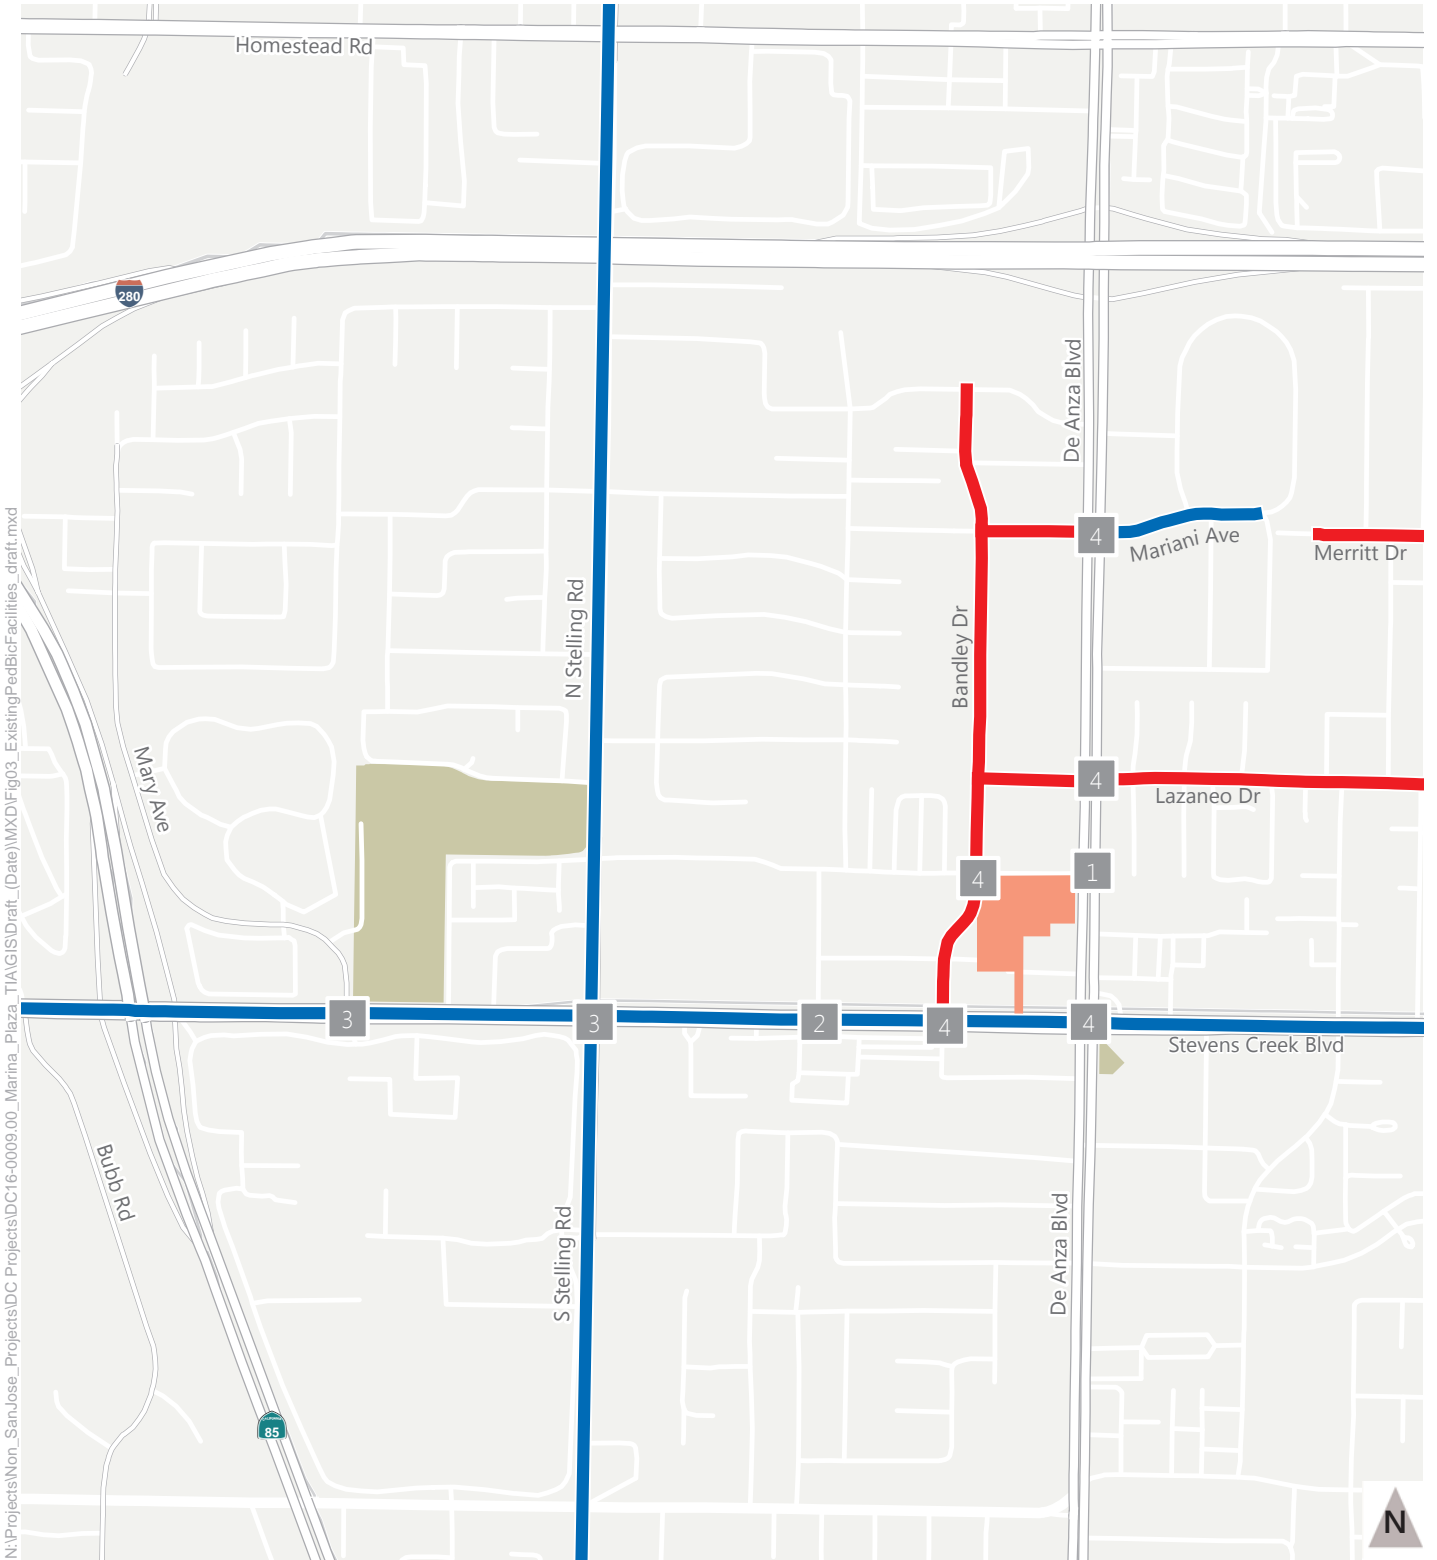

N:\Projects\Non\_SanJose\_Projects\DC16-0009.00\_Marina\_Plaza\_TIA\GIS\Draft\_(Date)\MXD\Fig03\_ExistingPedBicFacilities\_draft.mxd

- Bicycle Facility (Class II)     # Number of Crosswalks at Intersection
- Bicycle Facility (Class III)     Project Site



Figure 2-1  
Existing Pedestrian and Bicycle Facilities

## 2.4 TRANSIT SERVICE

This section summarizes local and regional transit connectivity in the study area, including bus, light rail, commuter rail, and public and private shuttles. The greater San Francisco Bay Area is served by an extensive public transit network of rail, buses, and ferries. Many of these transit providers offer service in the study area, providing regional transit mobility to employees, residents, and visitors in Cupertino. **Figure 2-2: Existing Transit Facilities**

illustrates the existing transit facilities and routes in the study area which include shuttles, buses, light rail, and heavy rail services. Nearby transit services are described below and **Table 2-1** summarizes the destinations, closest stop to the Project site, hours/days of operation, and service frequencies for transit services within a 2,000-foot walking distance of the Project site.

### 2.4.1 VTA BUS SERVICE

*Bus Route 23* provides local bus service between Sunnyvale/Lockheed Martin Transit Center and the Eastridge Transit Center. Route 23 follows major arterials and travels through Sunnyvale, Cupertino, San Jose, and Campbell on Fair Oaks Avenue, Wolfe Road, Campbell Avenue, and Tully Road. Bus stops for Route 23 are provided immediately north of the Project site along Wolfe Road.

*Bus Route 25* provides local bus service between De Anza College and Alum Rock Transit Center via Valley Medical Center. This route operates on Stevens Creek Boulevard, Saich Way, Alves Drive and De Anza Boulevard, with nearby stops at Stevens Creek Boulevard and Saich Way.

*Bus Route 53* provides local bus service between West Valley College and the Sunnyvale Transit Center. This route operates along Stelling Road through Stevens Creek Boulevard, with a nearby stop near the intersection of Stelling Road and Stevens Creek Boulevard.

*Bus Route 54* provides local bus service between De Anza College and the Sunnyvale/Lockheed Martin Transit Center. This route operates along Stelling Road and terminates at Stelling Road and Stevens Creek Boulevard, with connecting bus service provided from routes 25, 53, 55 and 323.

*Bus Route 55* provides local bus service from De Anza College to Great America. This route operates along Stelling Road south of Stevens Creek Boulevard, west on McClellan Road, and north on De Anza Boulevard, with nearby stops at Stelling Road and Stevens Creek Boulevard.

*Bus Route 81* provides local service between San Jose State University and Vallco via the Santa Clara Transit Center and Downtown San Jose. This route operates going east on Stevens Creek Boulevard and north on Stelling Road, with nearby stops at Stelling Road and Stevens Creek Boulevard.

*Bus Route 101* provides express bus service that operates on I-280, Stevens Creek Boulevard, and Lawrence Expressway; it connects a Park & Ride lot at the Camden Avenue interchange along SR 85 to Palo Alto. This route passes through the Winchester Transit Center and has a bus stop east of the Project site at Wolfe Road/Vallco Mall which provides connections to Routes 26, 23, and 323.

*Bus Route 182* provides express bus service that operates on I-280, Wolfe Road, Vallco Parkway, and Stevens Creek Boulevard; it connects the Park & Ride lot at El Camino Real and Page Mill Road in Palo Alto with the IBM Santa Teresa Facility at Bailey Avenue. One Route 182 run departs Palo Alto in the morning. In the evening, one Route 182 run travels northbound. Route 182 has stops at the Vallco shopping plaza, east of the Project site.

*Bus Route 323* provides limited stop bus service between Downtown San Jose and De Anza College. This route operates along Stevens Creek Boulevard from Stelling Road through De Anza Boulevard, with nearby stops at Stelling Road and Stevens Creek Boulevard, and De Anza Boulevard and Stevens Creek Boulevard.

## 2.4.2 COMMUTER RAIL SERVICE

*Caltrain* is a commuter heavy rail service that runs from downtown San Francisco (4<sup>th</sup> and King Streets) to downtown San Jose (Diridon Station), with a limited number of commute period trains running farther south to Gilroy. During commute periods, Caltrain offers express service (“Baby Bullet”) between downtown San Jose and San Francisco, which allows the trip between San Francisco and San Jose to be made in one hour. This service stops at a limited number of stations, including the Mountain View and Sunnyvale stations. Currently, Baby Bullet service is provided both in the northbound and southbound direction during the morning and evening commute periods at the Mountain View Caltrain station. Baby Bullet trains serve the Sunnyvale Caltrain station in the northbound direction during the morning peak and in the southbound direction during the evening peak.

The nearest station to the Project site is the Lawrence Station and is approximately five miles from the Project site. During the weekdays, service in the northbound direction begins at 4:40 AM and ends at 10:40 PM. In the southbound direction, service at this station begins at 6:14 AM and ends at 1:20 AM. During the weekends, northbound service begins at 7:10 AM and ends at 10:40 PM. Southbound service begins at 9:40 AM and ends at 1:26 AM. For passengers arriving by bicycle, there are 18 bike racks and 24 bicycle lockers. Vehicle parking at this location includes 122 parking spaces.


**TABLE 2-1: EXISTING TRANSIT SERVICE**

Route	From	To	Distance to Nearest Stop <sup>1</sup>	Weekdays			Saturdays	
				Average Peak Load Factor <sup>2</sup>	Operating Hours <sup>4</sup>	Peak Headway <sup>3</sup>	Operating Hours <sup>4</sup>	Peak Headway <sup>3</sup>
<b>VTA Bus Service</b>								
25	De Anza College	Alum Rock Transit Center	0.20	N/A	5:52 a – 11:31 p	11	6:46 a – 10:40 p	15
53	West Valley College	Sunnyvale Transit Center	0.50	N/A	6:56 a – 6:56 p	28	No Service	
54	De Anza College	Sunnyvale/Lockheed Martin Transit Center	0.50	N/A	5:37 a – 11:12 p	30	7:58 a – 7:52 p	60
55	De Anza College	Great America	0.30	N/A	5:52 a – 11:31 p	29	7:55 a – 9:11 p	60
81	San Jose State University	Ames Center	0.20	0.07	6:17 a – 8:19 p	30	9:30 a – 4:30 p	60
101	Camden & Highway 85	Palo Alto	1.4	0.23	6:51 a – 7:48 a 4:52 p – 5:55 p	2 NB Runs – AM 2 SB Runs – PM	No Service	
182	Palo Alto	IBM/Bailey Avenue	1.4	0.07	7:27 a – 8:34 a 5:05 p – 6:14 p	1 SB Run – AM 1 NB Run – PM	No Service	
323	Downtown San Jose	De Anza College	0.2	N/A	7:02 a – 10:53 p	151	8:03 a – 10:26 p	20
<b>Commuter Rail Service</b>								
Caltrain	San Francisco	San Jose Diridon	3.00	N/A	4:40 a – 1:20 a	30 (local) / 15 (express)	7:10 a – 1:26 a	60

Notes:

1. Approximate distance in miles from nearest stop to Marina Plaza driveway.
2. Average peak load factor is the ratio of the average peak number of on-board passengers aboard during the peak period to supply of seats.
3. Headways are defined as the time interval between two transit vehicles traveling in the same direction over the same route.
4. Operating hours consider earliest and latest stop at each bus lines closest stop to the Marina Plaza.
5. AM = morning commuter period; PM = evening commute period

Source: VTA, March 2016.

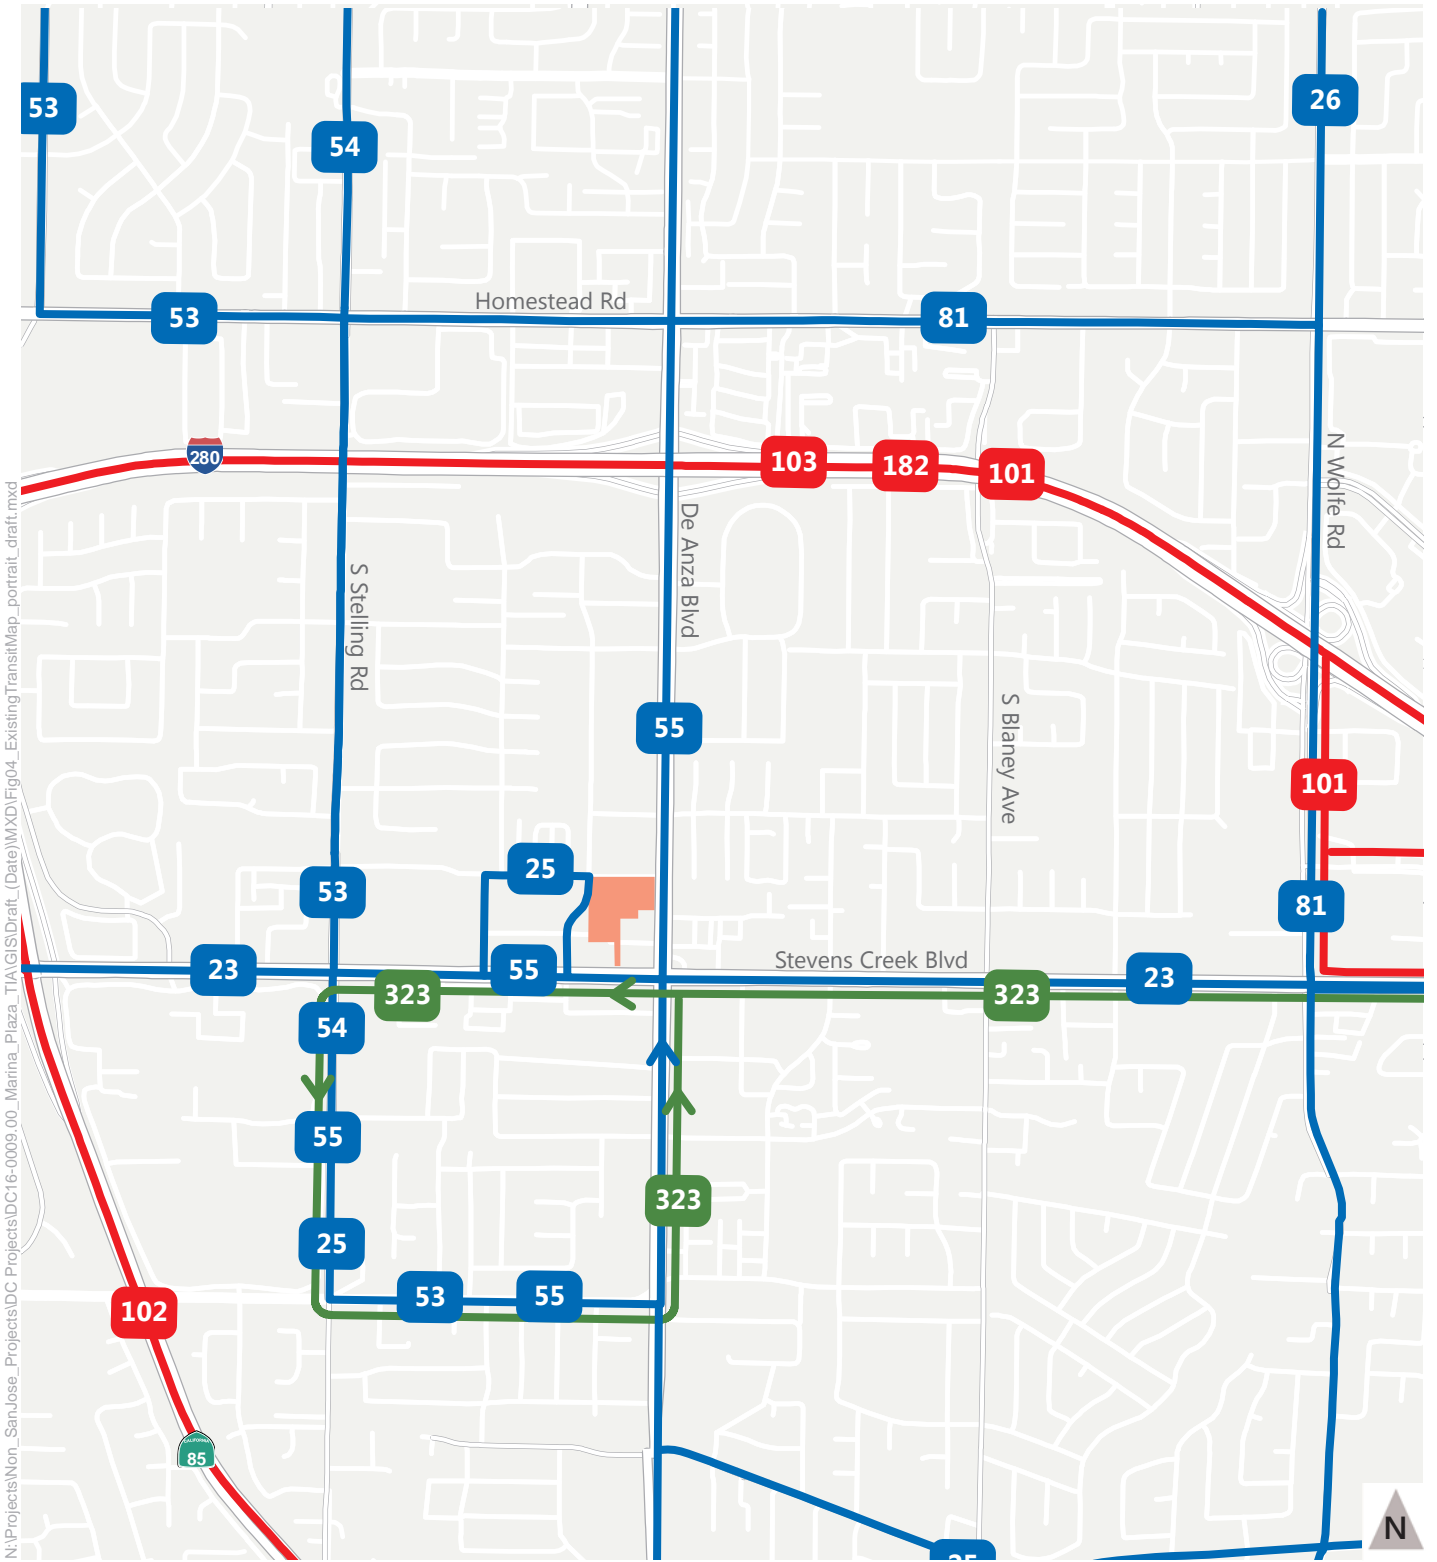

— Express Bus — Limited Stop — Local Bus Study Area



Figure 2-2  
Existing Transit Facilities

## 2.5 EXISTING INTERSECTION VOLUMES AND LANE CONFIGURATIONS

The existing operations of the study intersections were evaluated with the highest one-hour volumes during the weekday morning and evening peak periods. In general, AM and PM peak period intersection turning movement counts were conducted in March 2016, with the exception of De Anza Boulevard/Stevens Creek Boulevard and Stelling Road/Stevens Creek Boulevard intersections which were collected in April 2015. **Figure 2-3** presents the existing AM and PM peak-hour turning movement volumes, lane configurations, and traffic control devices at the study intersections. **Appendix A** contains the traffic count data.

## 2.6 EXISTING INTERSECTION LEVEL OF SERVICE

Existing lane configurations, signal timings, and peak-hour turning movement volumes were used to calculate the levels of service for the key intersections during each peak hour. The results of the LOS analysis using the TRAFFIX software program for Existing Conditions are presented in **Table 2-2**. **Appendix B** contains the corresponding calculation sheets. The results indicate that all study intersections operate at acceptable service levels (LOS D or better for City intersections and LOS E+ or better for regionally significant and CMP intersections) during the AM and PM peak hours.

**TABLE 2-2: EXISTING INTERSECTION LEVEL OF SERVICE RESULTS**


ID #	Intersection	Control Type	Jurisdiction / CMP <sup>1</sup>	LOS Threshold	Peak Hour <sup>2</sup>	Delay <sup>3</sup>	LOS <sup>4</sup>
1	De Anza Boulevard and Mariani Avenue	Signal	Cupertino	D	AM PM	36.4 42.2	D D
2	De Anza Boulevard and Lazaneo Drive	Signal	Cupertino	D	AM PM	17.5 19.8	B B
3	Bandley Drive and Alves Drive	SSSC	Cupertino	D	AM PM	10.6 11.3	B B
4	De Anza Boulevard and Alves Drive	SSSC	Cupertino	D	AM PM	11.0 20.3	B C
5	Mary Avenue and Stevens Creek Boulevard	Signal	Cupertino	D	AM PM	34.0 33.3	C C
6	N. Stelling Road and Stevens Creek Boulevard	Signal	Cupertino/CMP	E+	AM PM	43.1 39.2	D D
7	Saich Way and Stevens Creek Boulevard	Signal	Cupertino	D	AM PM	15.7 21.7	B A
8	Bandley Drive and Stevens Creek Boulevard	Signal	Cupertino	D	AM PM	15.0 24.5	B C
9	De Anza Boulevard and Stevens Creek Boulevard	Signal	Cupertino/CMP	E+	AM PM	37.6 53.8	D D

Notes:

1. Intersection jurisdiction and identification of CMP (Congestion Management Program) intersections.
2. AM = morning peak hour, PM = evening peak hour.
3. Whole intersection weighted average control delay expressed in seconds per vehicle calculated using methods described in the 2000 *Highway Capacity Manual*, with adjusted saturation flow rates to reflect Santa Clara County Conditions for signalized intersections.
4. LOS = Level of Service. LOS calculations conducted using the TRAFFIX analysis software packages, which apply the methods described in the 2000 *Highway Capacity Manual*.
5. Signal = Signalized intersection, SSSC = Side-street stop controlled intersection

Source: Fehr & Peers, 2016.



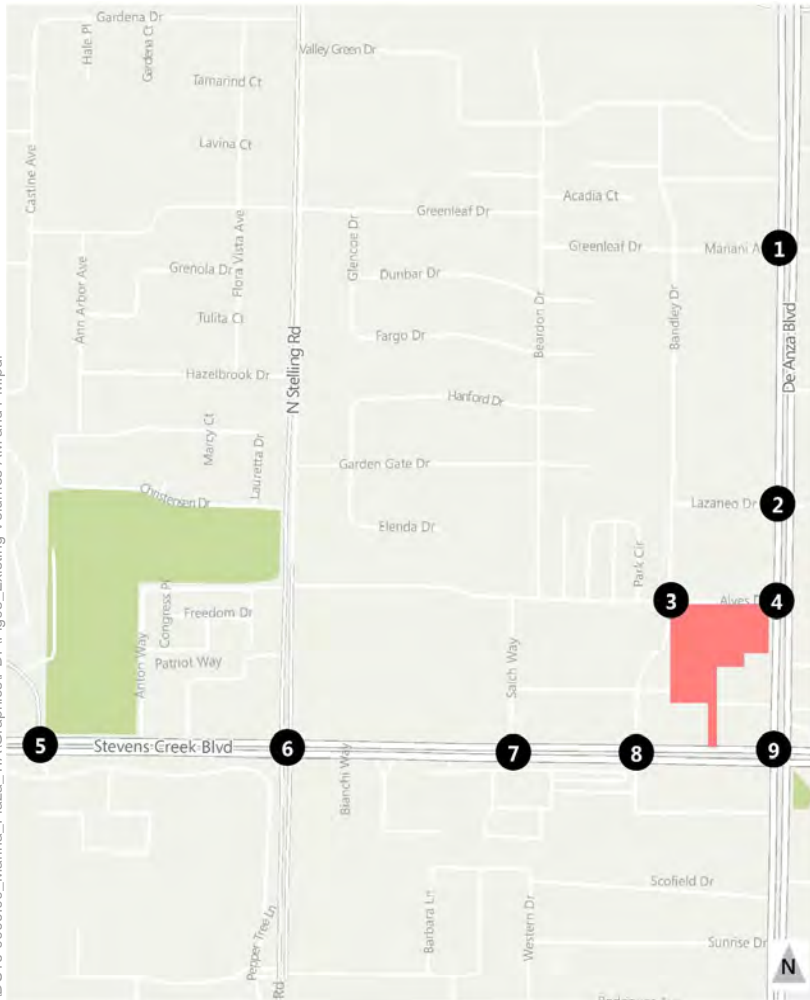

1. De Anza Blvd/Mariani Ave	2. De Anza Blvd/Lazaneo Dr	3. Bandlew Dr/Alves Dr
<p>De Anza Blvd</p> <p>Mariani Ave</p> <p>97 (71) 995 (2,134) 684 (229)</p> <p>85 (260) 60 (44) 72 (323)</p> <p>186 (406) 233 (90) 22 (50)</p> <p>61 (100) 1,867 (1,479) 201 (52)</p>	<p>De Anza Blvd</p> <p>Lazaneo Dr</p> <p>89 (62) 1,017 (2,408) 91 (62)</p> <p>146 (64) 44 (28) 58 (38)</p> <p>63 (159) 27 (48) 22 (197)</p> <p>86 (60) 2,198 (1,202) 64 (57)</p>	<p>Bandlew Dr</p> <p>Alves Dr</p> <p>64 (91) 65 (122) 7 (35)</p> <p>20 (34) 53 (81) 7 (26)</p> <p>146 (120) 64 (69) 27 (47)</p> <p>38 (65) 210 (175) 4 (17)</p>
4. De Anza Blvd/Alves Dr	5. Mary Ave/Stevens Creek Blvd	6. N. Stelling Rd/Stevens Creek Blvd
<p>De Anza Blvd</p> <p>Alves Dr</p> <p>72 (152) 1,053 (2,575)</p> <p>86 (127)</p> <p>2,315 (1,350)</p>	<p>Mary Ave</p> <p>Stevens Creek Blvd</p> <p>221 (151) 28 (53) 97 (166)</p> <p>164 (117) 865 (931) 196 (102)</p> <p>115 (210) 662 (1,406) 140 (94)</p> <p>64 (152) 10 (15) 25 (56)</p>	<p>N. Stelling Rd</p> <p>Stevens Creek Blvd</p> <p>167 (174) 249 (564) 149 (303)</p> <p>148 (141) 753 (905) 277 (351)</p> <p>281 (318) 554 (1,259) 122 (259)</p> <p>267 (169) 634 (344) 119 (180)</p>
7. Saich Way/Stevens Creek Blvd	8. Bandlew Dr/Stevens Creek Blvd	9. De Anza Blvd/Stevens Creek Blvd
<p>Saich Way</p> <p>Stevens Creek Blvd</p> <p>98 (186) 41 (132)</p> <p>57 (43) 1,202 (1,104)</p> <p>145 (204) 628 (1,477)</p>	<p>Bandlew Dr</p> <p>Stevens Creek Blvd</p> <p>42 (124) 13 (27) 32 (127)</p> <p>185 (108) 1,220 (979) 37 (124)</p> <p>64 (133) 552 (1,437) 47 (65)</p> <p>74 (82) 12 (23) 15 (53)</p>	<p>De Anza Blvd</p> <p>Stevens Creek Blvd</p> <p>226 (289) 574 (1,844) 404 (521)</p> <p>323 (270) 723 (636) 248 (382)</p> <p>189 (208) 379 (985) 114 (440)</p> <p>564 (470) 1,728 (825) 195 (277)</p>

- XX(Y) AM(PM) Peak Hour Traffic Volumes
- Signalized Intersection
- Stop-controlled Intersection
- Project Site
- Study Intersection



Figure 2-3  
Existing Peak Hour Traffic Volumes  
and Lane Configurations

## 2.7 EXISTING FREEWAY SEGMENT LEVEL OF SERVICE

For freeway segments, Existing Conditions are defined as existing volumes and geometry as stated in the *2014 VTA Monitoring and Conformance Report*. **Table 2-3** contains the existing freeway segment levels of service for the mixed-flow and HOV lanes based on the segment densities. During the AM peak hour, the northbound HOV and mixed-flow freeway segments on SR 85 from Saratoga-Sunnyvale Road to I-280 exceed the VTA's LOS E standard and operate at LOS F. The mixed-flow lanes on the westbound segments on I-280 from Wolfe Road to SR 85 also operate at LOS F during the AM peak hour. During the PM peak hour the HOV lane on the southbound segment of SR 85 between I-280 and Steven Creek Boulevard and the mixed-flow lanes on the southbound segment of SR 85 between Stevens Creek Boulevard and Saratoga-Sunnyvale Road operate at LOS F. The mixed-flow lanes on the eastbound segments on I-280 from SR 85 to Wolfe Road also operate at LOS F during the PM peak hour.

**TABLE 2-3: EXISTING FREEWAY LEVEL OF SERVICE RESULTS**

Freeway Segment	Peak Hour	Number of Lanes		Density		LOS	
		Mixed	HOV	Mixed	HOV	Mixed	HOV
<b>SR 85 Northbound</b>							
Saratoga-Sunnyvale Rd to Stevens Creek Blvd	AM	2	1	65	64	<b>F</b>	<b>F</b>
	PM	2	1	22	9	C	A
Stevens Creek Blvd to I-280	AM	2	1	124	108	<b>F</b>	<b>F</b>
	PM	2	1	13	6	B	A
<b>SR 85 Southbound</b>							
I-280 to Stevens Creek Blvd	AM	2	1	21	5	C	A
	PM	2	1	52	66	E	<b>F</b>
Stevens Creek Blvd to Saratoga-Sunnyvale Rd	AM	2	1	18	5	B	A
	PM	2	1	90	47	<b>F</b>	E
<b>I-280 Eastbound</b>							
SR-85 to De Anza Blvd	AM	3	1	24	9	C	A
	PM	3	1	103	19	<b>F</b>	E
De Anza Blvd to Wolfe Rd	AM	3	1	36	10	D	A
	PM	3	1	77	30	<b>F</b>	E
<b>I-280 Westbound</b>							
Wolfe Rd to De Anza Blvd	AM	3	1	62	57	<b>F</b>	E
	PM	3	1	25	7	C	A
De Anza Blvd to SR-85	AM	3	1	73	45	<b>F</b>	D
	PM	3	1	23	7	C	A

Notes: **Bold text** indicates intersection operates at unacceptable level of service.

Source: VTA Monitoring and Conformance Report, 2014; Fehr & Peers, 2016

### 3. PROJECT TRAFFIC ESTIMATES

The amount of traffic added to the roadway system by the proposed Project is estimated using a three-step process: (1) trip generation, (2) trip distribution, and (3) trip assignment. The first step estimates the amount of traffic added to the roadway network. The second estimates the direction of travel to and from the Project site. The new vehicle trips are assigned to specific street segments and intersection turning movements during the third step. The results of the process for the Project are described in the following sections.

#### 3.1 TRIP GENERATION

The trip generation estimates were developed using rates from the Institute of Transportation Engineers (ITE) rates published in *Trip Generation Manual* (9<sup>th</sup> Edition) and Fehr & Peers MainStreet to account for the mixed-use nature of both the existing and proposed uses. MainStreet incorporates MXD+, a method developed by Fehr & Peers for the US EPA and continuously refined through consulting for other state, regional and local clients. It is based on pooled household survey data for 239 mixed-use developments (MXDs) in six diverse US regions, statistically derived equations on internal trip capture and mode shares, and validated at 27 existing MXD sites across the US, and peer reviewed. The MXD+ tool accurately estimates trip generation by accounting for the smart growth characteristics of projects.

##### 3.1.1 MAINSTREET MIXED-USE TRIP GENERATION

Methods commonly used by traffic engineers overestimate the impacts of infill and mixed-use developments (MXDs) because they do not accurately reflect the amount of internal trip linking or the level of trips made by transit, biking, and/or walking. This may result in oversized infrastructure, skewed public perception, and resistance to approving infill, mixed-use, and transit-oriented development. The Institute of Transportation Engineers (ITE) *Trip Generation Handbook* provides a methodology to account for mixed uses, but this resource does not adequately account for key variables that influence travel such as development density and scale, location efficiency, land use mix, urban design, and transit orientation. As part of a recent validation effort, 27 mixed-use sites were surveyed and the results showed the ITE Handbook methodology overestimated daily traffic generation by approximately 24 percent and peak hour traffic by up to 37 percent.

MainStreet recognizes that traffic generation by mixed-use and other forms of sustainable development relate closely to the density, diversity, design, destination accessibility, transit proximity, and scale of development. The MainStreet method explains 97 percent of the variation in trip generation among mixed-use developments, compared to 65 percent for the methods previously recommended by ITE. While remaining slightly conservative (two to four percent) to avoid systematically understating impacts, it substantially reduces the overestimation of traffic generation produced by conventional ITE methods.

MainStreet improves the accuracy of impact estimation and gives planners a tool to rationally balance land use mix and to incorporate urban design, context compatibility, and transit orientation to create lower impact development. MainStreet has been approved for use by the EPA<sup>1</sup>, peer-reviewed in the *ASCE Journal of Urban Planning and Development*<sup>2</sup>, peer-reviewed in a 2012 Transportation Research Board (TRB) paper evaluating various smart growth trip generation methodologies<sup>3</sup>, recommended by SANDAG for use on mixed-use smart growth developments<sup>4</sup>, and has been used successfully in multiple certified Environmental Impact Reports in California. Further explanation regarding the MainStreet tool can be found in **Appendix C**.

In the case of this project, the MainStreet tool was used to evaluate the MXD reductions for both the existing and proposed land uses to accurately estimate the net new Project trip generation. The existing land uses are mostly retail and not very diverse. The associated MXD reductions are 9 percent for daily trips, 15 percent for morning peak hour trips, and 16 percent for evening peak hour trips. Based on the MainStreet model, the proposed uses would have an MXD reduction of 11 percent for daily trips, 18 percent for morning peak hour trips, and 25 percent for evening peak hour trips. These MXD reductions account for the mix of uses within the Project and its location in proximity to the surrounding residential and employment land uses, transit accessibility (including VTA buses on Steven Creek Boulevard and shuttle access), and bike/pedestrian access. The difference in reductions between existing and proposed land uses is due to the mix of residential, retail, and hotel land uses proposed which maximizes the internal trip captures between land uses, as opposed to the mostly retail land uses currently at the site.

### 3.1.2 PASS-BY AND DIVERTED TRIP REDUCTIONS

Pass-by trips are trips that are attracted from the traffic volumes on roads adjacent to the commercial/shopping center land uses and do not require a diversion from the current travel path to gain access to the site. Diverted trips are similar to pass-by trips but require a route deviation to gain access to the site. Pass-by and diverted trip reductions can often be applied to commercial/shopping center uses. However, we do not propose to apply any pass-by trip reductions for several reasons:

- i. Most of the trips would likely be diverted trips from the freeways, and would have negligible effect on the operations of the study intersections.

---

<sup>1</sup> Trip Generation Tool for Mixed-Use Developments (2012). [www.epa.gov/dced/mxd\\_tripgeneration.html](http://www.epa.gov/dced/mxd_tripgeneration.html)

<sup>2</sup> "Traffic Generated by Mixed-Use Developments—Six-Region Study Using Consistent Built Environmental Measures." *Journal of Urban Planning and Development*, 137(3), 248–261.

<sup>3</sup> Shafizadeh, Kevan et al. "Evaluation of the Operation and Accuracy of Available Smart Growth Trip Generation Methodologies for Use in California". Presented at 91st Annual Meeting of the Transportation Research Board, Washington, D.C., 2012.

<sup>4</sup> SANDAG Smart Growth Trip Generation and Parking Study. <http://www.sandag.org/index.asp?projectid=378&fuseaction=projects.detail>

- ii. The existing uses also include a level of pass-by trips, thus the total number of actual new pass-by trips would be relatively low and have a negligible effect on the intersection operations.

### 3.1.3 TRIP ESTIMATES

As outlined above, trip generation estimates were determined using ITE's rates and MainStreet reductions. The existing trip estimates were subtracted from the Project trips to develop net new Project trips. The Marina Plaza vehicle trip generation estimates are presented in **Table 3-1**.

**TABLE 3-1: VEHICLE TRIP GENERATION ESTIMATES**

ITE Category	ITE Land Use		ITE Code	Size	Units	Daily	AM Peak Hour			PM Peak Hour		
							In	Out	Total	In	Out	Total
<b>Existing Land Uses</b>												
Retail	Variety Store		814	1.24	KSF	79	3	2	5	4	4	8
Retail	Supermarket		850	34	KSF	3,476	72	44	116	164	158	322
Office	Medical-Dental		720	1.95	KSF	70	4	1	5	2	5	7
Restaurant	High-Turnover Restaurant		932	11.5	KSF	1,467	69	56	125	68	46	114
Total Existing Trips						5,092	148	103	251	238	213	451
Existing MainStreet Trip Reduction						-459	-23	-16	-38	-39	-35	-73
<b>Net Existing External Vehicle Trips</b>						<b>4,633</b>	<b>125</b>	<b>87</b>	<b>213</b>	<b>199</b>	<b>178</b>	<b>378</b>
<b>Proposed Land Uses</b>												
Hotel	Hotel	310	122	Rooms		997	38	27	65	37	36	73
Residential	Apartment		220	188	DU	1,263	19	77	96	79	42	121
Retail	Shopping Center		820	10.8	KSF	462	6	4	10	19	21	40
Restaurant	Fast Food w/o Drive-Thru		933	2.8	KSF	1,983	73	49	122	37	35	72
Restaurant	High-Turnover Restaurant		932	9.0	KSF	1,144	53	44	97	53	36	89
Proposed Total Trips						5,849	189	201	391	225	170	395
Proposed MainStreet Trip Reduction						-644	-35	-37	-71	-57	-43	-99
<b>Net Proposed External Vehicle Trips</b>						<b>5,205</b>	<b>154</b>	<b>164</b>	<b>320</b>	<b>168</b>	<b>127</b>	<b>296</b>
<b>Net New Project Trips</b>						<b>572</b>	<b>29</b>	<b>77</b>	<b>107</b>	<b>-31</b>	<b>-51</b>	<b>-82</b>


Source: ITE Trip Generation Manual, 9<sup>th</sup> edition, 2012; Fehr & Peers, March 2016

## 3.2 TRIP DISTRIBUTION AND TRIP ASSIGNMENT

The distribution of the traffic generated by the Project onto the roadway system was based on the locations of complementary land uses, prevailing travel patterns, surrounding population densities, and recent TIAs completed in the area. Input from the City of Cupertino staff was used to refine the trip distribution patterns. The trip distribution pattern is shown in **Figure 3-1**.

Project trips were assigned to the roadway network based on the trip distribution patterns discussed above. **Figure 3-2** shows the AM and PM peak hour Project trips assigned to each turning movement at the study intersections.





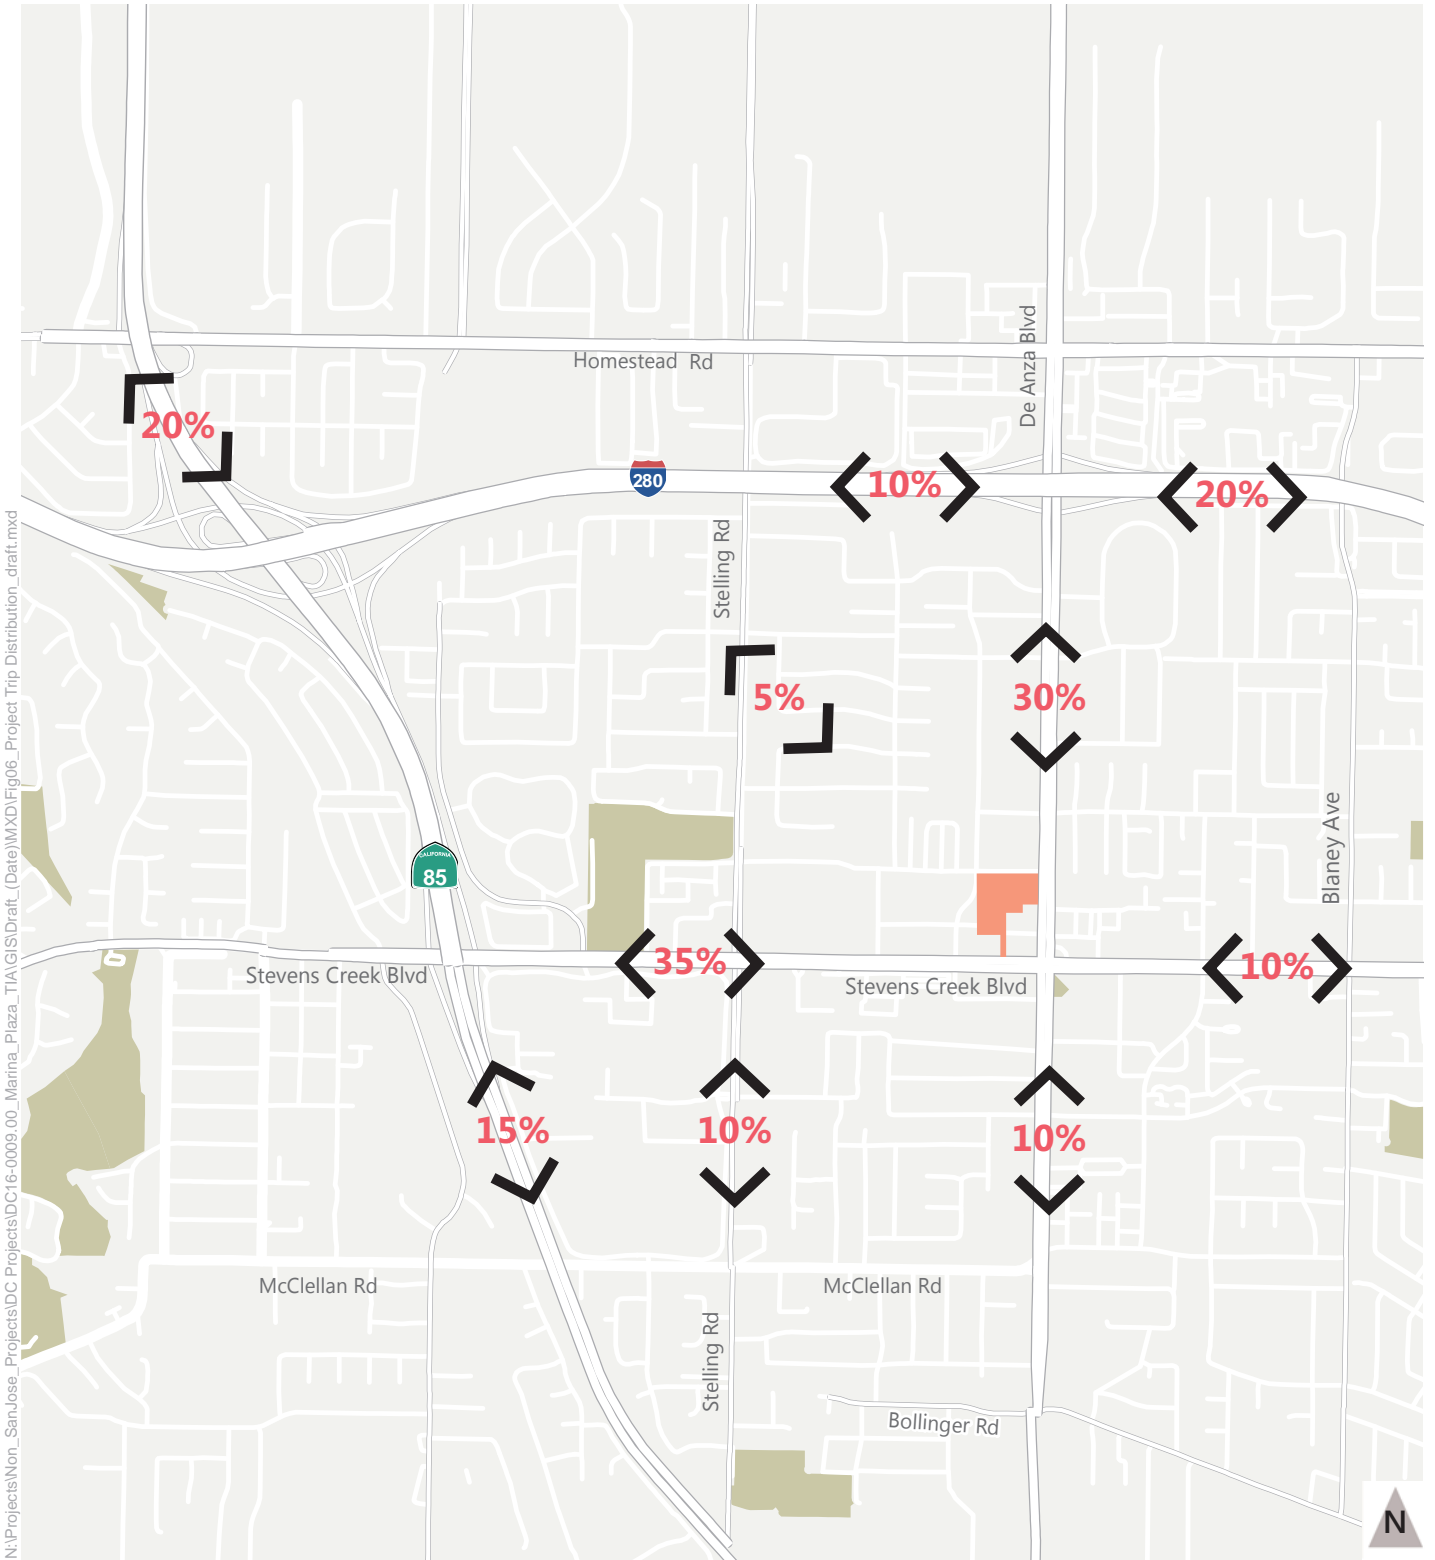

■ Project Site
 
{ X } Distribution Center Trip Distribution



Figure 3-1  
Project Trip Distribution

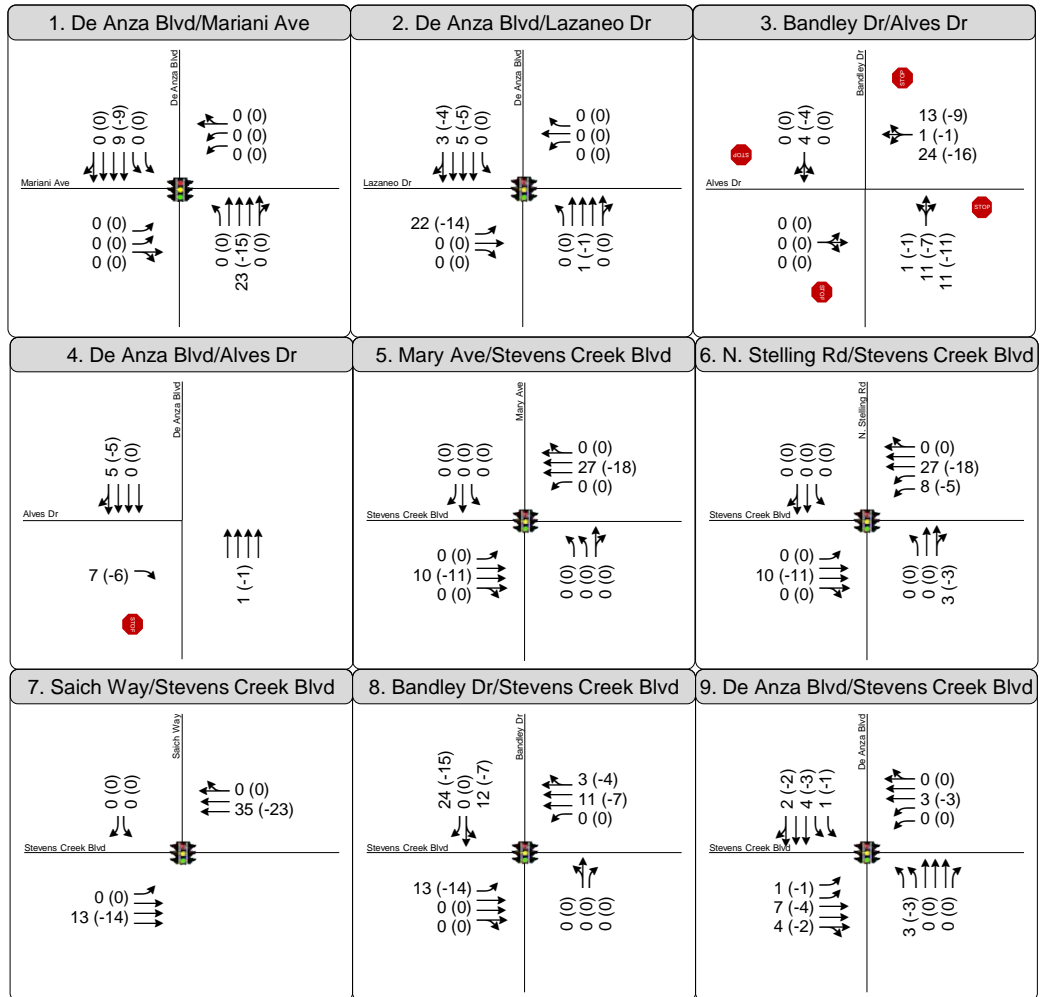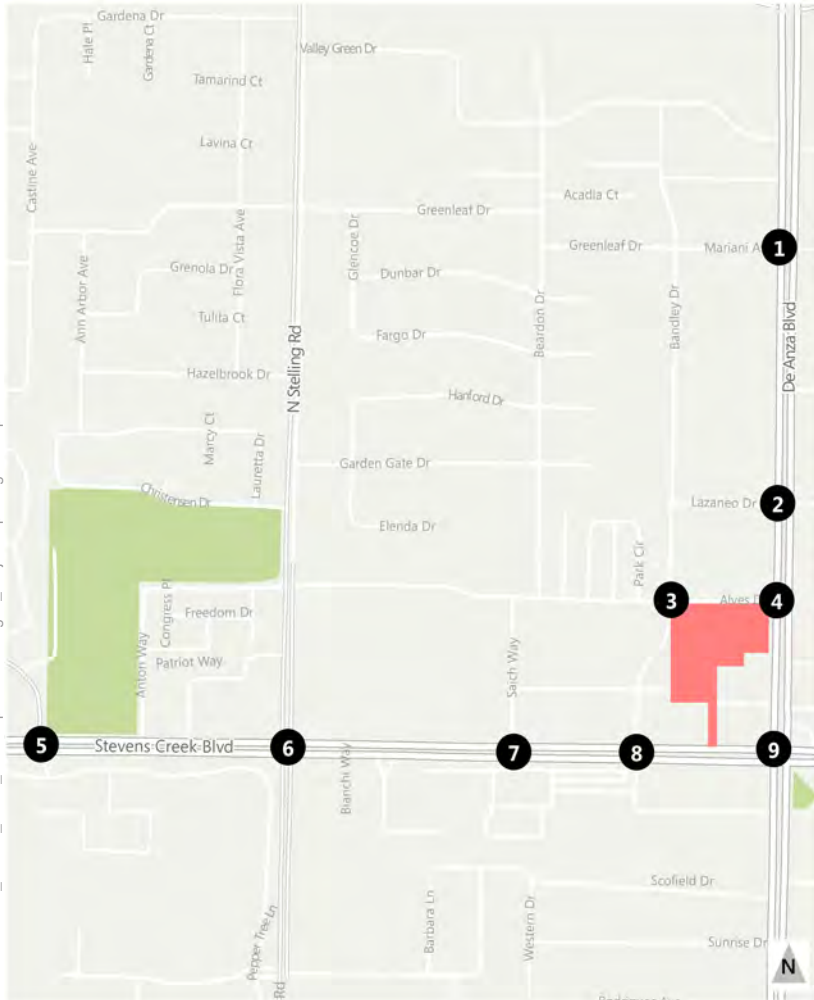

XX(YY) AM(PM) Peak Hour Traffic Volumes



Signalized Intersection



Stop-controlled Intersection

Project Site



Study Intersection



Figure 3-2  
Project Trip Assignment

## 4. EXISTING PLUS PROJECT CONDITIONS

This section presents the operations of the surrounding transportation system under Existing plus Project Conditions. Existing plus Project Conditions are defined as Existing Conditions with build-out of the Project. The peak hour vehicle trip estimates to and from the Project site are based on the trip estimates discussed in **Chapter 3: Project Traffic Estimates**. Potential impacts to the roadway system under this scenario are identified by comparing the level of service results under Existing plus Project Conditions to those under Existing Conditions without the Project.


### 4.1 EXISTING PLUS PROJECT VOLUMES

Trips generated from the proposed Project were added to the existing traffic to develop traffic volumes for the Existing plus Project Conditions. The resulting volumes are shown on **Figure 4-1**.

### 4.2 EXISTING PLUS PROJECT INTERSECTION LEVEL OF SERVICE

Intersection levels of service were calculated with the new traffic added by the Project to evaluate the operating conditions of the intersections and identify potential impacts to the roadway system. The results of the intersection level of service calculations for Existing plus Project Conditions are presented in **Table 4-1**. **Appendix B** contains the corresponding calculation sheets. The results for Existing Conditions are included for comparison purpose, along with the projected increases in critical delay and critical volume-to-capacity (V/C) ratios. Critical delay represents the delay associated with the critical movements of the intersection, or the movements that require the most "green time" and have the greatest effect on overall intersection operations. The changes in critical delay and critical V/C ratio between Existing and Existing plus Project Conditions are used to identify significant impacts.

The results of the LOS calculations indicate that all study intersections operate at acceptable service levels (LOS D or better for City intersections and LOS E+ or better for regionally significant) during the AM and PM peak hours under Existing plus Project Conditions.

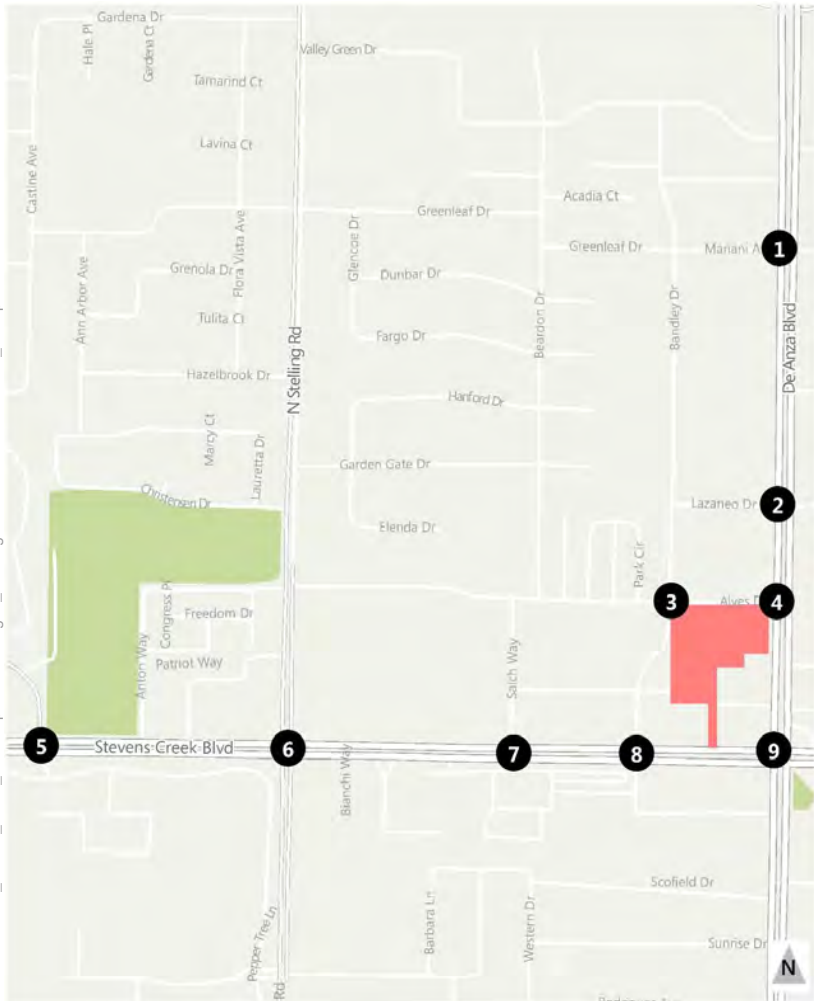

<p><b>1. De Anza Blvd/Mariani Ave</b></p> <p>De Anza Blvd</p> <p>Mariani Ave</p> <p>99 (76) 1,029 (2,263) 701 (244)</p> <p>87 (277) 61 (47) 74 (344)</p> <p>191 (432) 239 (96) 23 (53)</p> <p>62 (106) 1,936 (1,559) 206 (65)</p>	<p><b>2. De Anza Blvd/Lazaneo Dr</b></p> <p>De Anza Blvd</p> <p>Lazaneo Dr</p> <p>99 (61) 1,094 (2,546) 97 (66)</p> <p>156 (68) 47 (30) 62 (40)</p> <p>91 (154) 29 (51) 24 (209)</p> <p>92 (64) 2,354 (1,272) 69 (60)</p>	<p><b>3. Bandlely Dr/Alves Dr</b></p> <p>Bandlely Dr</p> <p>Alves Dr</p> <p>72 (94) 78 (123) 8 (36)</p> <p>37 (26) 61 (83) 35 (10)</p> <p>164 (125) 72 (72) 30 (49)</p> <p>44 (66) 248 (174) 17 (6)</p>
<p><b>4. De Anza Blvd/Alves Dr</b></p> <p>De Anza Blvd</p> <p>Alves Dr</p> <p>80 (151) 1,099 (2,646)</p> <p>97 (124)</p> <p>2,418 (1,386)</p>	<p><b>5. Mary Ave/Stevens Creek Blvd</b></p> <p>Mary Ave</p> <p>Stevens Creek Blvd</p> <p>244 (157) 31 (55) 107 (172)</p> <p>181 (121) 986 (948) 217 (106)</p> <p>127 (218) 743 (1,449) 155 (98)</p> <p>71 (158) 11 (16) 28 (58)</p>	<p><b>6. N. Stelling Rd/Stevens Creek Blvd</b></p> <p>N. Stelling Rd</p> <p>Stevens Creek Blvd</p> <p>181 (180) 270 (582) 162 (313)</p> <p>161 (146) 846 (915) 309 (357)</p> <p>305 (328) 612 (1,288) 132 (267)</p> <p>290 (174) 688 (355) 132 (183)</p>
<p><b>7. Saich Way/Stevens Creek Blvd</b></p> <p>Saich Way</p> <p>Stevens Creek Blvd</p> <p>107 (200) 45 (142)</p> <p>62 (46) 1,349 (1,161)</p> <p>158 (219) 699 (1,571)</p>	<p><b>8. Bandlely Dr/Stevens Creek Blvd</b></p> <p>Bandlely Dr</p> <p>Stevens Creek Blvd</p> <p>70 (113) 14 (28) 47 (125)</p> <p>199 (108) 1,304 (1,010) 39 (129)</p> <p>82 (124) 585 (1,494) 50 (68)</p> <p>78 (85) 13 (24) 16 (55)</p>	<p><b>9. De Anza Blvd/Stevens Creek Blvd</b></p> <p>De Anza Blvd</p> <p>Stevens Creek Blvd</p> <p>239 (292) 607 (1,873) 425 (529)</p> <p>339 (275) 763 (644) 261 (389)</p> <p>200 (211) 405 (998) 124 (446)</p> <p>596 (475) 1,815 (839) 205 (282)</p>

- XX(Y) AM(PM) Peak Hour Traffic Volumes
- Signalized Intersection
- Stop-controlled Intersection
- Project Site
- Study Intersection



Figure 4-1  
Existing Plus Project Peak Hour Traffic Volumes  
and Lane Configurations

**TABLE 4-1: EXISTING PLUS PROJECT INTERSECTION LEVEL OF SERVICE RESULTS**

ID	Intersection	Control Type	Jurisdiction / CMP	LOS Threshold <sup>1</sup>	Peak Hour <sup>2</sup>	Existing		Existing plus Project			
						Delay <sup>3</sup>	LOS <sup>4</sup>	Delay <sup>3</sup>	LOS <sup>4</sup>	Δ in Crit. V/C <sup>5</sup>	Δ in Crit. Delay <sup>6</sup>
1	De Anza Boulevard and Mariani Avenue	Signal	Cupertino	D	AM	36.4	D	36.3	D	0.003	0.0
						42.2	D	42.3	D	0.001	0.0
2	De Anza Boulevard and Lazaneo Drive	Signal	Cupertino	D	AM	17.5	B	17.6	B	0.000	0.0
						19.8	B	19.7	B	0.001	-0.0
3	Bandlely Drive and Alves Drive	SSSC	Cupertino	D	AM	10.6	B	11.2	B	0.050	0.6
						11.3	B	10.9	B	0.033	-0.4
4	De Anza Boulevard and Alves Drive	SSSC	Cupertino	D	AM	11.0	B	17.7	B	0.011	0.0
						20.3	C	17.6	B	0.018	0.0
5	Mary Avenue and Stevens Creek Boulevard	Signal	Cupertino	D	AM	34.0	C	33.9	C	0.002	-0.1
						33.3	C	33.4	C	0.002	0.1
6	N. Stelling Road and Stevens Creek Boulevard	Signal	Cupertino/CMP	E+	AM	43.1	D	43.1	D	0.006	-0.1
						39.2	D	39.1	D	0.005	-0.2
7	Saich Way and Stevens Creek Boulevard	Signal	Cupertino	D	AM	15.7	B	15.5	B	0.007	-0.3
						21.7	A	21.8	C	0.005	0.2
8	Bandlely Drive and Stevens Creek Boulevard	Signal	Cupertino	D	AM	15.0	B	16.1	B	0.011	0.9
						24.5	C	23.6	C	0.004	-0.4
9	De Anza Boulevard and Stevens Creek Boulevard	Signal	Cupertino/CMP	E+	AM	37.6	D	37.7	D	0.001	0.1
						53.8	D	53.3	D	0.003	-0.8

Notes:

1. LOS Threshold is the lowest acceptable LOS (the threshold between acceptable and unacceptable level of service).
2. AM = morning peak hour, PM = evening peak hour.
3. Whole intersection weighted average control delay expressed in seconds per vehicle calculated using methods described in the 2000 *Highway Capacity Manual*, with adjusted saturation flow rates to reflect Santa Clara County Conditions for signalized intersections.
4. LOS = Level of Service. LOS calculations conducted using the TRAFFIX analysis software packages, which apply the methods described in the 2000 *Highway Capacity Manual*.
5. Change in critical volume to capacity ratio between Existing and Existing plus Project Conditions
6. Change in average critical movement delay between Existing and Existing plus Project Conditions.
7. Signal = Signalized intersection, SSSC = Side-street stop controlled intersection

Source: Fehr & Peers, 2016.

### 4.3 EXISTING PLUS PROJECT INTERSECTION IMPACTS AND MITIGATION MEASURES

This section of the report evaluates the intersection LOS results presented in **Table 4-1** against the impact criteria discussed in Chapter 2.5 and presents mitigation measures for identified impacts. Based on the identified appropriate impact criteria, the Project has **less-than-significant** impact at all study intersections under the Existing plus Project scenario and no mitigation measures are required.

### 4.4 EXISTING PLUS PROJECT FREEWAY SEGMENT LEVEL OF SERVICE

Freeway segments of I-280 and SR-85 were analyzed during the AM and PM peak hours by calculating the amount of Project traffic projected to be added to these freeway segments. To be conservative, no Project trips were assigned to the HOV lanes. **Table 4-2** presents the estimated number of trips added to the freeway segments under Existing plus Project Conditions and the estimated densities and service levels.

### 4.5 EXISTING PLUS PROJECT FREEWAY SEGMENT IMPACTS AND MITIGATION MEASURES

Traffic impacts on CMP freeway segments would occur when the addition of Project traffic causes the freeway segment operations to deteriorate from an acceptable level (LOS E or better) under Existing Conditions to an unacceptable level (LOS F) or an increase in traffic of more than one percent of the capacity of the segments that operate at LOS F under Existing Conditions.

As shown in **Table 4-2**, the Project would not add trips greater than one percent of the freeway segment capacity to the freeway study segments during the AM and PM peak hours. Therefore, the Project would have a **less-than-significant** freeway impact at the identified freeway study segments under Existing plus Project Conditions and no mitigation measures are proposed.

**TABLE 4-2: EXISTING PLUS PROJECT FREEWAY LEVEL OF SERVICE RESULTS**

Freeway Segment	Capacity <sup>1</sup>	Peak Hour <sup>2</sup>	Existing Conditions		Existing plus Project Conditions			
			Density <sup>3</sup>	LOS <sup>4</sup>	Trips <sup>5</sup>	Density <sup>3</sup>	LOS <sup>4</sup>	% Impact <sup>6</sup>
<b>SR-85 Northbound</b>								
Saratoga-Sunnyvale Rd to Stevens Creek Blvd	4,600	AM PM	<b>65</b> <b>103</b>	<b>F</b> <b>F</b>	<b>3</b> <b>67</b>	<b>65</b> <b>105</b>	<b>F</b> <b>F</b>	<0.01 <0.01
Stevens Creek Blvd to I-280	4,600	AM PM	21 52	C E	5 67	25 <b>78</b>	C <b>F</b>	<0.01 <0.01
<b>SR-85 Southbound</b>								
I-280 to Stevens Creek Blvd	6,900	AM PM	<b>89</b> 37	<b>F</b> D	10 54	<b>89</b> 37	<b>F</b> D	<0.01 <0.01
Stevens Creek Blvd to Saratoga-Sunnyvale Rd	6,900	AM PM	<b>81</b> 23	<b>F</b> C	10 54	<b>81</b> 23	<b>F</b> C	<0.01 <0.01
<b>I-280 Eastbound</b>								
SR-85 to De Anza Blvd	6,900	AM PM	<b>89</b> 37	<b>F</b> D	10 54	<b>89</b> 37	<b>F</b> D	<0.01 <0.01
De Anza Blvd to Wolfe Rd	6,900	AM PM	<b>81</b> 23	<b>F</b> C	10 54	<b>81</b> 23	<b>F</b> C	<0.01 <0.01
<b>I-280 Westbound</b>								
Wolfe Rd to De Anza Blvd	6,900	AM PM	<b>89</b> 37	<b>F</b> D	10 54	<b>89</b> 37	<b>F</b> D	<0.01 <0.01
De Anza Blvd to SR-85	6,900	AM PM	<b>81</b> 23	<b>F</b> C	10 54	<b>81</b> 23	<b>F</b> C	<0.01 <0.01

Notes: **Bold text** indicates intersection operates at unacceptable level of service.

1. Measured in vehicles per hour per lane.
2. AM = morning peak hour, PM = evening peak hour.
3. Measured in passenger cars per mile per lane.
4. LOS = level of service
5. Project trips added to individual freeway segments.
6. Percent Contribution determined by dividing the number of Project trips by the freeway segment's capacity.

Source: VTA Monitoring and Conformance Report, 2014; Fehr & Peers, 2016



## 5. BACKGROUND CONDITIONS

This chapter presents the results of the level of service calculations under Background Conditions with and without the Project. Traffic volumes for Background No Project Conditions comprise existing volumes plus traffic generated by “approved but not yet built” and “not occupied” developments to account for local growth in the study area. Background plus Project Conditions are defined as Background Conditions plus traffic generated by the Project.

### 5.1 BACKGROUND TRAFFIC VOLUMES

Background projects were identified in consultation with City staff and are identified in **Appendix E**. Vehicle trips from “approved but not yet built” and “not occupied” development projects in the study area were added to existing volumes. Trip generation estimates from these development projects were obtained from their respective traffic reports. Background traffic volumes are presented in **Figure 5-1**.

### 5.2 BACKGROUND PLUS PROJECT TRAFFIC VOLUMES

Trips generated from the Project were added to the Background traffic projections to develop traffic volumes for Background plus Project Conditions. The resulting volumes are shown on **Figure 5-2**.



### 5.3 BACKGROUND INTERSECTION LEVEL OF SERVICE

LOS calculations were conducted to evaluate signalized intersection operations under Background plus Project Conditions. The LOS analysis results for Background without and with the Project are summarized in **Table 5-1**. The corresponding LOS calculation sheets are included in **Appendix D**.

### 5.4 BACKGROUND INTERSECTION IMPACTS AND MITIGATION MEASURES

The results presented in **Table 5-1** show that one study intersection would operate unacceptably during the PM peak hour under Background Conditions and Background plus Project Conditions. This occurs at the De Anza Boulevard/Stevens Creek Boulevard intersection which is included in the Congestion Management Program. Based on the impact criteria identified in Chapter 1.5, the Project would have a **less-than-significant** impact. Therefore, no mitigation measures are required.



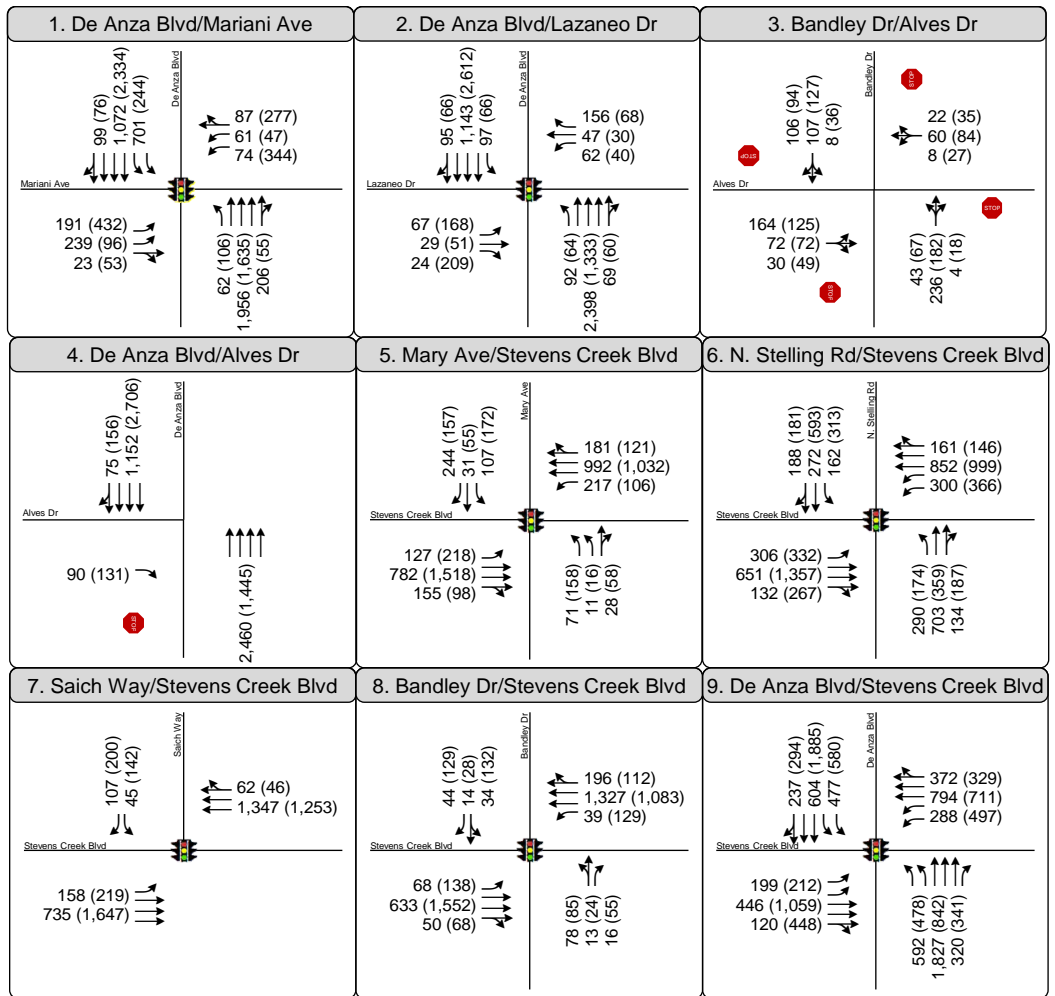
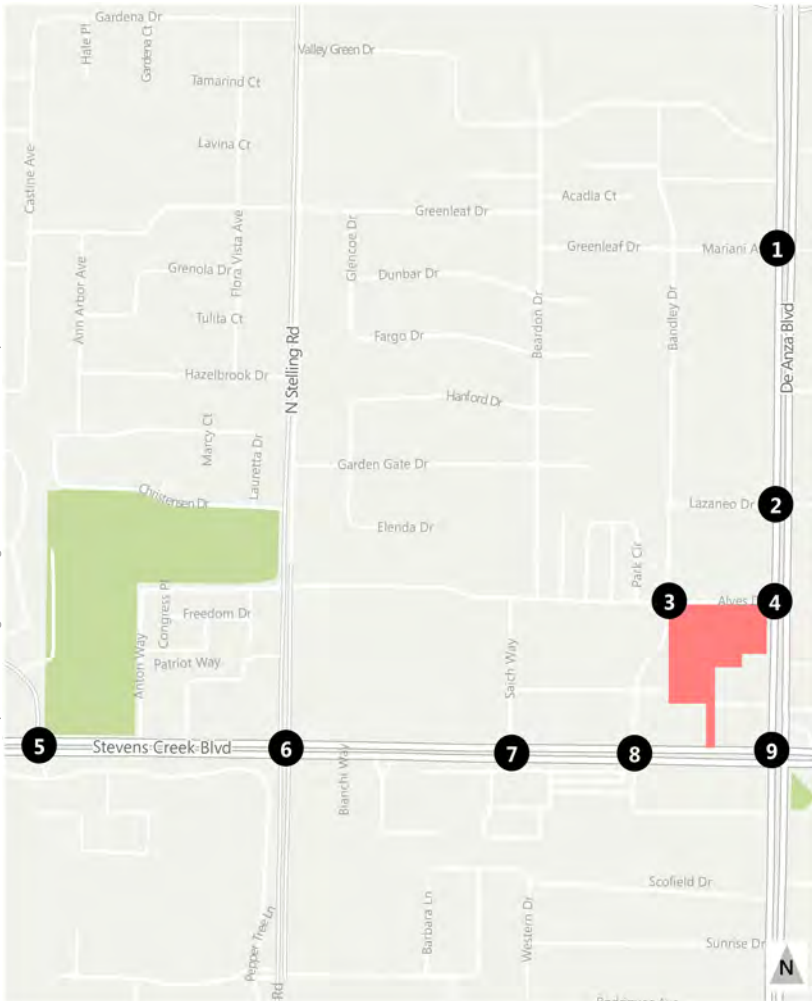


- XX(YY) AM(PM) Peak Hour Traffic Volumes
- Signalized Intersection
- Stop-controlled Intersection
- Project Site
- Study Intersection



Figure 5-1

Background Peak Hour Traffic Volumes and Lane Configurations

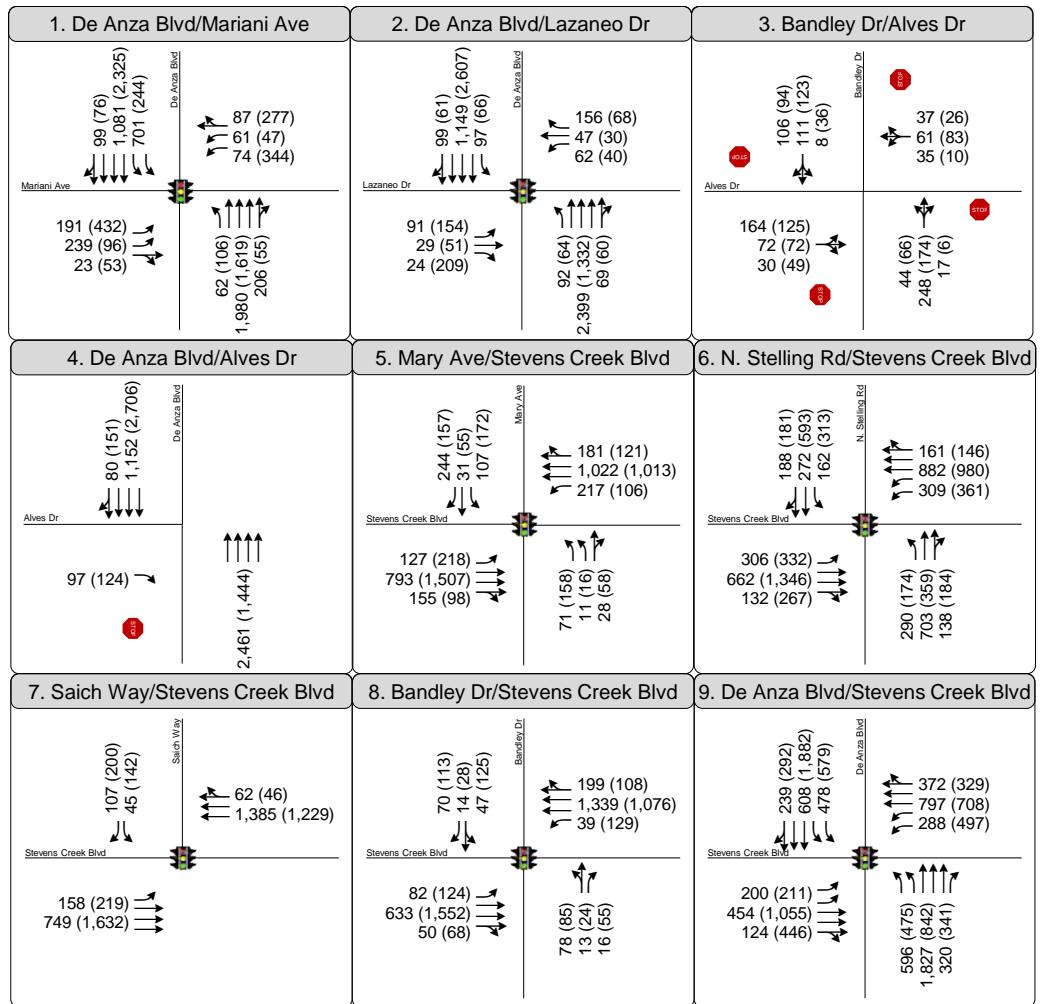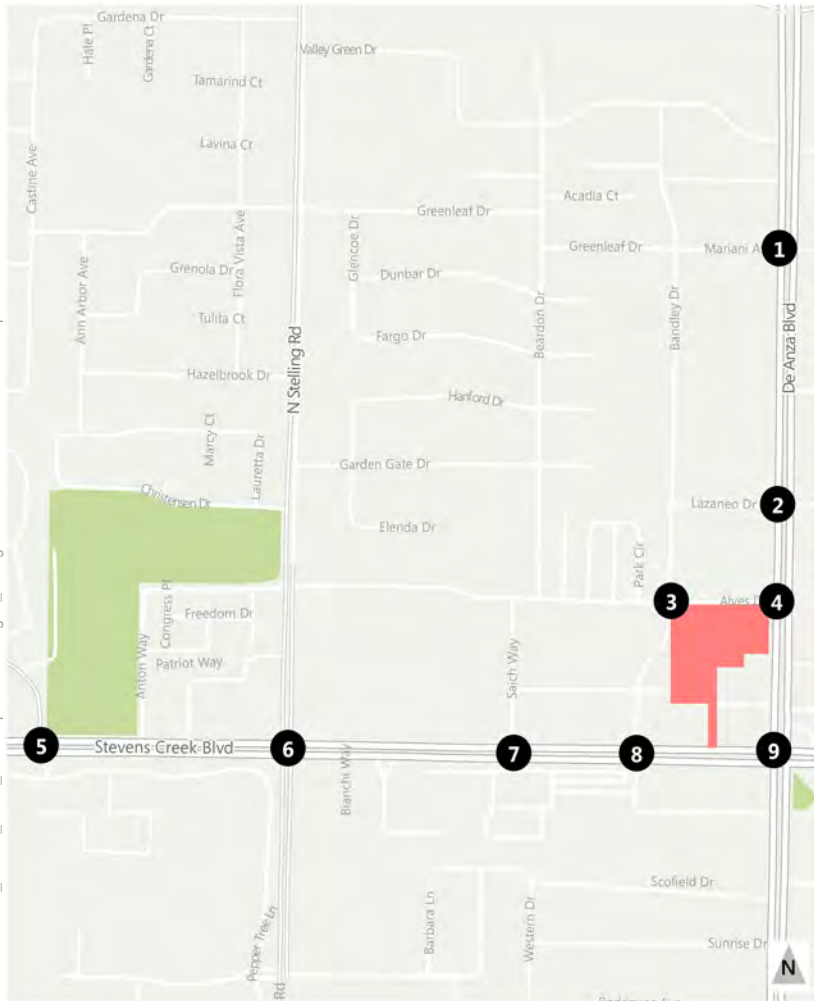

XX(YY) AM(PM) Peak Hour Traffic Volumes



Signalized Intersection



Stop-controlled Intersection

Project Site



Study Intersection



Figure 5-2

Background Plus Project Peak Hour Traffic Volumes and Lane Configurations

**TABLE 5-1: BACKGROUND PLUS PROJECT INTERSECTION LEVEL OF SERVICE RESULTS**

ID	Intersection	Control Type	Jurisdiction / CMP	LOS Threshold <sup>1</sup>	Peak Hour <sup>2</sup>	Background		Background plus Project			
						Delay <sup>3</sup>	LOS <sup>4</sup>	Delay <sup>3</sup>	LOS <sup>4</sup>	Δ in Crit. V/C <sup>5</sup>	Δ in Crit. Delay <sup>6</sup>
1	De Anza Boulevard and Mariani Avenue	Signal	Cupertino	D	AM PM	36.2 42.1	D D	36.2 42.1	D D	0.003 0.001	0.0 0.0
2	De Anza Boulevard and Lazaneo Drive	Signal	Cupertino	D	AM PM	17.2 19.5	B B	17.4 19.5	B B	0.000 0.001	0.0 0.0
3	Bandley Drive and Alves Drive	SSSC	Cupertino	D	AM PM	11.0 11.3	B B	11.7 10.9	B B	0.053 0.033	0.7 -0.4
4	De Anza Boulevard and Alves Drive	SSSC	Cupertino	D	AM PM	11.1 20.9	B C	11.2 20.4	B C	0.011 0.019	0.0 0.0
5	Mary Avenue and Stevens Creek Boulevard	Signal	Cupertino	D	AM PM	33.7 32.9	C C	33.5 33.0	C C	0.002 0.002	-0.1 0.1
6	N. Stelling Road and Stevens Creek Boulevard	Signal	Cupertino/CMP	E+	AM PM	43.0 39.6	D D	43.0 39.4	D D	0.006 0.005	-0.1 -0.2
7	Saich Way and Stevens Creek Boulevard	Signal	Cupertino	D	AM PM	15.3 21.3	B C	15.1 21.4	B C	0.007 0.005	-0.3 0.2
8	Bandley Drive and Stevens Creek Boulevard	Signal	Cupertino	D	AM PM	14.6 23.9	B C	15.7 23.0	B C	0.011 0.004	0.9 -0.4
9	De Anza Boulevard and Stevens Creek Boulevard	Signal	Cupertino/CMP	E+	AM PM	39.0 <b>63.5</b>	D <b>E</b>	39.1 <b>62.9</b>	D <b>E</b>	0.001 0.003	0.1 -1.1

Notes: **Bold text** indicates intersection operates at unacceptable level of service.

1. LOS Threshold is the lowest acceptable LOS (the threshold between acceptable and unacceptable level of service).
2. AM = morning peak hour, PM = evening peak hour.
3. Whole intersection weighted average control delay expressed in seconds per vehicle calculated using methods described in the 2000 *Highway Capacity Manual*, with adjusted saturation flow rates to reflect Santa Clara County Conditions for signalized intersections.
4. LOS = Level of Service. LOS calculations conducted using the TRAFFIX analysis software packages, which apply the methods described in the 2000 *Highway Capacity Manual*.
5. Change in critical volume to capacity ratio between Background and Background plus Project Conditions
6. Change in average critical movement delay between Background and Background plus Project Conditions.
7. Signal = Signalized intersection, SSSC = Side-street stop controlled intersection

Source: Fehr & Peers, 2016.

## **6. SITE ACCESS, ON-SITE CIRCULATION, MULTI-MODAL TRANSPORTATION, AND PARKING ASSESSMENT**

This chapter of the report discusses transportation impacts related to accessing and navigating the Project site and impacts to pedestrians, bicyclists, and transit. Topics discussed include vehicular site access and on-site circulation, pedestrian and bicycle site access and circulation, and transit vehicle delay and site access.

### **6.1 VEHICLE ACCESS AND CIRCULATION REVIEW**

The site plan for the proposed Project is presented in **Figure 1-2**. The site plan indicates the location of the Project driveways and the internal circulation system for automobile, pedestrian, and bicycle traffic. The Project provides access via two driveways on Alves Drive, one driveway on Bandlely Drive, and one driveway on Stevens Creek Boulevard. All driveways provide full access with the exception of the driveway on Stevens Creek Boulevard which is right-turn only inbound and outbound.

The hotel at Building A can only be accessed from Alves Drive while buildings B and C can be accessed from three of the four driveways. A common subterranean parking facility for buildings B and C allows for enhanced circulation within the site so that residents and patrons may use various access points.

Vehicle circulation in the parking structure will consist of ramps that allow for residents/visitors to access all levels of the garage. Emergency vehicle access for the Project perimeters will be provided by a dual use road off Alves Drive between buildings A and B. This road is currently expected to accommodate emergency vehicles like fire trucks but will also permit use for moving trucks and garbage trucks. Loading zone and garbage pick-up zone locations however will be located off-road which allows emergency vehicles to have complete access.

### **6.2 PEDESTRIAN ACCESS AND CIRCULATION**

Pedestrian access to the Project site is provided by a mostly complete network of sidewalks and crosswalks. Sidewalks are provided along the frontage of the Project site along Alves Drive to the north and Bandlely Drive to the west. There are crosswalks at all four approaches at the intersections of Alves Drive and Bandlely Drive, northwest of the Project site, and at Bandlely Drive and Stevens Creek Boulevard, south of the Project site. Pedestrian walkways are also proposed within the site plan for safe connections between buildings and between the hotel and nearby retail and restaurants on Stevens Creek Boulevard.

## 6.3 BICYCLE ACCESS AND CIRCULATION

Bicycle access to the Marina Plaza development is accommodated by bicycle lanes (Class II) on surrounding roadways such as De Anza Boulevard and Stevens Creek Boulevard and bike routes on Bandlely Drive and Alves Drive.

## 6.4 TRANSIT NETWORK

The VTA TIA Guidelines Section 9.2 requires analysis of transit network performance including transit access and facilities and transit vehicle delay; therefore it is provided in this TIA for informational purposes. An assessment of transit access and facilities near the Project site is provided in **Chapter 2**. The Guidelines state that the transit vehicle delay analysis includes the following components:

- **A qualitative assessment** of additional transit vehicle delay caused by any roadway or intersection geometry changes proposed by the Project, taking into account unique considerations of transit vehicles compared to autos (e.g., pulling into and out of stops, longer gaps needed for left turns). These qualitative considerations may also inform the assessment of transit vehicle delay caused by auto congestion;
- **A quantitative estimate** of additional seconds of transit vehicle delay that will result from automobile congestion caused by the Project and any changes to signal operations proposed by the Project. This analysis may utilize information produced by the intersection Auto Level of Service (LOS) analysis or other sources, if available.

There is not a well-established national methodology for quantitatively evaluating transit network performance due to roadway congestion. Increased roadway congestion can affect transit vehicle travel time/speed and service reliability. For the purposes of this study, transit network performance is analyzed during the AM and PM peak hour based on the average transit vehicle delay associated with congestion at signalized intersections along a specified corridor with and without the Project. The change in average transit vehicle delay will be determined using the following process:

- Review TRAFFIX analysis software output for intersection delay. The average delay, by movement, at each intersection within a study corridor in the transit vehicle path of travel will be determined.
- The transit vehicle average delay due to congestion at intersections will be determined by summing the movement delay for each signalized intersection along the study transit corridor.
- Without and With Project average transit vehicle delay associated with congestion at intersections will be compared. Note that the transit vehicle dwell time at transit stops is not included in the analysis.

The agencies do not have a documented method for determining which transit corridors should be analyzed. For purposes of this study (based on coordination with agency staff), the following routes within one mile of the Project site and that have full day service with a frequency of 30 minutes or less are analyzed:

- Route 25 - De Anza College to Alum Rock Transit Center via Valley Medical Center
- Route 53 - West Valley College to Sunnyvale Transit Center
- Route 55 - De Anza College to Great America

The City of Cupertino and the VTA do not have documented standards related to transit corridor performance associated with congestion resulting from new development projects. Per the VTA TIA Guidelines, *if increased transit vehicle delay is found, the Lead Agency [City of Cupertino] should work with VTA to identify feasible transit priority measures near the affected facility and include contributions to any applicable projects that improve transit speed and reliability in the TIA.*

Transit capacity is often measured in terms of the average peak load factor, a ratio of the average peak number of passengers on-board during the peak period to supply of seats (capacity). The transit capacity analysis evaluates if the net new AM and PM peak hour trips added by the Project would exceed the available capacity on the public transit routes that serve the Project site. The analysis makes use of VTA's guidelines for capacity and peak load, by service type, detailed in the Peak Vehicle Load Factors established in the *Title VI: System-Wide Service Standards & Policies* (OPS PL-0059, dated November 8, 2014).<sup>5</sup> VTA regularly monitors the performance of its fixed bus and light rail per FTA Title VI requirements. The peak load factor is a ratio between the standard passenger load and the seated capacity of a route, per vehicle, during the peak period. If the passenger standard is greater than the seated capacity, some passengers are assumed to be standing in the vehicle rather than seated. If a route exceeds its respective load factor standard due to the addition of project-related transit passengers, a significant impact would occur. The Peak Vehicle Load Factor standards and seat capacity (passengers per vehicle) for VTA bus service types are as follows:

- Local and Core Bus Routes:
  - Seated Capacity: 37 passengers per vehicle
  - Passengers (seated plus standees): 44.4 passengers
  - Load Factor Standard: 1.2
- Express and Limited Stop Routes<sup>6</sup>
  - Seated Capacity: 39 passengers per vehicle
  - Load Factor Standard: 1.0

---

<sup>5</sup> OPS-PL-0059 Title VI System Wide Service Standards Policies, VTA, 2013.

<sup>6</sup> Express and Limited Stop routes on VTA are subject to a reduced load factor standard of 1.0 to determine if additional capacity should be provided (VTA, OPS PL-0059, dated November 8, 2014).



## 6.5 TRANSIT EVALUATION

This section discusses transit vehicle delay and transit access within the study area.

### 6.5.1 TRANSIT SITE ACCESS

Transit stops are available immediately south of the Project site. VTA bus routes 25, 53, and 55 for both the northbound and southbound direction stop less than 0.15 miles north of the Project. Pedestrians can access these transit routes using sidewalks and crosswalks along Alves Drive, Bandlely Drive, Stevens Creek Boulevard and De Anza Boulevard.

### 6.5.2 TRANSIT VEHICLE CAPACITY

Transit routes near the Project site have low average peak load factors ranging from 0.07 to 0.25, which indicate that only about 25 percent or less of the seats on the buses on these transit routes are occupied. Because of the limited number of transit stops in the area, it is unlikely that the Project will generate transit demand that would exceed to the available transit vehicle capacity.

### 6.5.3 TRANSIT VEHICLE DELAY (FOR INFORMATIONAL PURPOSES)

Transit vehicles operating on the roadways in the Project vicinity could incur additional delay due to increased traffic congestion. The primary corridors near the Project site are De Anza Boulevard and Stevens Creek Boulevard. The differences between the No Project and Plus Project through movement delays along these primary corridors were used to determine the potential added transit vehicle delay. In many cases there is an expected decrease in delay along these transit corridors due to more efficient signal operations anticipated with the Project in place. The analysis results are shown in **Table 6-1**.

**TABLE 6-1: TRANSIT VEHICLE DELAY**

Route		Peak Hour	Projected Additional Delay (sec)			
			Existing plus Project		Background plus Project	
			NB / EB	SB / WB	NB / EB	SB / WB
25	Stevens Creek Boulevard from Stelling Road to Bandlely Drive	AM	-0.1	-0.1	-0.1	0.0
		PM	-0.4	-1.3	-0.5	-1.2
53	De Anza Boulevard from Mariani Avenue to Stevens Creek Boulevard	AM	0.4	0.4	0.1	-0.2
		PM	-0.3	-0.2	0.0	-1.0
55	Stevens Creek at Stelling Road	AM	-0.1	-0.2	0.3	0.4
		PM	0.1	-0.8	-0.4	-0.2

Source: Fehr & Peers, 2016

## 6.6 PARKING ASSESSMENT

The City of Cupertino has vehicle and bicycle requirements for new developments.

### 6.6.1 VEHICLE PARKING

Per the City of Cupertino requirements, developments are required to provide parking based on the number of spaces needed for each specific land use. The total required parking for the proposed development is 666 spaces, which is slightly exceeded by the number of spaces on the Project site plan (667 spaces). **Table 6-2** summarizes the required and provided vehicle parking at the Project site. It is noted that the City's Municipal Code does allow for shared parking adjustments for mixed-use developments and as a result there could be opportunities to reduce the Project's parking provision on this basis.



**TABLE 6-2: SUMMARY OF VEHICLE PARKING AT THE PROJECT SITE**

Land Use	Parking Ratio		Units	Required Parking	Proposed Parking
Hotel	1.1 stall/room 1 stall/employee		122 rooms 12 employees	135	135
Retail/ Restaurant	Restaurant w/o Bar	1 stall/4 chairs 1 stall/employee	215 chairs 20 employees	162	162
	Fast Food Restaurant	1 stall/3 chairs 1 stall/employee	55 chairs 5 employees		
	Retail	1 stall/250 SF 1 stall/employee	9,356 SF 14 employees		
	Retail Service	1 stall/175 SF 1 stall/employee	1,466 SF 2 employees		
Residential - Apartment	Affordable Housing Units	1 stall/1-bedroom DU 2 stall/2 or 3-bedroom DU	16 DU	369	370
	Market Rate	2 stalls/2-bedroom DU	172 DU		
<b>TOTAL</b>				<b>666</b>	<b>667</b>

## 6.6.2 BICYCLE PARKING

The City of Cupertino has bicycle parking requirements based on land use. Two types of bicycle parking facilities are required: Class I and Class II storage facilities. Class I facilities protect the entire bicycle from theft, vandalism, and inclement weather and are appropriate for long-term storage. Examples include bike lockers, rooms with key access, guarded parking areas, and valet/check-in parking. Class II parking facilities are for more temporary bike parking and include bicycle racks to which the frame and at least one wheel can be secured with a user-provided lock.

For hotels, lodging, restaurant without bar and other commercial general use, the number of bicycle parking spaces must be at least 5% of auto parking spaces. Meanwhile, high density apartments are required to provide 0.4 bicycle storage spaces per dwelling unit. In total, Marina Plaza is required to provide 90 bicycle parking spaces. The proposed site plan does not indicate the number and type of bicycle storage facilities to be provided.

It is recommended that additional bicycle parking as a combination of Class I and Class II facilities per NACTO guidelines. Class I, or long term, facilities will benefit hotel guests and apartment residents. Class II, or short term, facilities will benefit restaurant and retail patrons.

**APPENDIX A: EXISTING TRAFFIC COUNTS**



# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 1AM FINAL  
 Site Code : 00000001  
 Start Date : 2/23/2016  
 Page No : 1

Groups Printed- Vehicles

Start Time	N DE ANZA BLVD Southbound					MARIANI AVE Westbound					N DE ANZA BLVD Northbound					MARIANI AVE Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
07:00 AM	11	145	59	5	220	6	11	2	0	19	12	238	6	3	259	0	17	22	5	44	542
07:15 AM	11	141	50	7	209	13	12	8	2	35	22	338	13	2	375	2	22	14	3	41	660
07:30 AM	10	138	64	5	217	12	6	5	0	23	17	394	6	8	425	0	15	36	9	60	725
07:45 AM	12	182	91	4	289	16	19	14	0	49	51	431	13	31	526	3	50	29	2	84	948
Total	44	606	264	21	935	47	48	29	2	126	102	1401	38	44	1585	5	104	101	19	229	2875
08:00 AM	18	254	165	11	448	42	39	38	9	128	49	426	13	18	506	3	81	39	3	126	1208
08:15 AM	19	268	145	18	450	13	8	7	3	31	47	562	10	11	630	5	32	53	3	93	1204
08:30 AM	23	222	187	24	456	10	6	12	6	34	47	454	16	24	541	5	51	51	2	109	1140
08:45 AM	37	251	187	31	506	20	7	15	13	55	58	425	22	30	535	9	69	43	4	125	1221
Total	97	995	684	84	1860	85	60	72	31	248	201	1867	61	83	2212	22	233	186	12	453	4773
Grand Total	141	1601	948	105	2795	132	108	101	33	374	303	3268	99	127	3797	27	337	287	31	682	7648
Apprch %	5	57.3	33.9	3.8		35.3	28.9	27	8.8		8	86.1	2.6	3.3		4	49.4	42.1	4.5		
Total %	1.8	20.9	12.4	1.4	36.5	1.7	1.4	1.3	0.4	4.9	4	42.7	1.3	1.7	49.6	0.4	4.4	3.8	0.4	8.9	

Start Time	N DE ANZA BLVD Southbound					MARIANI AVE Westbound					N DE ANZA BLVD Northbound					MARIANI AVE Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 08:00 AM																					
08:00 AM	18	254	165		437	42	39	38		119	49	426	13		488	3	81	39		123	1167
08:15 AM	19	268	145		432	13	8	7		28	47	562	10		619	5	32	53		90	1169
08:30 AM	23	222	187		432	10	6	12		28	47	454	16		517	5	51	51		107	1084
08:45 AM	37	251	187		475	20	7	15		42	58	425	22		505	9	69	43		121	1143
Total Volume	97	995	684		1776	85	60	72		217	201	1867	61		2129	22	233	186		441	4563
% App. Total	5.5	56	38.5			39.2	27.6	33.2			9.4	87.7	2.9			5	52.8	42.2			
PHF	.655	.928	.914		.935	.506	.385	.474		.456	.866	.831	.693		.860	.611	.719	.877		.896	.976

# Traffic Data Service


Campbell, CA  
 (408) 377-2988  
*tdsbay@cs.com*

File Name : 1AM FINAL

Site Code : 00000001

Start Date : 2/23/2016

Page No : 2

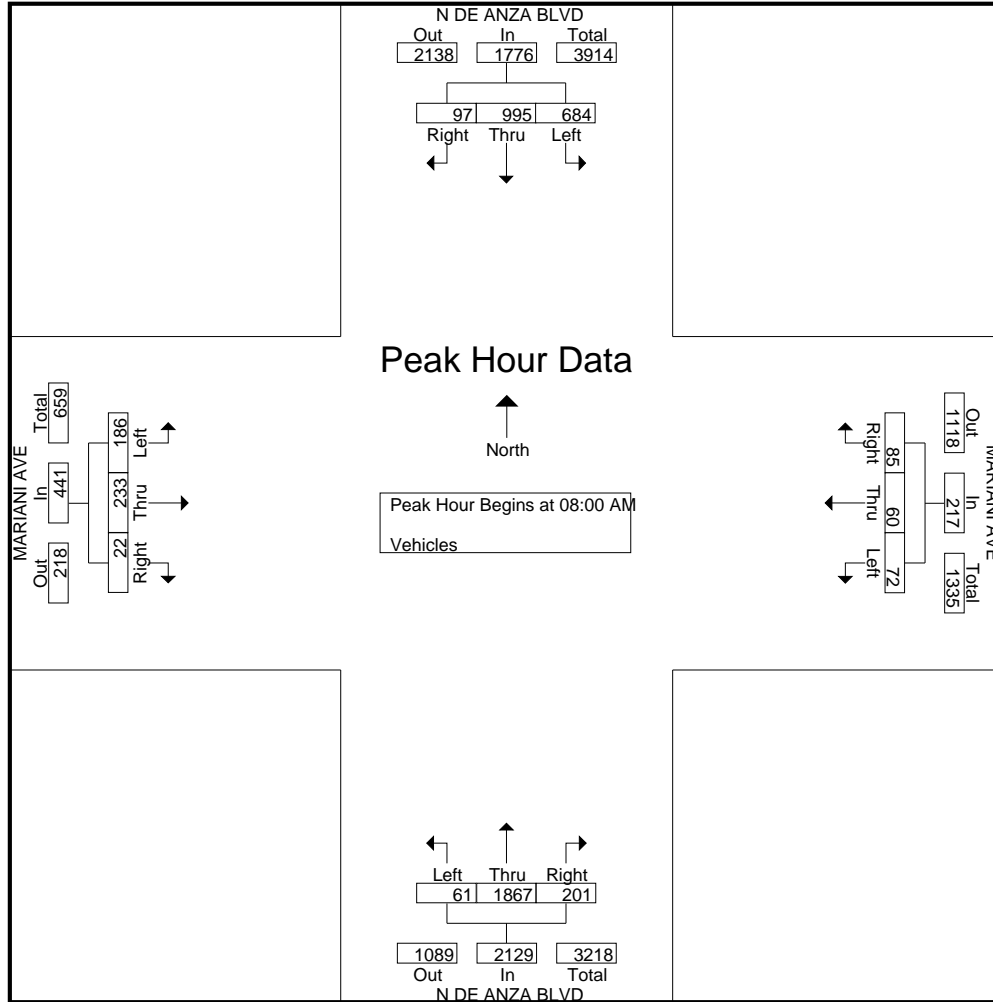

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 1AM FINAL  
 Site Code : 00000001  
 Start Date : 2/23/2016  
 Page No : 1

## Groups Printed- Bikes

Start Time	N DE ANZA BLVD Southbound					MARIANI AVE Westbound					N DE ANZA BLVD Northbound					MARIANI AVE Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
07:00 AM	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	2
07:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	2	0	3	3
07:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	1
07:45 AM	0	1	0	0	1	0	1	0	0	1	1	2	0	0	3	0	6	0	0	6	11
Total	0	2	0	0	2	0	1	0	0	1	1	2	0	0	3	0	9	2	0	11	17
08:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	12	0	0	12	12
08:15 AM	0	0	1	0	1	0	0	0	0	0	0	3	0	0	3	0	2	0	0	2	6
08:30 AM	0	0	0	0	0	0	0	0	0	0	1	1	0	0	2	1	2	0	0	3	5
08:45 AM	0	0	0	0	0	0	0	0	0	0	1	4	0	0	5	0	4	0	0	4	9
Total	0	0	1	0	1	0	0	0	0	0	2	8	0	0	10	1	20	0	0	21	32
Grand Total	0	2	1	0	3	0	1	0	0	1	3	10	0	0	13	1	29	2	0	32	49
Apprch %	0	66.7	33.3	0		0	100	0	0		23.1	76.9	0	0		3.1	90.6	6.2	0		
Total %	0	4.1	2	0	6.1	0	2	0	0	2	6.1	20.4	0	0	26.5	2	59.2	4.1	0	65.3	

Start Time	N DE ANZA BLVD Southbound				MARIANI AVE Westbound				N DE ANZA BLVD Northbound				MARIANI AVE Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:45 AM																	
07:45 AM	0	1	0	1	0	1	0	1	1	2	0	3	0	6	0	6	11
08:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	12	0	12	12
08:15 AM	0	0	1	1	0	0	0	0	0	3	0	3	0	2	0	2	6
08:30 AM	0	0	0	0	0	0	0	0	1	1	0	2	1	2	0	3	5
Total Volume	0	1	1	2	0	1	0	1	2	6	0	8	1	22	0	23	34
% App. Total	0	50	50		0	100	0		25	75	0		4.3	95.7	0		
PHF	.000	.250	.250	.500	.000	.250	.000	.250	.500	.500	.000	.667	.250	.458	.000	.479	.708

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 1AM FINAL

Site Code : 00000001

Start Date : 2/23/2016

Page No : 2

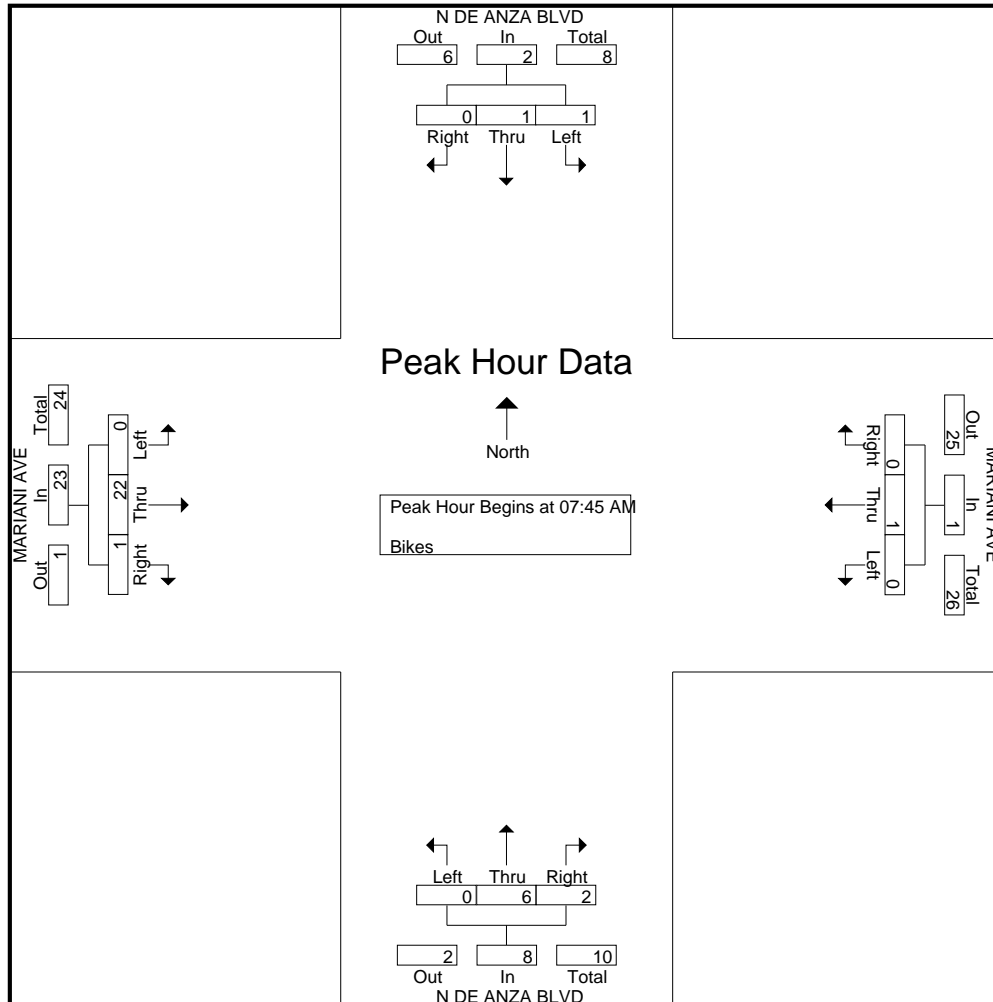

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 1PM FINAL  
 Site Code : 00000001  
 Start Date : 2/23/2016  
 Page No : 1

## Groups Printed- Vehicles


Start Time	N DE ANZA BLVD Southbound					MARIANI AVE Westbound					N DE ANZA BLVD Northbound					MARIANI AVE Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	11	344	76	51	482	35	13	48	15	111	17	278	14	61	370	13	30	63	8	114	1077
04:15 PM	13	416	64	24	517	36	17	23	5	81	15	270	19	34	338	6	23	39	8	76	1012
04:30 PM	5	440	82	25	552	46	12	51	8	117	12	264	13	23	312	7	14	64	3	88	1069
04:45 PM	23	417	53	29	522	39	11	58	4	112	19	302	10	40	371	8	18	73	7	106	1111
Total	52	1617	275	129	2073	156	53	180	32	421	63	1114	56	158	1391	34	85	239	26	384	4269
05:00 PM	18	560	69	37	684	61	10	66	6	143	15	379	26	35	455	8	23	95	6	132	1414
05:15 PM	20	535	58	26	639	66	15	99	4	184	15	323	36	38	412	14	28	95	1	138	1373
05:30 PM	21	578	44	27	670	69	10	84	1	164	13	416	20	24	473	14	20	105	7	146	1453
05:45 PM	12	461	58	32	563	64	9	74	7	154	9	361	18	29	417	14	19	111	0	144	1278
Total	71	2134	229	122	2556	260	44	323	18	645	52	1479	100	126	1757	50	90	406	14	560	5518
Grand Total	123	3751	504	251	4629	416	97	503	50	1066	115	2593	156	284	3148	84	175	645	40	944	9787
Apprch %	2.7	81	10.9	5.4		39	9.1	47.2	4.7		3.7	82.4	5	9		8.9	18.5	68.3	4.2		
Total %	1.3	38.3	5.1	2.6	47.3	4.3	1	5.1	0.5	10.9	1.2	26.5	1.6	2.9	32.2	0.9	1.8	6.6	0.4	9.6	

Start Time	N DE ANZA BLVD Southbound				MARIANI AVE Westbound				N DE ANZA BLVD Northbound				MARIANI AVE Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 05:00 PM																	
05:00 PM	18	560	<b>69</b>	<b>647</b>	61	10	66	137	<b>15</b>	379	26	420	8	23	95	126	1330
05:15 PM	20	535	58	613	66	<b>15</b>	<b>99</b>	<b>180</b>	15	323	<b>36</b>	374	<b>14</b>	<b>28</b>	95	137	1304
05:30 PM	<b>21</b>	<b>578</b>	44	643	<b>69</b>	10	84	163	13	<b>416</b>	20	<b>449</b>	14	20	105	139	<b>1394</b>
05:45 PM	12	461	58	531	64	9	74	147	9	361	18	388	14	19	<b>111</b>	<b>144</b>	1210
Total Volume	71	2134	229	2434	260	44	323	627	52	1479	100	1631	50	90	406	546	5238
% App. Total	2.9	87.7	9.4		41.5	7	51.5		3.2	90.7	6.1		9.2	16.5	74.4		
PHF	.845	.923	.830	.940	.942	.733	.816	.871	.867	.889	.694	.908	.893	.804	.914	.948	.939

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
*idsbay@cs.com*

File Name : 1PM FINAL  
 Site Code : 00000001  
 Start Date : 2/23/2016  
 Page No : 2

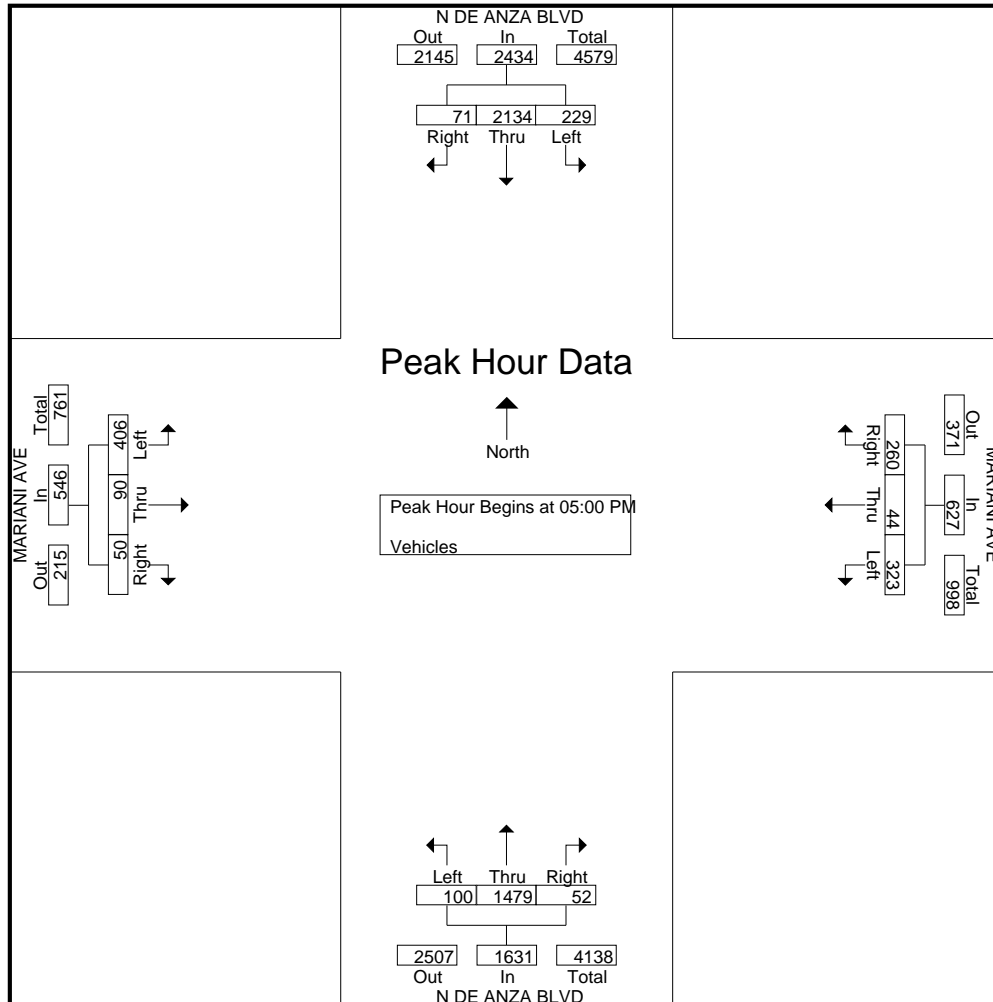



# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 1PM FINAL  
 Site Code : 00000001  
 Start Date : 2/23/2016  
 Page No : 1

Groups Printed- Bikes

Start Time	N DE ANZA BLVD Southbound					MARIANI AVE Westbound					N DE ANZA BLVD Northbound					MARIANI AVE Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	5	0	0	0	5	0	2	0	0	2	0	0	0	0	0	0	6	0	0	6	13
04:15 PM	2	0	0	0	2	0	4	0	0	4	0	2	0	0	2	0	0	1	0	1	9
04:30 PM	1	0	0	0	1	0	10	0	0	10	2	4	0	0	6	0	5	0	0	5	22
04:45 PM	0	0	0	0	0	0	4	0	0	4	1	0	0	0	1	0	6	0	0	6	11
<b>Total</b>	<b>8</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>8</b>	<b>0</b>	<b>20</b>	<b>0</b>	<b>0</b>	<b>20</b>	<b>3</b>	<b>6</b>	<b>0</b>	<b>0</b>	<b>9</b>	<b>0</b>	<b>17</b>	<b>1</b>	<b>0</b>	<b>18</b>	<b>55</b>
05:00 PM	0	0	0	0	0	0	0	0	0	0	0	4	0	0	4	0	4	0	0	4	8
05:15 PM	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	0	4	0	0	4	5
05:30 PM	0	0	0	0	0	0	0	0	0	0	1	2	0	0	3	1	2	0	0	3	6
05:45 PM	0	0	0	0	0	1	0	0	0	1	0	3	0	0	3	0	6	0	0	6	10
<b>Total</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>1</b>	<b>10</b>	<b>0</b>	<b>0</b>	<b>11</b>	<b>1</b>	<b>16</b>	<b>0</b>	<b>0</b>	<b>17</b>	<b>29</b>
Grand Total	8	0	0	0	8	1	20	0	0	21	4	16	0	0	20	1	33	1	0	35	84
Apprch %	100	0	0	0		4.8	95.2	0	0		20	80	0	0		2.9	94.3	2.9	0		
Total %	9.5	0	0	0	9.5	1.2	23.8	0	0	25	4.8	19	0	0	23.8	1.2	39.3	1.2	0	41.7	

Start Time	N DE ANZA BLVD Southbound					MARIANI AVE Westbound					N DE ANZA BLVD Northbound					MARIANI AVE Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 04:00 PM																					
04:00 PM	5	0	0	0	5	0	2	0	0	2	0	0	0	0	0	0	6	0	0	6	13
04:15 PM	2	0	0	0	2	0	4	0	0	4	0	2	0	0	2	0	0	1	0	1	9
04:30 PM	1	0	0	0	1	0	10	0	0	10	2	4	0	0	6	0	5	0	0	5	22
04:45 PM	0	0	0	0	0	0	4	0	0	4	1	0	0	0	1	0	6	0	0	6	11
Total Volume	8	0	0	0	8	0	20	0	0	20	3	6	0	0	9	0	17	1	0	18	55
% App. Total	100	0	0	0		0	100	0	0		33.3	66.7	0	0		0	94.4	5.6	0		
PHF	.400	.000	.000	.000	.400	.000	.500	.000	.000	.500	.375	.375	.000	.000	.375	.000	.708	.250	.000	.750	.625

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 1PM FINAL

Site Code : 00000001

Start Date : 2/23/2016

Page No : 2

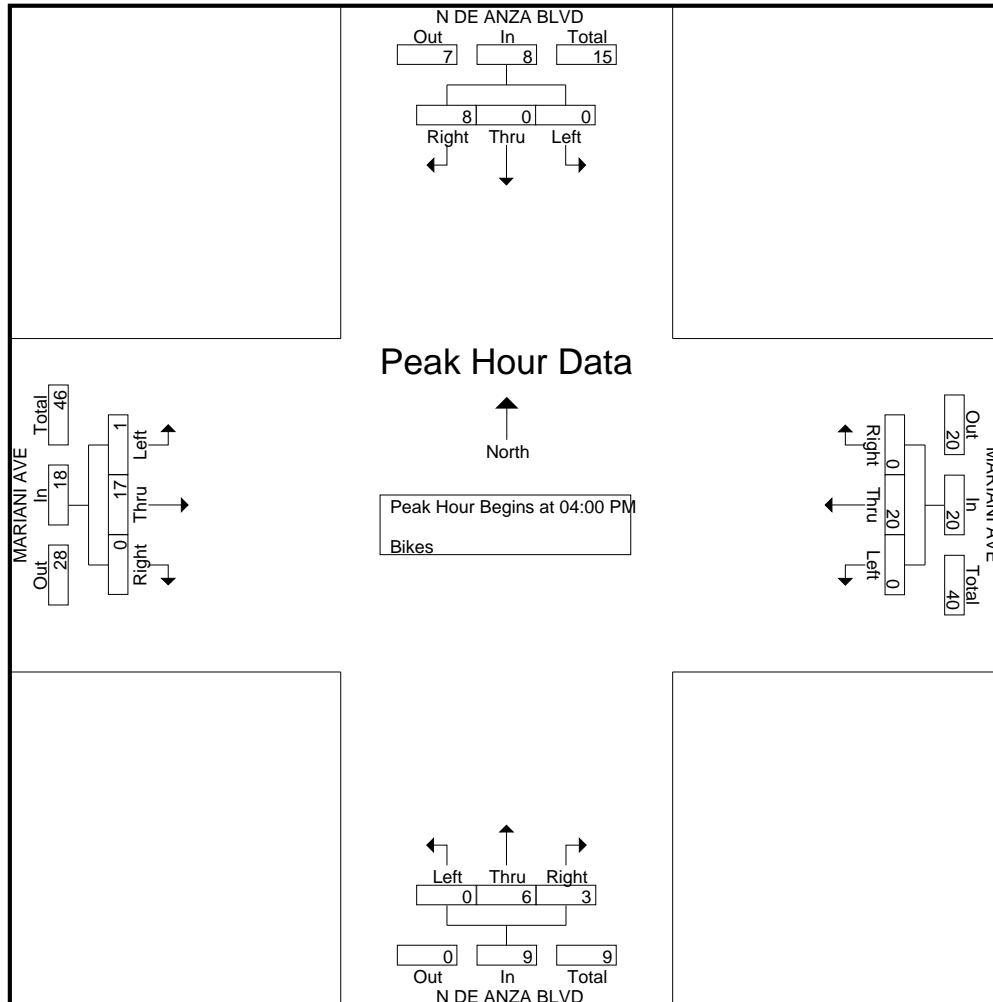

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 2AM FINAL  
 Site Code : 00000002  
 Start Date : 2/23/2016  
 Page No : 1

Groups Printed- Vehicles

Start Time	N DE ANZA BLVD Southbound					LAZANEO DR Westbound					N DE ANZA BLVD Northbound					LAZANEO DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
07:00 AM	8	131	9	0	148	26	4	11	0	41	20	234	2	2	258	3	12	5	3	23	470
07:15 AM	9	140	10	0	159	31	10	15	2	58	18	345	7	0	370	2	5	4	5	16	603
07:30 AM	6	136	13	1	156	25	3	4	0	32	16	403	14	2	435	5	5	11	6	27	650
07:45 AM	8	193	20	2	223	28	10	12	3	53	39	525	13	3	580	3	15	8	8	34	890
Total	31	600	52	3	686	110	27	42	5	184	93	1507	36	7	1643	13	37	28	22	100	2613
08:00 AM	18	275	10	1	304	43	10	15	4	72	26	508	13	1	548	5	10	12	3	30	954
08:15 AM	18	306	14	3	341	37	8	18	10	73	9	589	20	1	619	5	8	13	6	32	1065
08:30 AM	29	198	35	1	263	30	12	12	9	63	10	585	28	2	625	3	7	16	6	32	983
08:45 AM	24	238	32	3	297	36	14	13	6	69	19	516	25	5	565	9	2	22	6	39	970
Total	89	1017	91	8	1205	146	44	58	29	277	64	2198	86	9	2357	22	27	63	21	133	3972
Grand Total	120	1617	143	11	1891	256	71	100	34	461	157	3705	122	16	4000	35	64	91	43	233	6585
Apprch %	6.3	85.5	7.6	0.6		55.5	15.4	21.7	7.4		3.9	92.6	3	0.4		15	27.5	39.1	18.5		
Total %	1.8	24.6	2.2	0.2	28.7	3.9	1.1	1.5	0.5	7	2.4	56.3	1.9	0.2	60.7	0.5	1	1.4	0.7	3.5	

Start Time	N DE ANZA BLVD Southbound				LAZANEO DR Westbound				N DE ANZA BLVD Northbound				LAZANEO DR Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 08:00 AM																	
08:00 AM	18	275	10	303	43	10	15	68	26	508	13	547	5	10	12	27	945
08:15 AM	18	306	14	338	37	8	18	63	9	589	20	618	5	8	13	26	1045
08:30 AM	29	198	35	262	30	12	12	54	10	585	28	623	3	7	16	26	965
08:45 AM	24	238	32	294	36	14	13	63	19	516	25	560	9	2	22	33	950
Total Volume	89	1017	91	1197	146	44	58	248	64	2198	86	2348	22	27	63	112	3905
% App. Total	7.4	85	7.6		58.9	17.7	23.4		2.7	93.6	3.7		19.6	24.1	56.2		
PHF	.767	.831	.650	.885	.849	.786	.806	.912	.615	.933	.768	.942	.611	.675	.716	.848	.934

# Traffic Data Service


Campbell, CA  
 (408) 377-2988  
*idsbay@cs.com*

File Name : 2AM FINAL

Site Code : 00000002

Start Date : 2/23/2016

Page No : 2

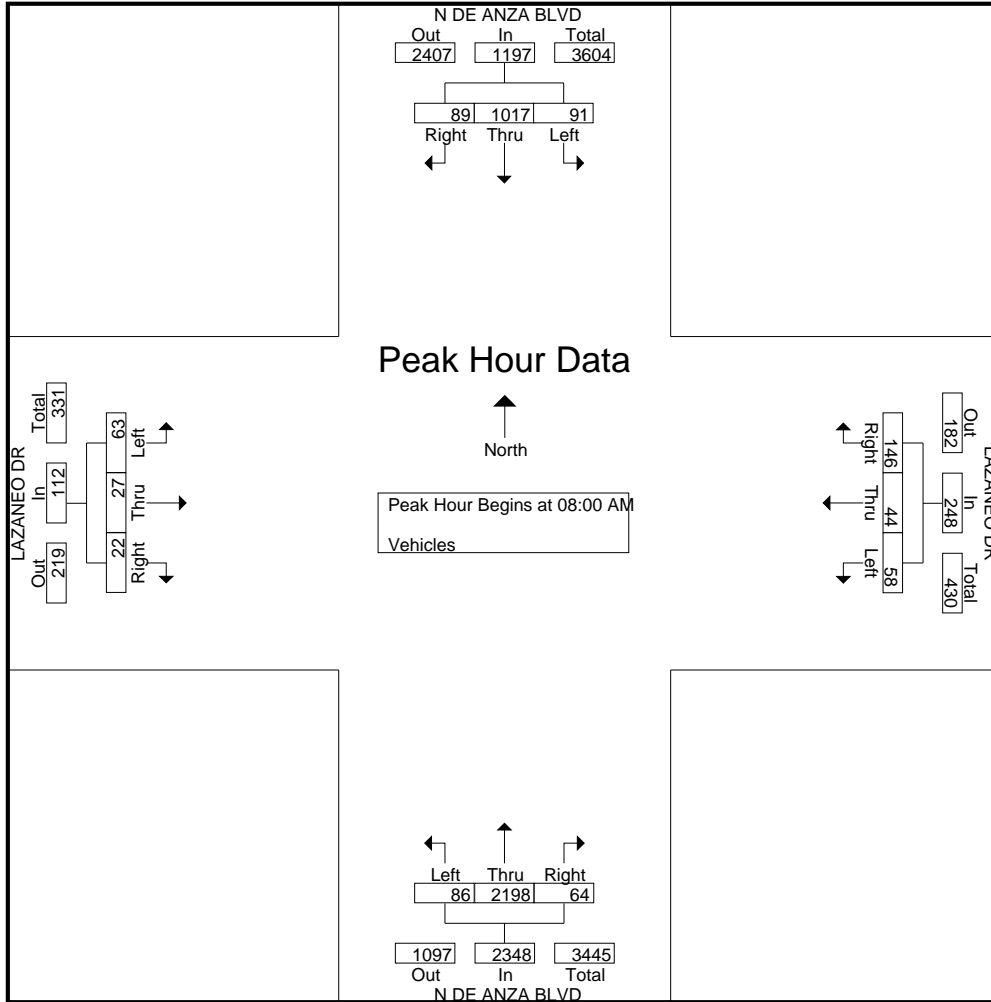

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 2AM FINAL  
 Site Code : 00000002  
 Start Date : 2/23/2016  
 Page No : 1

Groups Printed- Bikes

Start Time	N DE ANZA BLVD Southbound					LAZANEO DR Westbound					N DE ANZA BLVD Northbound					LAZANEO DR Eastbound					Int. Total					
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total						
07:00 AM	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
07:15 AM	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
07:30 AM	0	2	0	0	2	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3
07:45 AM	0	0	0	0	0	1	1	0	0	2	1	1	0	0	2	0	0	0	0	0	0	0	0	0	0	4
<b>Total</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>0</b>	<b>4</b>	<b>1</b>	<b>2</b>	<b>0</b>	<b>0</b>	<b>3</b>	<b>1</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>2</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>9</b>
08:00 AM	0	1	0	0	1	0	1	0	0	1	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	3
08:15 AM	0	2	1	0	3	0	1	0	0	1	0	5	0	0	5	0	0	0	0	0	0	0	0	0	0	9
08:30 AM	2	3	0	0	5	0	3	0	0	3	0	2	0	0	2	0	0	0	0	0	0	0	0	0	0	10
08:45 AM	2	3	0	0	5	0	0	0	0	0	0	4	0	0	4	0	1	0	0	0	0	1	0	0	1	10
<b>Total</b>	<b>4</b>	<b>9</b>	<b>1</b>	<b>0</b>	<b>14</b>	<b>0</b>	<b>5</b>	<b>0</b>	<b>0</b>	<b>5</b>	<b>0</b>	<b>12</b>	<b>0</b>	<b>0</b>	<b>12</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>32</b>
Grand Total	4	13	1	0	18	1	7	0	0	8	1	13	0	0	14	0	1	0	0	1	0	1	0	0	1	41
Apprch %	22.2	72.2	5.6	0		12.5	87.5	0	0		7.1	92.9	0	0		0	100	0	0		0	100	0	0		
Total %	9.8	31.7	2.4	0	43.9	2.4	17.1	0	0	19.5	2.4	31.7	0	0	34.1	0	2.4	0	0	2.4	0	2.4	0	0	2.4	

Start Time	N DE ANZA BLVD Southbound				LAZANEO DR Westbound				N DE ANZA BLVD Northbound				LAZANEO DR Eastbound				Int. Total				
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total					
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 08:00 AM																					
08:00 AM	0	1	0	1	0	1	0	1	0	1	0	1	0	0	0	0	0	0	0	0	3
08:15 AM	0	2	1	3	0	1	0	1	0	5	0	5	0	0	0	0	0	0	0	0	9
08:30 AM	2	3	0	5	0	3	0	3	0	2	0	2	0	0	0	0	0	0	0	0	10
08:45 AM	2	3	0	5	0	0	0	0	0	4	0	4	0	1	0	1	0	1	0	1	10
Total Volume	4	9	1	14	0	5	0	5	0	12	0	12	0	1	0	1	0	1	0	1	32
% App. Total	28.6	64.3	7.1		0	100	0		0	100	0		0	100	0		0	100	0		
PHF	.500	.750	.250	.700	.000	.417	.000	.417	.000	.600	.000	.600	.000	.250	.000	.250	.000	.250	.000	.250	.800

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 2AM FINAL

Site Code : 00000002

Start Date : 2/23/2016

Page No : 2

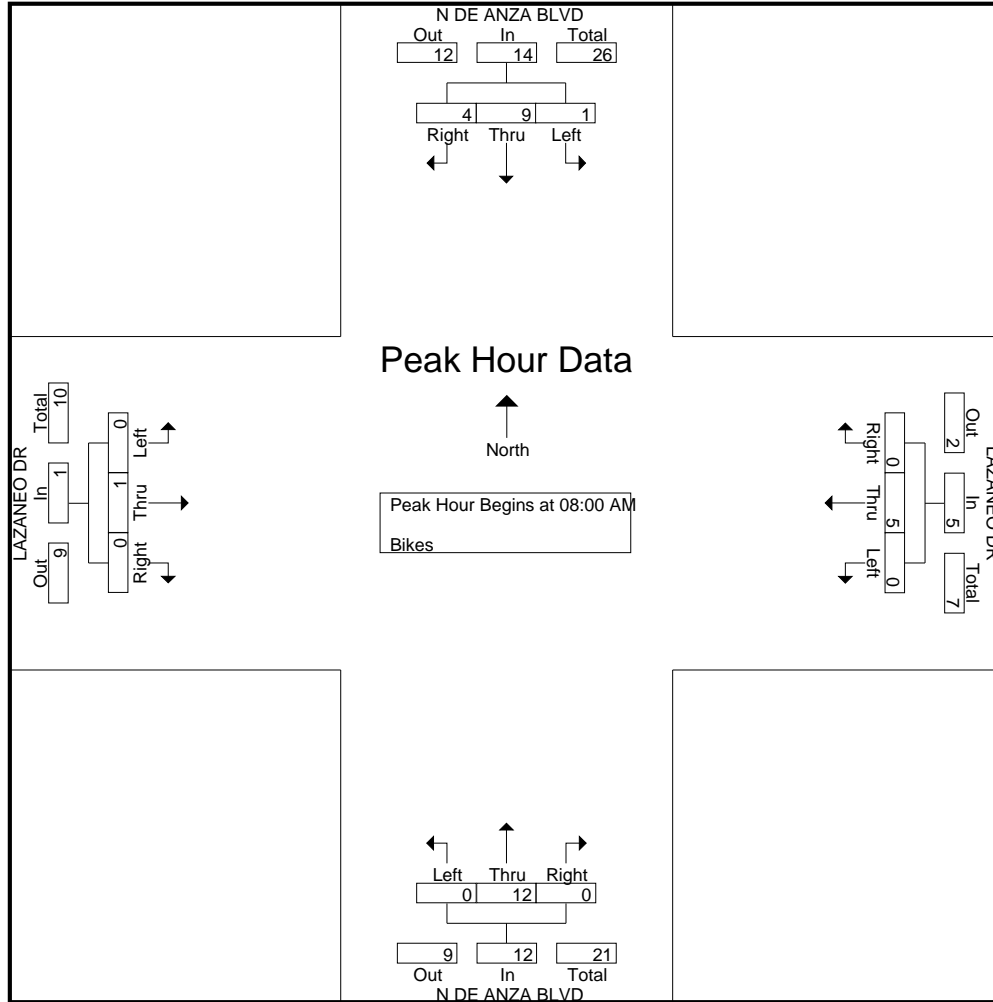

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 2PM FINAL  
 Site Code : 00000002  
 Start Date : 2/23/2016  
 Page No : 1

Groups Printed- Vehicles

Start Time	N DE ANZA BLVD Southbound					LAZANEO DR Westbound					N DE ANZA BLVD Northbound					LAZANEO DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	10	478	15	3	506	16	7	15	17	55	13	276	10	0	299	17	8	25	5	55	915
04:15 PM	8	472	12	1	493	12	8	8	8	36	7	215	9	1	232	18	13	26	3	60	821
04:30 PM	20	575	12	0	607	7	3	4	8	22	14	243	6	0	263	14	9	18	7	48	940
04:45 PM	15	517	14	2	548	15	10	9	10	44	14	270	12	0	296	31	10	34	8	83	971
Total	53	2042	53	6	2154	50	28	36	43	157	48	1004	37	1	1090	80	40	103	23	246	3647
05:00 PM	18	561	11	1	591	10	3	10	12	35	13	315	24	1	353	36	5	41	9	91	1070
05:15 PM	20	668	12	2	702	30	11	11	9	61	10	277	18	1	306	55	16	33	6	110	1179
05:30 PM	10	556	15	0	581	14	6	11	4	35	10	295	10	1	316	51	14	41	2	108	1040
05:45 PM	14	623	24	5	666	10	8	6	15	39	24	315	8	0	347	55	13	44	3	115	1167
Total	62	2408	62	8	2540	64	28	38	40	170	57	1202	60	3	1322	197	48	159	20	424	4456
Grand Total	115	4450	115	14	4694	114	56	74	83	327	105	2206	97	4	2412	277	88	262	43	670	8103
Apprch %	2.4	94.8	2.4	0.3		34.9	17.1	22.6	25.4		4.4	91.5	4	0.2		41.3	13.1	39.1	6.4		
Total %	1.4	54.9	1.4	0.2	57.9	1.4	0.7	0.9	1	4	1.3	27.2	1.2	0	29.8	3.4	1.1	3.2	0.5	8.3	

Start Time	N DE ANZA BLVD Southbound					LAZANEO DR Westbound					N DE ANZA BLVD Northbound					LAZANEO DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 05:00 PM																					
05:00 PM	18	561	11		590	10	3	10		23	13	<b>315</b>	<b>24</b>		<b>352</b>	36	5	41		82	1047
05:15 PM	<b>20</b>	<b>668</b>	12		<b>700</b>	<b>30</b>	<b>11</b>	<b>11</b>		<b>52</b>	10	277	18		305	<b>55</b>	<b>16</b>	33		104	<b>1161</b>
05:30 PM	10	556	15		581	14	6	11		31	10	295	10		315	51	14	41		106	1033
05:45 PM	14	623	<b>24</b>		661	10	8	6		24	<b>24</b>	315	8		347	55	13	<b>44</b>		<b>112</b>	1144
Total Volume	62	2408	62		2532	64	28	38		130	57	1202	60		1319	197	48	159		404	4385
% App. Total	2.4	95.1	2.4			49.2	21.5	29.2			4.3	91.1	4.5			48.8	11.9	39.4			
PHF	.775	.901	.646		.904	.533	.636	.864		.625	.594	.954	.625		.937	.895	.750	.903		.902	.944

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 2PM FINAL

Site Code : 00000002

Start Date : 2/23/2016

Page No : 2

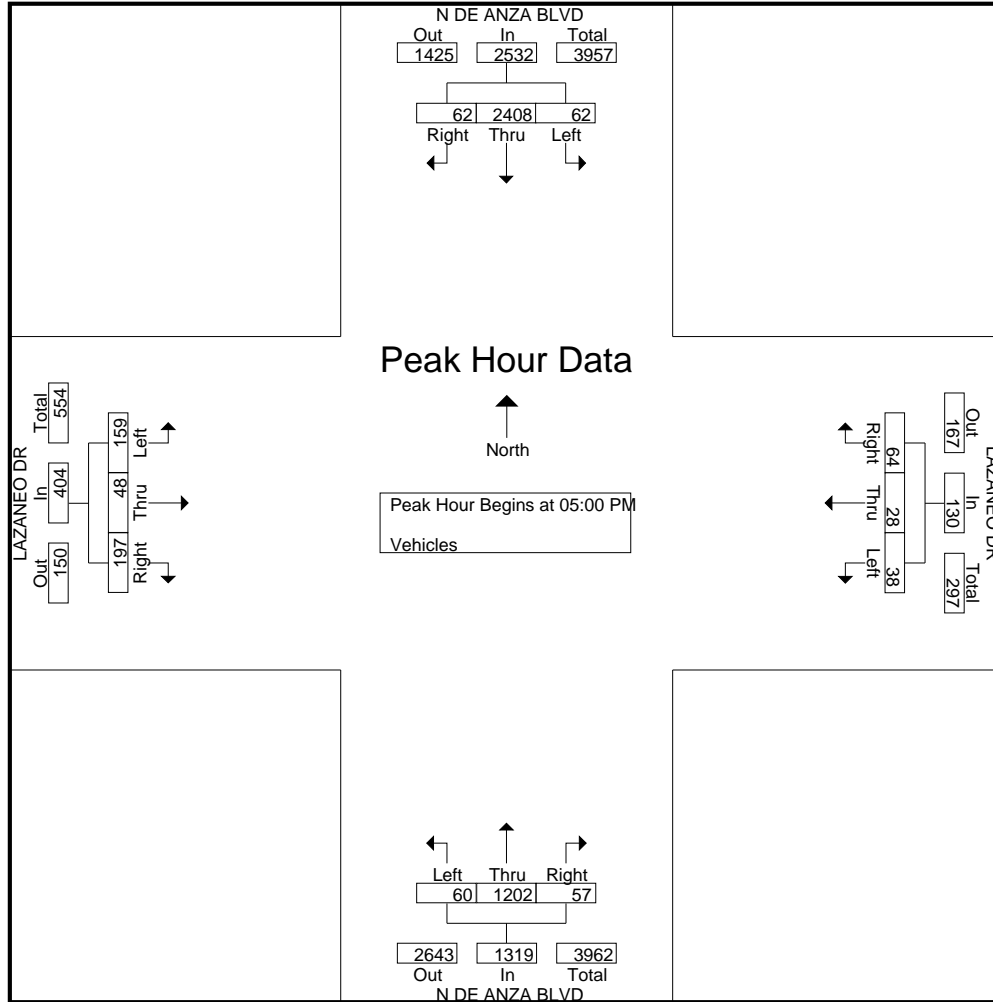



# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 2PM FINAL  
 Site Code : 00000002  
 Start Date : 2/23/2016  
 Page No : 1

Groups Printed- Bikes

Start Time	N DE ANZA BLVD Southbound					LAZANEO DR Westbound					N DE ANZA BLVD Northbound					LAZANEO DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	0	0	1	0	1	0	2	0	0	2	0	1	0	0	1	0	0	1	0	1	5
04:15 PM	0	0	0	0	0	0	1	0	0	1	0	2	0	0	2	0	0	1	0	1	4
04:30 PM	0	1	0	0	1	0	0	0	0	0	0	7	0	0	7	0	1	0	0	1	9
04:45 PM	0	2	0	0	2	0	0	0	0	0	0	3	0	0	3	0	0	2	0	2	7
<b>Total</b>	<b>0</b>	<b>3</b>	<b>1</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>13</b>	<b>0</b>	<b>0</b>	<b>13</b>	<b>0</b>	<b>1</b>	<b>4</b>	<b>0</b>	<b>5</b>	<b>25</b>
05:00 PM	0	0	0	0	0	0	0	0	0	0	0	5	0	0	5	0	1	0	0	1	6
05:15 PM	0	0	0	0	0	1	0	0	0	1	0	2	0	0	2	0	1	0	0	1	4
05:30 PM	0	0	0	0	0	0	0	0	0	0	0	2	0	0	2	0	2	0	0	2	4
05:45 PM	0	0	0	0	0	0	1	1	0	2	0	3	0	0	3	0	0	1	0	1	6
<b>Total</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>12</b>	<b>0</b>	<b>0</b>	<b>12</b>	<b>0</b>	<b>4</b>	<b>1</b>	<b>0</b>	<b>5</b>	<b>20</b>
Grand Total	0	3	1	0	4	1	4	1	0	6	0	25	0	0	25	0	5	5	0	10	45
Apprch %	0	75	25	0		16.7	66.7	16.7	0		0	100	0	0		0	50	50	0		
Total %	0	6.7	2.2	0	8.9	2.2	8.9	2.2	0	13.3	0	55.6	0	0	55.6	0	11.1	11.1	0	22.2	

Start Time	N DE ANZA BLVD Southbound					LAZANEO DR Westbound					N DE ANZA BLVD Northbound					LAZANEO DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 04:15 PM																					
04:15 PM	0	0	0	0	0	0	1	0	0	1	0	2	0	0	2	0	0	1	0	1	4
04:30 PM	0	1	0	0	1	0	0	0	0	0	0	7	0	0	7	0	1	0	0	1	9
04:45 PM	0	2	0	0	2	0	0	0	0	0	0	3	0	0	3	0	0	2	0	2	7
05:00 PM	0	0	0	0	0	0	0	0	0	0	0	5	0	0	5	0	1	0	0	1	6
Total Volume	0	3	0	0	3	0	1	0	0	1	0	17	0	0	17	0	2	3	0	5	26
% App. Total	0	100	0	0		0	100	0	0		0	100	0	0		0	40	60	0		
PHF	.000	.375	.000	.000	.375	.000	.250	.000	.000	.250	.000	.607	.000	.000	.607	.000	.500	.375	.000	.625	.722

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 2PM FINAL

Site Code : 00000002

Start Date : 2/23/2016

Page No : 2

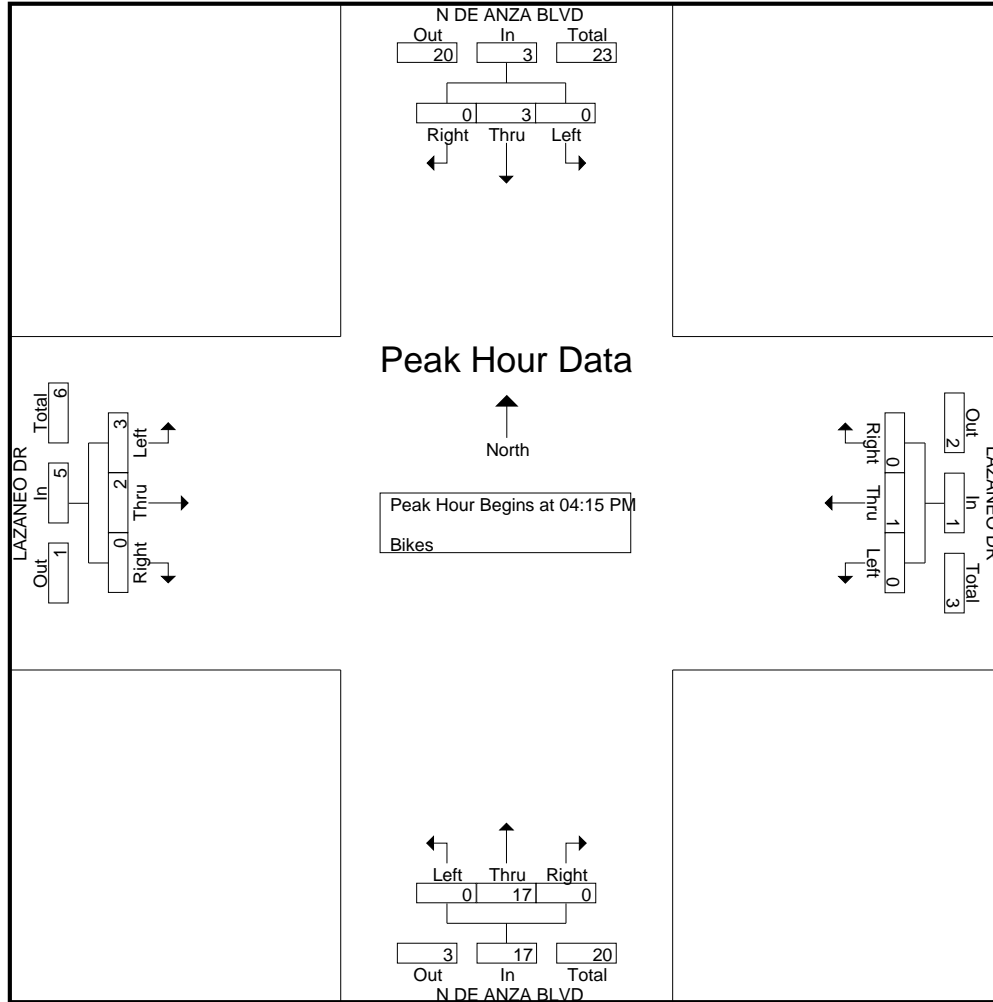

# Traffic Data Service

Campbell, CA  
(408) 377-2988  
tdsbay@cs.com

File Name : 3AM FINAL  
Site Code : 00000003  
Start Date : 2/23/2016  
Page No : 1

Groups Printed- Vehicles

Start Time	BANDLEY DR Southbound					ALVES DR Westbound					BANDLEY DR Northbound					ALVES DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
07:00 AM	8	2	2	4	16	2	10	1	0	13	0	6	2	0	8	5	5	17	1	28	65
07:15 AM	16	9	1	1	27	2	10	2	0	14	2	15	4	1	22	0	7	14	1	22	85
07:30 AM	3	3	2	4	12	3	6	0	0	9	1	26	3	1	31	3	9	17	3	32	84
07:45 AM	10	8	3	1	22	1	19	2	1	23	2	23	10	3	38	8	9	34	2	53	136
<b>Total</b>	<b>37</b>	<b>22</b>	<b>8</b>	<b>10</b>	<b>77</b>	<b>8</b>	<b>45</b>	<b>5</b>	<b>1</b>	<b>59</b>	<b>5</b>	<b>70</b>	<b>19</b>	<b>5</b>	<b>99</b>	<b>16</b>	<b>30</b>	<b>82</b>	<b>7</b>	<b>135</b>	<b>370</b>
08:00 AM	23	17	2	2	44	3	15	2	1	21	2	31	7	1	41	9	20	40	4	73	179
08:15 AM	13	20	2	0	35	3	12	3	1	19	1	37	11	0	49	4	16	30	1	51	154
08:30 AM	10	10	1	5	26	10	14	2	3	29	0	75	12	1	88	6	8	36	4	54	197
08:45 AM	18	18	2	3	41	4	12	0	0	16	1	67	8	0	76	8	20	40	3	71	204
<b>Total</b>	<b>64</b>	<b>65</b>	<b>7</b>	<b>10</b>	<b>146</b>	<b>20</b>	<b>53</b>	<b>7</b>	<b>5</b>	<b>85</b>	<b>4</b>	<b>210</b>	<b>38</b>	<b>2</b>	<b>254</b>	<b>27</b>	<b>64</b>	<b>146</b>	<b>12</b>	<b>249</b>	<b>734</b>
Grand Total	101	87	15	20	223	28	98	12	6	144	9	280	57	7	353	43	94	228	19	384	1104
Apprch %	45.3	39	6.7	9		19.4	68.1	8.3	4.2		2.5	79.3	16.1	2		11.2	24.5	59.4	4.9		
Total %	9.1	7.9	1.4	1.8	20.2	2.5	8.9	1.1	0.5	13	0.8	25.4	5.2	0.6	32	3.9	8.5	20.7	1.7	34.8	

Start Time	BANDLEY DR Southbound				App. Total	ALVES DR Westbound				App. Total	BANDLEY DR Northbound				App. Total	ALVES DR Eastbound				App. Total	Int. Total
	Right	Thru	Left	Peds		Right	Thru	Left	Peds		Right	Thru	Left	Peds		Right	Thru	Left	Peds		
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 08:00 AM																					
08:00 AM	<b>23</b>	17	2	<b>42</b>		3	<b>15</b>	2	20		2	31	7	40		9	<b>20</b>	<b>40</b>	<b>69</b>		171
08:15 AM	13	<b>20</b>	2	35		3	12	<b>3</b>	18		1	37	11	49		4	16	30	50		152
08:30 AM	10	10	1	21		<b>10</b>	14	2	<b>26</b>		0	<b>75</b>	<b>12</b>	<b>87</b>		6	8	36	50		184
08:45 AM	18	18	2	38		4	12	0	16		1	67	8	76		8	20	40	68		<b>198</b>
Total Volume	64	65	7	136		20	53	7	80		4	210	38	252		27	64	146	237		705
% App. Total	47.1	47.8	5.1			25	66.2	8.8			1.6	83.3	15.1			11.4	27	61.6			
PHF	.696	.813	.875	.810		.500	.883	.583	.769		.500	.700	.792	.724		.750	.800	.913	.859		.890

# Traffic Data Service


Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 3AM FINAL

Site Code : 00000003

Start Date : 2/23/2016

Page No : 2

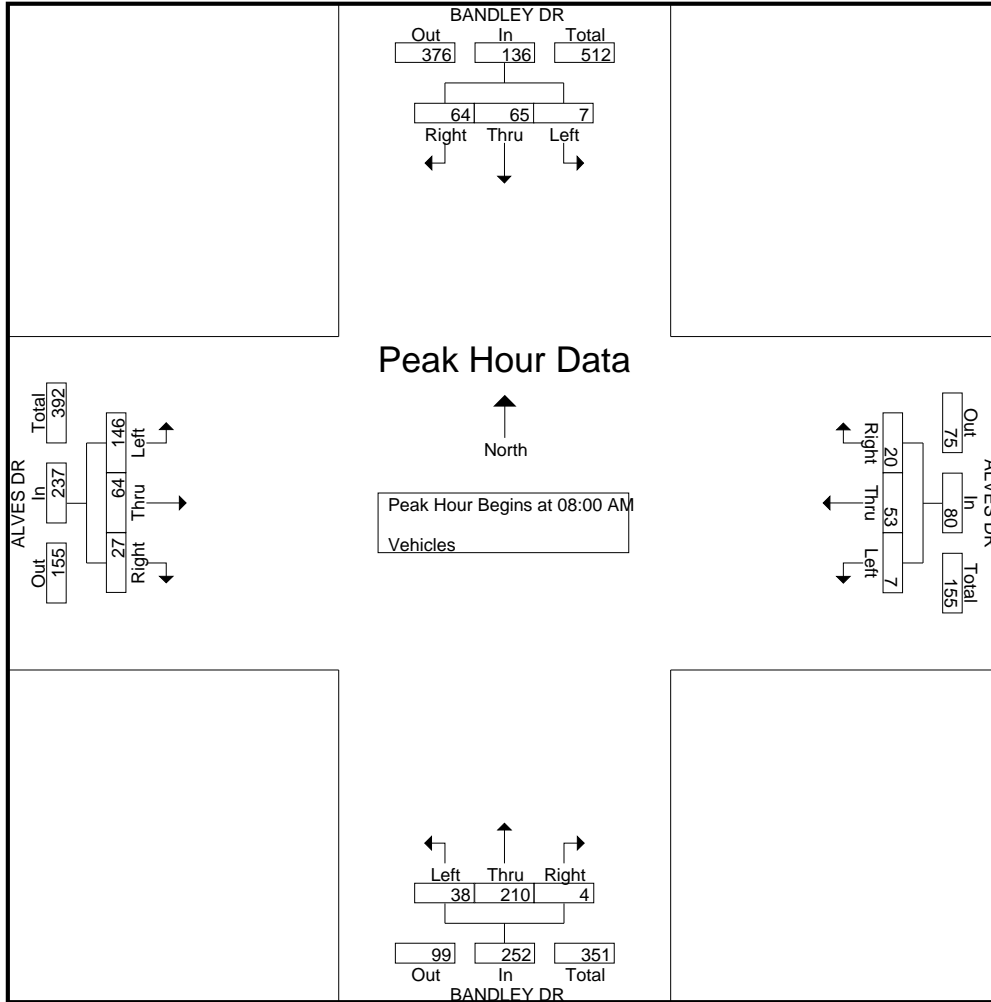

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 3AM FINAL  
 Site Code : 00000003  
 Start Date : 2/23/2016  
 Page No : 1

Groups Printed- Bikes

Start Time	BANDLEY DR Southbound					ALVES DR Westbound					BANDLEY DR Northbound					ALVES DR Eastbound					Int. Total	
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total		
07:00 AM	0	2	0	0	2	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	3
07:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	0	1
07:30 AM	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	0	0	1	0	1	0	2
07:45 AM	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	0	0	2	0	2	0	3
<b>Total</b>	<b>0</b>	<b>2</b>	<b>0</b>	<b>0</b>	<b>2</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>1</b>	<b>3</b>	<b>0</b>	<b>4</b>	<b>9</b>	
08:00 AM	1	2	0	0	3	0	0	0	0	0	0	0	0	0	0	0	1	1	0	2	0	5
08:15 AM	1	0	0	0	1	0	1	0	0	1	0	3	0	0	3	0	1	0	0	1	0	6
08:30 AM	2	1	0	0	3	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	4
08:45 AM	3	0	0	0	3	0	0	0	0	0	0	2	0	0	2	0	0	2	0	2	0	7
<b>Total</b>	<b>7</b>	<b>3</b>	<b>0</b>	<b>0</b>	<b>10</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>5</b>	<b>0</b>	<b>0</b>	<b>5</b>	<b>0</b>	<b>2</b>	<b>4</b>	<b>0</b>	<b>6</b>	<b>22</b>	
Grand Total	7	5	0	0	12	0	1	0	0	1	0	8	0	0	8	0	3	7	0	10	31	
Apprch %	58.3	41.7	0	0		0	100	0	0		0	100	0	0		0	30	70	0			
Total %	22.6	16.1	0	0	38.7	0	3.2	0	0	3.2	0	25.8	0	0	25.8	0	9.7	22.6	0	32.3		

Start Time	BANDLEY DR Southbound				ALVES DR Westbound				BANDLEY DR Northbound				ALVES DR Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 08:00 AM																	
08:00 AM	1	2	0	3	0	0	0	0	0	0	0	0	0	1	1	2	5
08:15 AM	1	0	0	1	0	1	0	1	0	3	0	3	0	1	0	1	6
08:30 AM	2	1	0	3	0	0	0	0	0	0	0	0	0	0	1	1	4
08:45 AM	3	0	0	3	0	0	0	0	0	2	0	2	0	0	2	2	7
Total Volume	7	3	0	10	0	1	0	1	0	5	0	5	0	2	4	6	22
% App. Total	70	30	0		0	100	0		0	100	0		0	33.3	66.7		
PHF	.583	.375	.000	.833	.000	.250	.000	.250	.000	.417	.000	.417	.000	.500	.500	.750	.786

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 3AM FINAL

Site Code : 00000003

Start Date : 2/23/2016

Page No : 2

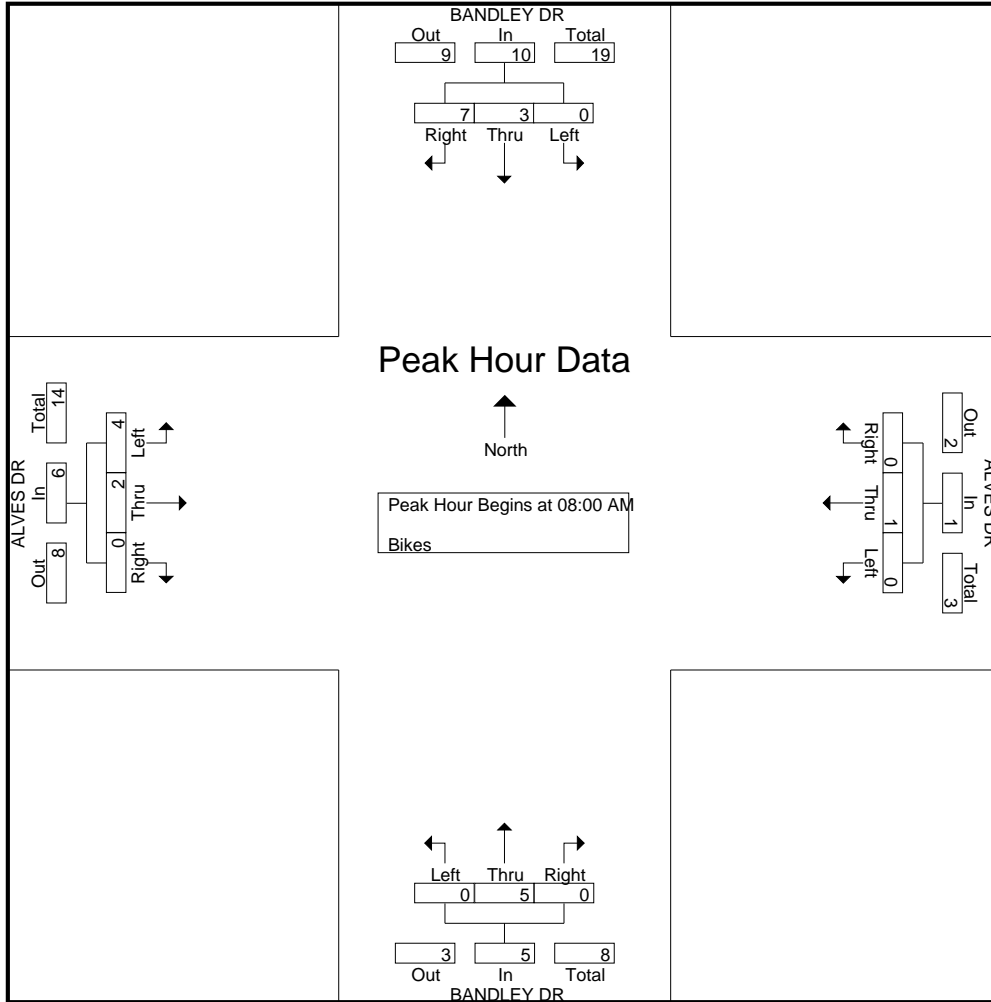

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 3PM FINAL  
 Site Code : 00000003  
 Start Date : 2/23/2016  
 Page No : 1

## Groups Printed- Vehicles

Start Time	BANDLEY DR Southbound					ALVES DR Westbound					BANDLEY DR Northbound					ALVES DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	16	11	2	4	33	6	11	5	11	33	2	40	15	3	60	9	14	28	6	57	183
04:15 PM	16	16	6	7	45	2	7	4	4	17	4	25	18	6	53	10	24	25	7	66	181
04:30 PM	18	25	3	1	47	3	14	2	6	25	1	31	23	6	61	4	11	19	4	38	171
04:45 PM	18	33	5	8	64	8	21	11	5	45	5	44	15	4	68	12	25	29	4	70	247
Total	68	85	16	20	189	19	53	22	26	120	12	140	71	19	242	35	74	101	21	231	782
05:00 PM	22	28	12	12	74	8	24	3	4	39	4	36	15	2	57	12	11	26	1	50	220
05:15 PM	25	27	8	9	69	11	20	3	0	34	4	50	17	6	77	7	15	39	2	63	243
05:30 PM	26	34	10	6	76	7	16	9	5	37	4	45	18	2	69	16	18	26	0	60	242
05:45 PM	17	33	6	5	61	4	27	10	1	42	6	40	19	2	67	11	18	32	5	66	236
Total	90	122	36	32	280	30	87	25	10	152	18	171	69	12	270	46	62	123	8	239	941
Grand Total	158	207	52	52	469	49	140	47	36	272	30	311	140	31	512	81	136	224	29	470	1723
Apprch %	33.7	44.1	11.1	11.1		18	51.5	17.3	13.2		5.9	60.7	27.3	6.1		17.2	28.9	47.7	6.2		
Total %	9.2	12	3	3	27.2	2.8	8.1	2.7	2.1	15.8	1.7	18	8.1	1.8	29.7	4.7	7.9	13	1.7	27.3	

Start Time	BANDLEY DR Southbound					ALVES DR Westbound					BANDLEY DR Northbound					ALVES DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 04:45 PM																					
04:45 PM	18	33	5	56	8	21	11	40	5	44	15	64	12	25	29	66	226				
05:00 PM	22	28	12	62	8	24	3	35	4	36	15	55	12	11	26	49	201				
05:15 PM	25	27	8	60	11	20	3	34	4	50	17	71	7	15	39	61	226				
05:30 PM	26	34	10	70	7	16	9	32	4	45	18	67	16	18	26	60	229				
Total Volume	91	122	35	248	34	81	26	141	17	175	65	257	47	69	120	236	882				
% App. Total	36.7	49.2	14.1		24.1	57.4	18.4		6.6	68.1	25.3		19.9	29.2	50.8						
PHF	.875	.897	.729	.886	.773	.844	.591	.881	.850	.875	.903	.905	.734	.690	.769	.894	.963				

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*tdsbay@cs.com*

File Name : 3PM FINAL

Site Code : 00000003

Start Date : 2/23/2016

Page No : 2

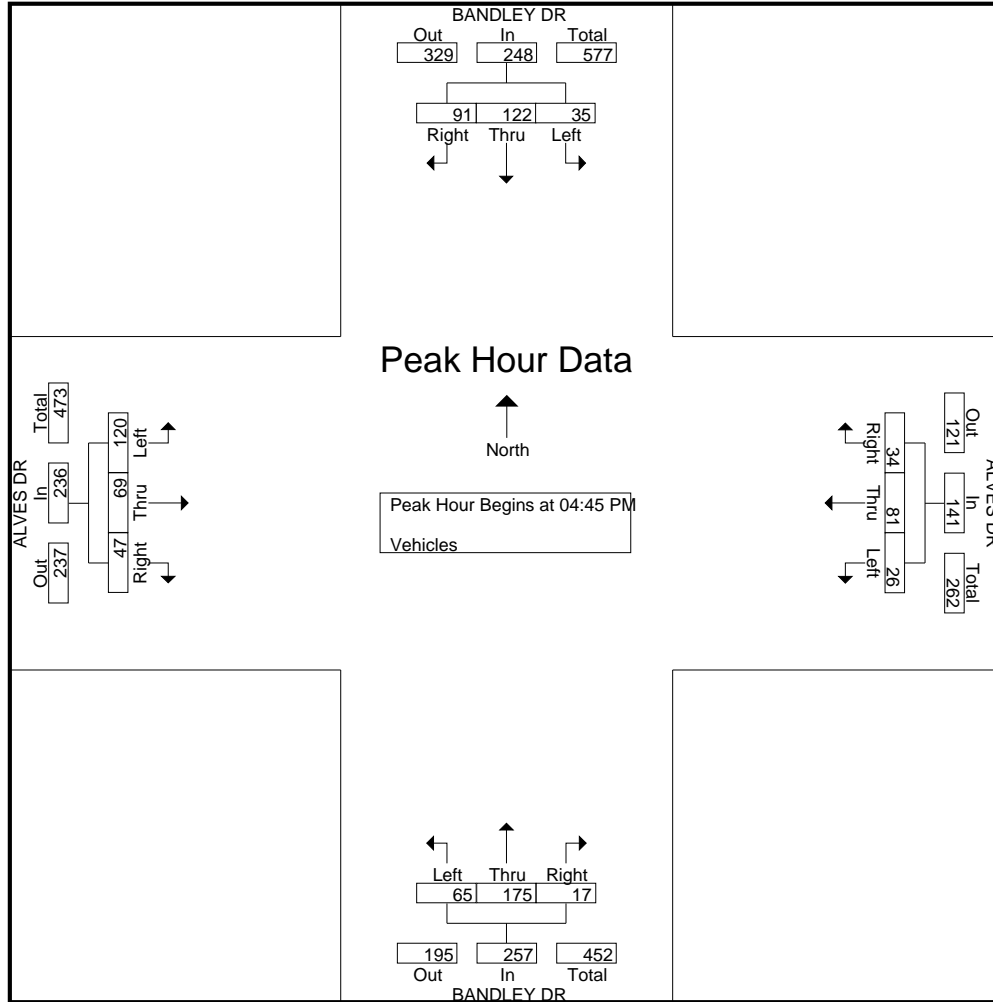



# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 3PM FINAL  
 Site Code : 00000003  
 Start Date : 2/23/2016  
 Page No : 1

Groups Printed- Bikes

Start Time	BANDLEY DR Southbound					ALVES DR Westbound					BANDLEY DR Northbound					ALVES DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	1	0	0	0	1	0	0	0	0	0	0	2	0	0	2	1	0	2	0	3	6
04:15 PM	1	1	0	0	2	0	0	0	0	0	0	1	1	0	2	0	0	2	0	2	6
04:30 PM	2	0	1	0	3	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	4
04:45 PM	2	0	0	0	2	0	1	0	0	1	0	0	0	0	0	0	0	1	0	1	4
Total	6	1	1	0	8	0	1	0	0	1	0	4	1	0	5	1	0	5	0	6	20
05:00 PM	0	2	0	0	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2
05:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	2
05:30 PM	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
05:45 PM	5	0	0	0	5	0	0	0	0	0	0	0	0	0	0	0	0	3	0	3	8
Total	6	2	0	0	8	0	0	0	0	0	0	0	0	0	0	0	0	5	0	5	13
Grand Total	12	3	1	0	16	0	1	0	0	1	0	4	1	0	5	1	0	10	0	11	33
Apprch %	75	18.8	6.2	0		0	100	0	0		0	80	20	0		9.1	0	90.9	0		
Total %	36.4	9.1	3	0	48.5	0	3	0	0	3	0	12.1	3	0	15.2	3	0	30.3	0	33.3	

Start Time	BANDLEY DR Southbound				ALVES DR Westbound				BANDLEY DR Northbound				ALVES DR Eastbound				Int. Total	
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total		
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																		
Peak Hour for Entire Intersection Begins at 04:00 PM																		
04:00 PM	1	0	0	1	0	0	0	0	0	0	2	0	2	1	0	2	3	6
04:15 PM	1	1	0	2	0	0	0	0	0	0	1	1	2	0	0	2	2	6
04:30 PM	2	0	1	3	0	0	0	0	0	0	1	0	1	0	0	0	0	4
04:45 PM	2	0	0	2	0	1	0	1	0	0	0	0	0	0	0	1	1	4
Total Volume	6	1	1	8	0	1	0	1	0	0	4	1	5	1	0	5	6	20
% App. Total	75	12.5	12.5		0	100	0		0	80	20			16.7	0	83.3		
PHF	.750	.250	.250	.667	.000	.250	.000	.250	.000	.500	.250	.625	.250	.000	.625	.500	.833	

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 3PM FINAL

Site Code : 00000003

Start Date : 2/23/2016

Page No : 2

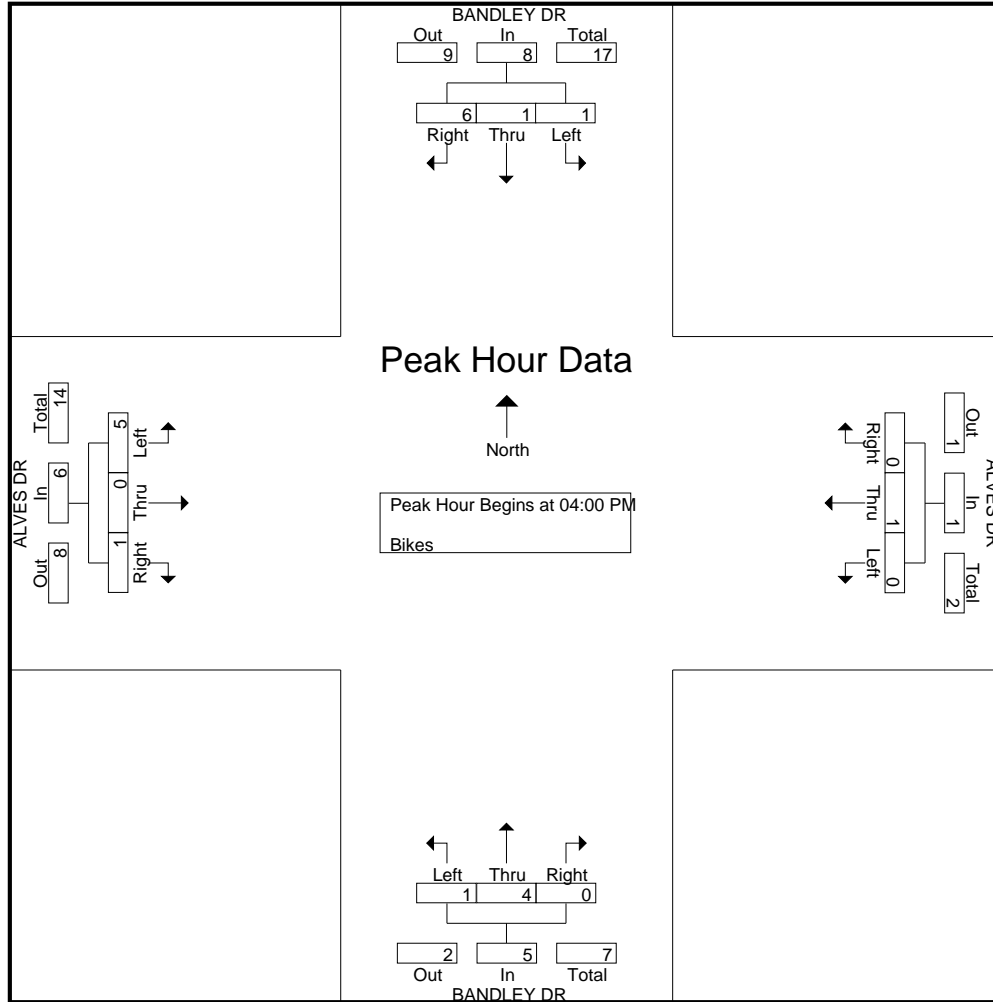

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 4AM FINAL  
 Site Code : 00000004  
 Start Date : 2/23/2016  
 Page No : 1

## Groups Printed- Vehicles

Start Time	N DE ANZA BLVD Southbound					Westbound					N DE ANZA BLVD Northbound					ALVES DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
07:00 AM	13	133	0	0	146	0	0	0	0	0	0	237	0	0	237	10	0	0	3	13	396
07:15 AM	12	154	0	0	166	0	0	0	0	0	0	347	0	0	347	10	0	0	5	15	528
07:30 AM	9	141	0	0	150	0	0	0	0	0	0	426	0	0	426	13	0	0	10	23	599
07:45 AM	18	191	0	0	209	0	0	0	0	0	0	576	0	0	576	13	0	0	2	15	800
Total	52	619	0	0	671	0	0	0	0	0	0	1586	0	0	1586	46	0	0	20	66	2323
08:00 AM	18	312	0	0	330	0	0	0	0	0	0	538	0	0	538	26	0	0	1	27	895
08:15 AM	17	293	0	0	310	0	0	0	0	0	0	585	0	0	585	25	0	0	5	30	925
08:30 AM	19	196	0	0	215	0	0	0	0	0	0	629	0	0	629	13	0	0	5	18	862
08:45 AM	18	252	0	0	270	0	0	0	0	0	0	563	0	0	563	22	0	0	3	25	858
Total	72	1053	0	0	1125	0	0	0	0	0	0	2315	0	0	2315	86	0	0	14	100	3540
Grand Total	124	1672	0	0	1796	0	0	0	0	0	0	3901	0	0	3901	132	0	0	34	166	5863
Apprch %	6.9	93.1	0	0		0	0	0	0	0	0	100	0	0		79.5	0	0	20.5		
Total %	2.1	28.5	0	0	30.6	0	0	0	0	0	0	66.5	0	0	66.5	2.3	0	0	0.6	2.8	

Start Time	N DE ANZA BLVD Southbound				Westbound				N DE ANZA BLVD Northbound				ALVES DR Eastbound				Int. Total	
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total		
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																		
Peak Hour for Entire Intersection Begins at 08:00 AM																		
08:00 AM	18	<b>312</b>	0	<b>330</b>	0	0	0	0	0	0	538	0	538	<b>26</b>	0	0	<b>26</b>	894
08:15 AM	17	293	0	310	0	0	0	0	0	0	585	0	585	25	0	0	25	<b>920</b>
08:30 AM	<b>19</b>	196	0	215	0	0	0	0	0	0	<b>629</b>	0	<b>629</b>	13	0	0	13	857
08:45 AM	18	252	0	270	0	0	0	0	0	0	563	0	563	22	0	0	22	855
Total Volume	72	1053	0	1125	0	0	0	0	0	0	2315	0	2315	86	0	0	86	3526
% App. Total	6.4	93.6	0		0	0	0		0	0	100	0		100	0	0		
PHF	.947	.844	.000	.852	.000	.000	.000	.000	.000	.000	.920	.000	.920	.827	.000	.000	.827	.958

# Traffic Data Service


Campbell, CA  
 (408) 377-2988  
*idsbay@cs.com*

File Name : 4AM FINAL

Site Code : 00000004

Start Date : 2/23/2016

Page No : 2

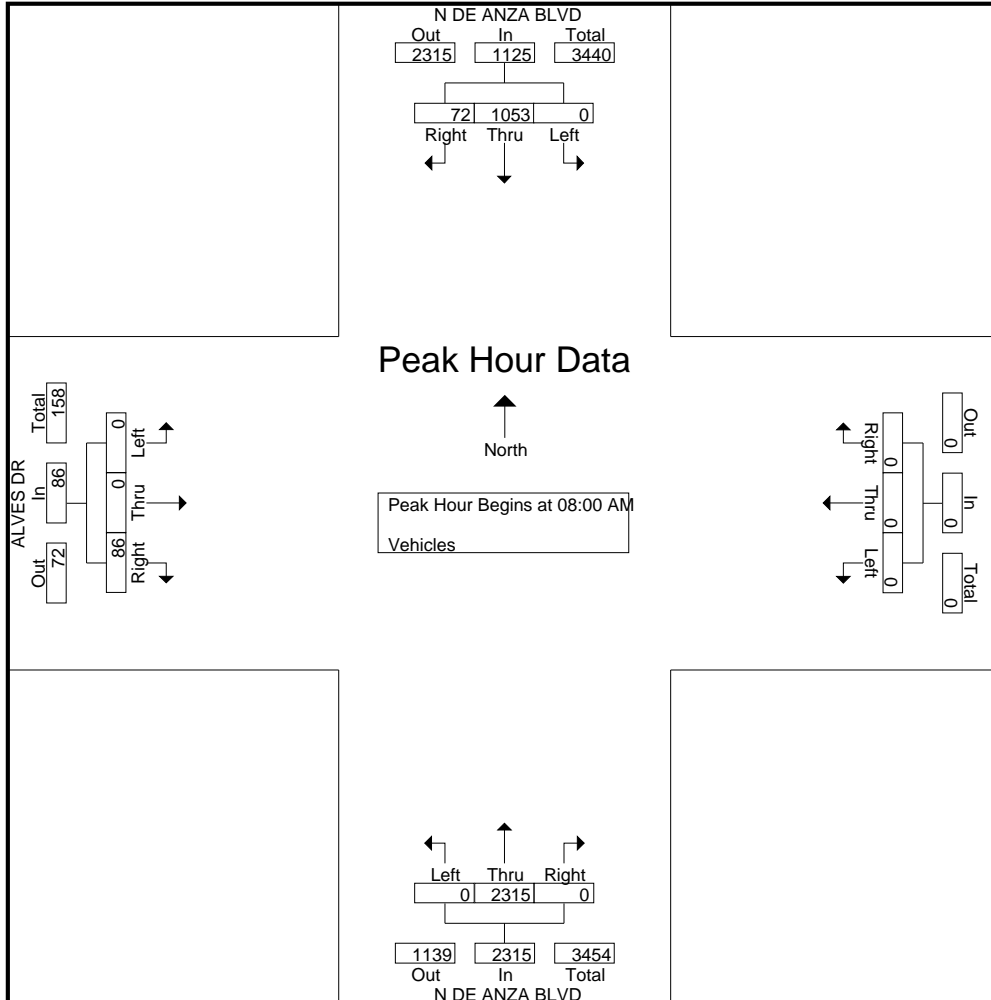

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 4AM FINAL  
 Site Code : 00000004  
 Start Date : 2/23/2016  
 Page No : 1

Groups Printed- Bikes

Start Time	N DE ANZA BLVD Southbound					Westbound					N DE ANZA BLVD Northbound					ALVES DR Eastbound					Int. Total					
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total						
07:00 AM	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
07:15 AM	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	2
07:30 AM	0	2	0	0	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2
07:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Total</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>5</b>
08:00 AM	0	2	0	0	2	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	3
08:15 AM	1	2	0	0	3	0	0	0	0	0	0	2	0	0	2	0	0	0	0	0	0	0	0	0	0	5
08:30 AM	0	4	0	0	4	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	1	5
08:45 AM	0	3	0	0	3	0	0	0	0	0	0	5	0	0	5	0	0	0	0	0	0	0	0	0	0	8
<b>Total</b>	<b>1</b>	<b>11</b>	<b>0</b>	<b>0</b>	<b>12</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>8</b>	<b>0</b>	<b>0</b>	<b>8</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>21</b>
Grand Total	1	15	0	0	16	0	0	0	0	0	0	8	0	0	8	2	0	0	0	0	2	0	0	0	2	26
Apprch %	6.2	93.8	0	0		0	0	0	0		0	100	0	0		100	0	0	0							
Total %	3.8	57.7	0	0	61.5	0	0	0	0	0	0	30.8	0	0	30.8	7.7	0	0	0	7.7						

Start Time	N DE ANZA BLVD Southbound					Westbound					N DE ANZA BLVD Northbound					ALVES DR Eastbound					Int. Total					
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total						
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																										
Peak Hour for Entire Intersection Begins at 08:00 AM																										
08:00 AM	0	2	0	0	2	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	3
08:15 AM	1	2	0	0	3	0	0	0	0	0	0	2	0	0	2	0	0	0	0	0	0	0	0	0	0	5
08:30 AM	0	4	0	0	4	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	1	5
08:45 AM	0	3	0	0	3	0	0	0	0	0	0	5	0	0	5	0	0	0	0	0	0	0	0	0	0	8
Total Volume	1	11	0	0	12	0	0	0	0	0	0	8	0	0	8	1	0	0	0	0	0	0	0	0	1	21
% App. Total	8.3	91.7	0	0		0	0	0	0		0	100	0	0		100	0	0	0							
PHF	.250	.688	.000	.750		.000	.000	.000	.000		.000	.400	.000	.400		.250	.000	.000	.250						.656	

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 4AM FINAL

Site Code : 00000004

Start Date : 2/23/2016

Page No : 2

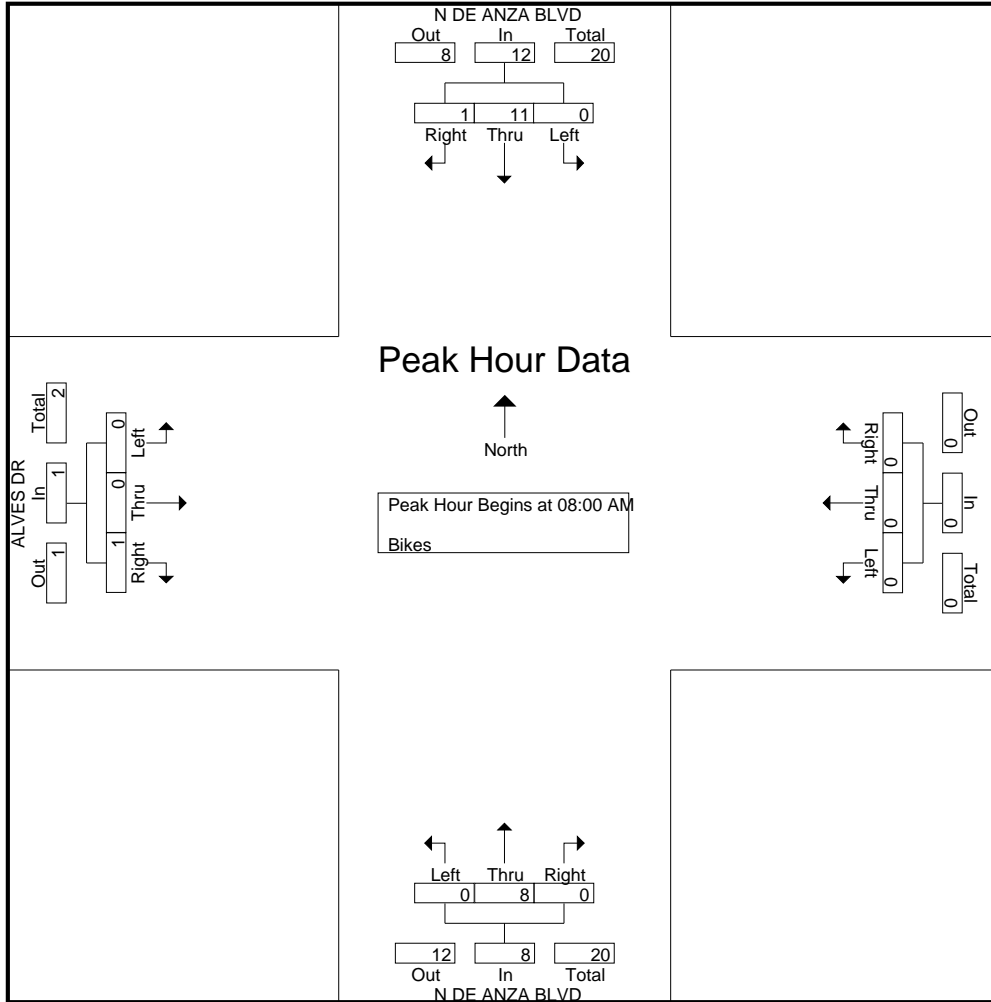

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 4PM FINAL  
 Site Code : 00000004  
 Start Date : 2/23/2016  
 Page No : 1

## Groups Printed- Vehicles

Start Time	N DE ANZA BLVD Southbound					Westbound					N DE ANZA BLVD Northbound					ALVES DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	18	467	0	0	485	0	0	0	0	0	0	286	0	0	286	16	0	0	1	17	788
04:15 PM	13	522	0	0	535	0	0	0	0	0	0	235	0	0	235	30	0	0	2	32	802
04:30 PM	22	552	0	0	574	0	0	0	0	0	0	273	0	0	273	15	0	0	4	19	866
04:45 PM	43	517	0	0	560	0	0	0	0	0	0	282	0	0	282	31	0	0	10	41	883
<b>Total</b>	<b>96</b>	<b>2058</b>	<b>0</b>	<b>0</b>	<b>2154</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1076</b>	<b>0</b>	<b>0</b>	<b>1076</b>	<b>92</b>	<b>0</b>	<b>0</b>	<b>17</b>	<b>109</b>	<b>3339</b>
05:00 PM	36	637	0	0	673	0	0	0	0	0	0	371	0	0	371	36	0	0	3	39	1083
05:15 PM	41	675	0	0	716	0	0	0	0	0	0	295	0	0	295	27	0	0	7	34	1045
05:30 PM	40	656	0	0	696	0	0	0	0	0	0	342	0	0	342	30	0	0	6	36	1074
05:45 PM	35	607	0	0	642	0	0	0	0	0	0	342	0	0	342	34	0	0	2	36	1020
<b>Total</b>	<b>152</b>	<b>2575</b>	<b>0</b>	<b>0</b>	<b>2727</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1350</b>	<b>0</b>	<b>0</b>	<b>1350</b>	<b>127</b>	<b>0</b>	<b>0</b>	<b>18</b>	<b>145</b>	<b>4222</b>
Grand Total	248	4633	0	0	4881	0	0	0	0	0	0	2426	0	0	2426	219	0	0	35	254	7561
Apprch %	5.1	94.9	0	0		0	0	0	0	0	0	100	0	0		86.2	0	0	13.8		
Total %	3.3	61.3	0	0	64.6	0	0	0	0	0	0	32.1	0	0	32.1	2.9	0	0	0.5	3.4	

Start Time	N DE ANZA BLVD Southbound					Westbound					N DE ANZA BLVD Northbound					ALVES DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 05:00 PM																					
05:00 PM	36	637	0	0	673	0	0	0	0	0	0	371	0	0	371	36	0	0	3	39	1083
05:15 PM	41	675	0	0	716	0	0	0	0	0	0	295	0	0	295	27	0	0	7	34	1038
05:30 PM	40	656	0	0	696	0	0	0	0	0	0	342	0	0	342	30	0	0	6	36	1068
05:45 PM	35	607	0	0	642	0	0	0	0	0	0	342	0	0	342	34	0	0	2	36	1018
Total Volume	152	2575	0	0	2727	0	0	0	0	0	0	1350	0	0	1350	127	0	0	18	145	4204
% App. Total	5.6	94.4	0	0		0	0	0	0	0	0	100	0	0		100	0	0			
PHF	.927	.954	.000	.952		.000	.000	.000	.000	.000	.000	.910	.000	.910		.882	.000	.000	.882		.973

# Traffic Data Service


Campbell, CA  
 (408) 377-2988  
*tdsbay@cs.com*

File Name : 4PM FINAL

Site Code : 00000004

Start Date : 2/23/2016

Page No : 2

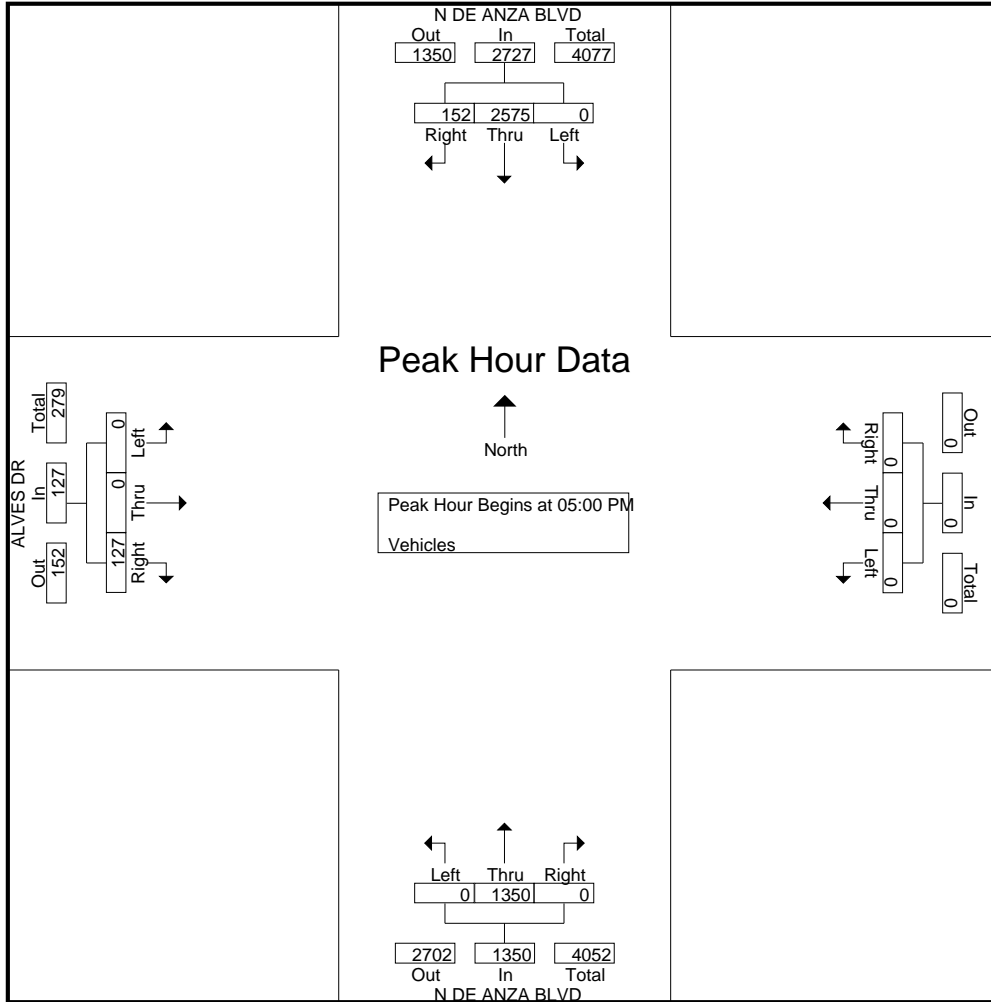



# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 4PM FINAL  
 Site Code : 00000004  
 Start Date : 2/23/2016  
 Page No : 1

Groups Printed- Bikes

Start Time	N DE ANZA BLVD Southbound					Westbound					N DE ANZA BLVD Northbound					ALVES DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	0	3	0	0	3	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	4
04:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
04:30 PM	0	1	0	0	1	0	0	0	0	0	0	5	0	0	5	1	0	0	0	1	7
04:45 PM	0	1	0	0	1	0	0	0	0	0	0	4	0	0	4	0	0	0	0	0	5
Total	0	5	0	0	5	0	0	0	0	0	0	10	0	0	10	1	0	0	0	1	16
05:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
05:15 PM	0	3	0	0	3	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	4
05:30 PM	0	3	0	0	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3
05:45 PM	0	1	0	0	1	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	2
Total	0	7	0	0	7	0	0	0	0	0	0	2	0	0	2	0	0	0	0	0	9
Grand Total	0	12	0	0	12	0	0	0	0	0	0	12	0	0	12	1	0	0	0	1	25
Apprch %	0	100	0	0		0	0	0	0		0	100	0	0		100	0	0	0		
Total %	0	48	0	0	48	0	0	0	0	0	0	48	0	0	48	4	0	0	0	4	

Start Time	N DE ANZA BLVD Southbound					Westbound					N DE ANZA BLVD Northbound					ALVES DR Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 04:00 PM																					
04:00 PM	0	3	0	0	3	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	4
04:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
04:30 PM	0	1	0	0	1	0	0	0	0	0	0	5	0	0	5	1	0	0	0	1	7
04:45 PM	0	1	0	0	1	0	0	0	0	0	0	4	0	0	4	0	0	0	0	0	5
Total Volume	0	5	0	0	5	0	0	0	0	0	0	10	0	0	10	1	0	0	0	1	16
% App. Total	0	100	0	0		0	0	0	0		0	100	0	0		100	0	0	0		
PHF	.000	.417	.000	.000	.417	.000	.000	.000	.000	.000	.000	.500	.000	.000	.500	.250	.000	.000	.000	.250	.571

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 4PM FINAL

Site Code : 00000004

Start Date : 2/23/2016

Page No : 2

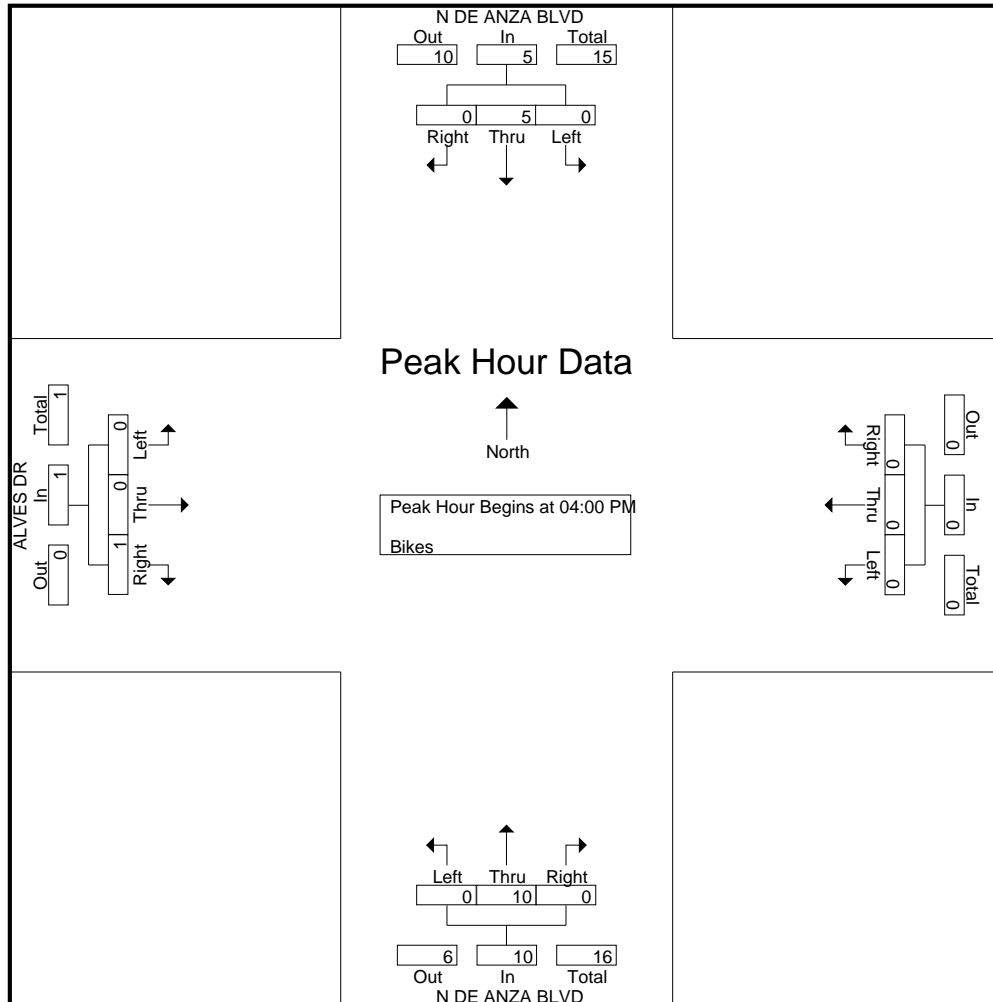

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 5AM FINAL  
 Site Code : 00000005  
 Start Date : 2/23/2016  
 Page No : 1

## Groups Printed- Vehicles

Start Time	MARY AVE Southbound					STEVENS CREEK BLVD Westbound					MARY AVE Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
07:00 AM	40	2	11	3	56	11	143	15	9	178	1	0	9	0	10	21	70	18	0	109	353
07:15 AM	73	6	5	5	89	17	225	42	11	295	5	1	7	0	13	33	106	34	0	173	570
07:30 AM	37	3	10	1	51	24	186	37	1	248	2	1	16	0	19	17	145	57	0	219	537
07:45 AM	63	3	42	3	111	36	181	30	7	254	4	1	13	3	21	27	118	19	0	164	550
Total	213	14	68	12	307	88	735	124	28	975	12	3	45	3	63	98	439	128	0	665	2010
08:00 AM	63	5	21	14	103	53	191	40	6	290	4	0	16	0	20	29	153	24	0	206	619
08:15 AM	52	14	20	18	104	60	225	88	36	409	5	4	19	0	28	38	157	33	0	228	769
08:30 AM	48	4	26	14	92	40	241	32	23	336	7	3	18	1	29	42	174	37	0	253	710
08:45 AM	58	5	30	6	99	11	208	36	7	262	9	3	11	0	23	31	178	21	0	230	614
Total	221	28	97	52	398	164	865	196	72	1297	25	10	64	1	100	140	662	115	0	917	2712
Grand Total	434	42	165	64	705	252	1600	320	100	2272	37	13	109	4	163	238	1101	243	0	1582	4722
Apprch %	61.6	6	23.4	9.1		11.1	70.4	14.1	4.4		22.7	8	66.9	2.5		15	69.6	15.4	0		
Total %	9.2	0.9	3.5	1.4	14.9	5.3	33.9	6.8	2.1	48.1	0.8	0.3	2.3	0.1	3.5	5	23.3	5.1	0	33.5	

Start Time	MARY AVE Southbound				STEVENS CREEK BLVD Westbound				MARY AVE Northbound				STEVENS CREEK BLVD Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 08:00 AM																	
08:00 AM	63	5	21	89	53	191	40	284	4	0	16	20	29	153	24	206	599
08:15 AM	52	14	20	86	60	225	88	373	5	4	19	28	38	157	33	228	715
08:30 AM	48	4	26	78	40	241	32	313	7	3	18	28	42	174	37	253	672
08:45 AM	58	5	30	93	11	208	36	255	9	3	11	23	31	178	21	230	601
Total Volume	221	28	97	346	164	865	196	1225	25	10	64	99	140	662	115	917	2587
% App. Total	63.9	8.1	28		13.4	70.6	16		25.3	10.1	64.6		15.3	72.2	12.5		
PHF	.877	.500	.808	.930	.683	.897	.557	.821	.694	.625	.842	.884	.833	.930	.777	.906	.905



# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 5AM FINAL  
 Site Code : 00000005  
 Start Date : 2/23/2016  
 Page No : 1

## Groups Printed- Bikes

Start Time	MARY AVE Southbound					STEVENS CREEK BLVD Westbound					MARY AVE Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
07:00 AM	1	0	1	0	2	0	1	0	0	1	0	0	0	0	0	0	0	1	0	1	4
07:15 AM	0	2	0	0	2	0	2	0	0	2	0	2	0	0	2	0	1	1	0	2	8
07:30 AM	0	0	0	0	0	0	0	0	0	0	0	2	0	0	2	0	0	0	0	0	2
07:45 AM	0	1	0	0	1	0	1	0	0	1	0	2	1	0	3	0	0	1	0	1	6
<b>Total</b>	<b>1</b>	<b>3</b>	<b>1</b>	<b>0</b>	<b>5</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>6</b>	<b>1</b>	<b>0</b>	<b>7</b>	<b>0</b>	<b>1</b>	<b>3</b>	<b>0</b>	<b>4</b>	<b>20</b>
08:00 AM	1	1	0	0	2	2	1	1	0	4	0	0	0	0	0	2	2	0	0	4	10
08:15 AM	0	3	0	0	3	1	0	0	0	1	0	0	0	0	0	1	0	0	0	1	5
08:30 AM	0	0	2	0	2	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	3
08:45 AM	0	0	0	0	0	0	1	0	0	1	0	1	0	0	1	0	1	0	0	1	3
<b>Total</b>	<b>1</b>	<b>4</b>	<b>2</b>	<b>0</b>	<b>7</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>	<b>6</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>3</b>	<b>3</b>	<b>1</b>	<b>0</b>	<b>7</b>	<b>21</b>
Grand Total	2	7	3	0	12	3	6	1	0	10	0	7	1	0	8	3	4	4	0	11	41
Apprch %	16.7	58.3	25	0		30	60	10	0		0	87.5	12.5	0		27.3	36.4	36.4	0		
Total %	4.9	17.1	7.3	0	29.3	7.3	14.6	2.4	0	24.4	0	17.1	2.4	0	19.5	7.3	9.8	9.8	0	26.8	

Start Time	MARY AVE Southbound				STEVENS CREEK BLVD Westbound				MARY AVE Northbound				STEVENS CREEK BLVD Eastbound				Int. Total			
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total				
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																				
Peak Hour for Entire Intersection Begins at 07:15 AM																				
07:15 AM	0	2	0	2	0	2	0	2	0	2	0	2	0	2	0	1	1	2	2	8
07:30 AM	0	0	0	0	0	0	0	0	0	0	2	0	2	0	0	0	0	0	0	2
07:45 AM	0	1	0	1	0	1	0	1	0	1	0	2	1	3	0	0	1	1	1	6
08:00 AM	1	1	0	2	2	1	1	4	0	0	0	0	0	0	2	2	0	4	4	10
Total Volume	1	4	0	5	2	4	1	7	0	6	1	7	0	6	2	3	2	7	7	26
% App. Total	20	80	0		28.6	57.1	14.3		0	85.7	14.3		28.6	42.9	28.6					
PHF	.250	.500	.000	.625	.250	.500	.250	.438	.000	.750	.250	.583	.250	.375	.500	.438				.650

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*tdsbay@cs.com*

File Name : 5AM FINAL

Site Code : 00000005

Start Date : 2/23/2016

Page No : 2

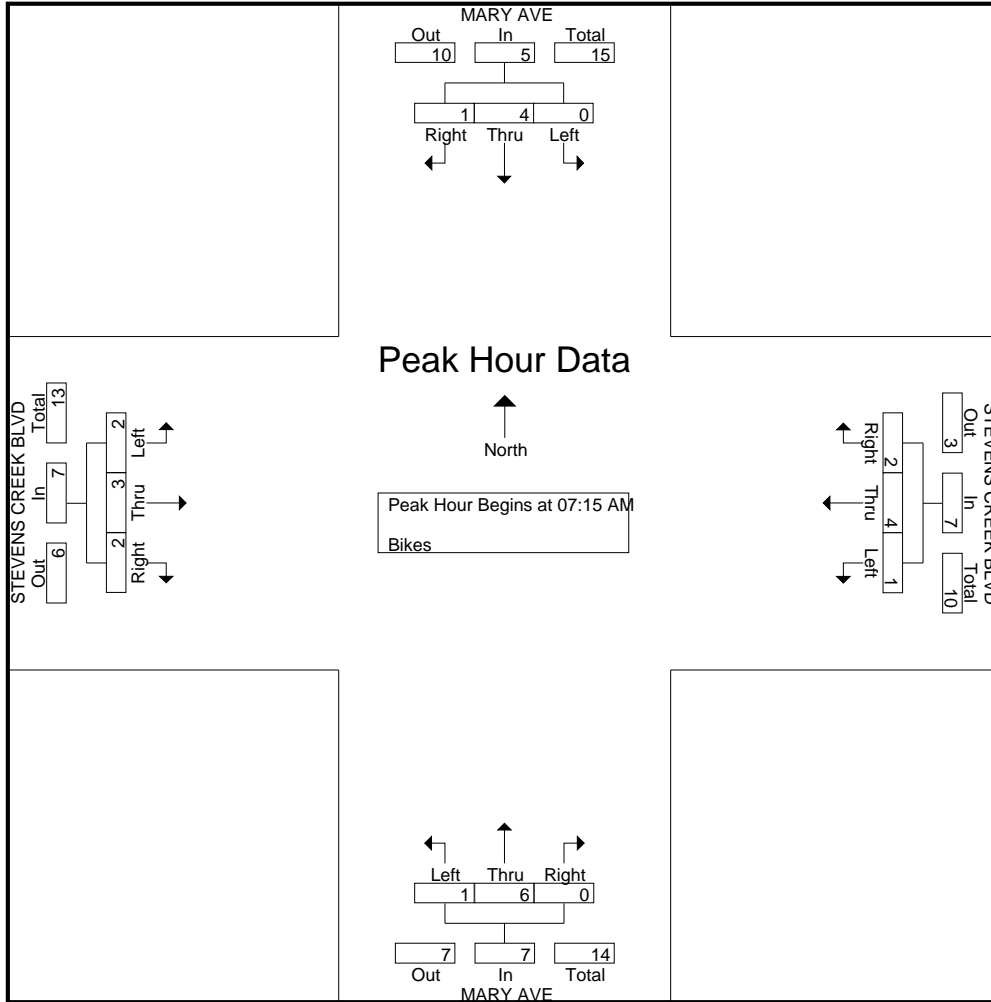

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 5PM FINAL  
 Site Code : 00000005  
 Start Date : 2/23/2016  
 Page No : 1

## Groups Printed- Vehicles

Start Time	MARY AVE Southbound					STEVENS CREEK BLVD Westbound					MARY AVE Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	38	9	31	17	95	28	204	30	31	293	10	4	46	3	63	16	291	37	1	345	796
04:15 PM	27	6	41	15	89	35	189	30	31	285	5	4	28	1	38	20	223	52	0	295	707
04:30 PM	31	5	42	11	89	23	218	15	15	271	13	3	31	1	48	18	260	49	0	327	735
04:45 PM	17	6	40	17	80	24	188	22	25	259	6	3	37	2	48	14	268	35	0	317	704
<b>Total</b>	<b>113</b>	<b>26</b>	<b>154</b>	<b>60</b>	<b>353</b>	<b>110</b>	<b>799</b>	<b>97</b>	<b>102</b>	<b>1108</b>	<b>34</b>	<b>14</b>	<b>142</b>	<b>7</b>	<b>197</b>	<b>68</b>	<b>1042</b>	<b>173</b>	<b>1</b>	<b>1284</b>	<b>2942</b>
05:00 PM	30	5	32	15	82	26	232	25	26	309	13	5	34	5	57	22	331	52	0	405	853
05:15 PM	42	9	48	6	105	29	234	26	33	322	15	5	47	1	68	22	364	55	0	441	936
05:30 PM	51	28	50	20	149	34	207	29	37	307	13	5	32	1	51	17	343	55	0	415	922
05:45 PM	28	11	36	15	90	28	258	22	33	341	15	0	39	3	57	33	368	48	0	449	937
<b>Total</b>	<b>151</b>	<b>53</b>	<b>166</b>	<b>56</b>	<b>426</b>	<b>117</b>	<b>931</b>	<b>102</b>	<b>129</b>	<b>1279</b>	<b>56</b>	<b>15</b>	<b>152</b>	<b>10</b>	<b>233</b>	<b>94</b>	<b>1406</b>	<b>210</b>	<b>0</b>	<b>1710</b>	<b>3648</b>
Grand Total	264	79	320	116	779	227	1730	199	231	2387	90	29	294	17	430	162	2448	383	1	2994	6590
Apprch %	33.9	10.1	41.1	14.9		9.5	72.5	8.3	9.7		20.9	6.7	68.4	4		5.4	81.8	12.8	0		
Total %	4	1.2	4.9	1.8	11.8	3.4	26.3	3	3.5	36.2	1.4	0.4	4.5	0.3	6.5	2.5	37.1	5.8	0	45.4	

Start Time	MARY AVE Southbound				App. Total	STEVENS CREEK BLVD Westbound				App. Total	MARY AVE Northbound				App. Total	STEVENS CREEK BLVD Eastbound				Int. Total	
	Right	Thru	Left	Peds		Right	Thru	Left	Peds		Right	Thru	Left	Peds		Right	Thru	Left	Peds		
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 05:00 PM																					
05:00 PM	30	5	32	15	67	26	232	25	26	283	13	5	34	5	52	22	331	52	0	405	807
05:15 PM	42	9	48	6	99	29	234	26	33	289	15	5	47	1	67	22	364	55	0	441	896
05:30 PM	51	28	50	20	129	34	207	29	37	270	13	5	32	1	50	17	343	55	0	415	864
05:45 PM	28	11	36	15	75	28	258	22	33	308	15	0	39	3	54	33	368	48	0	449	886
Total Volume	151	53	166	56	370	117	931	102	129	1150	56	15	152	10	223	94	1406	210	0	1710	3453
% App. Total	40.8	14.3	44.9	14.9		10.2	81	8.9			25.1	6.7	68.2			5.5	82.2	12.3			
PHF	.740	.473	.830	.717		.860	.902	.879	.933		.933	.750	.809	.832		.712	.955	.955	.952		.963

# Traffic Data Service


Campbell, CA  
 (408) 377-2988  
*idsbay@cs.com*

File Name : 5PM FINAL

Site Code : 00000005

Start Date : 2/23/2016

Page No : 2

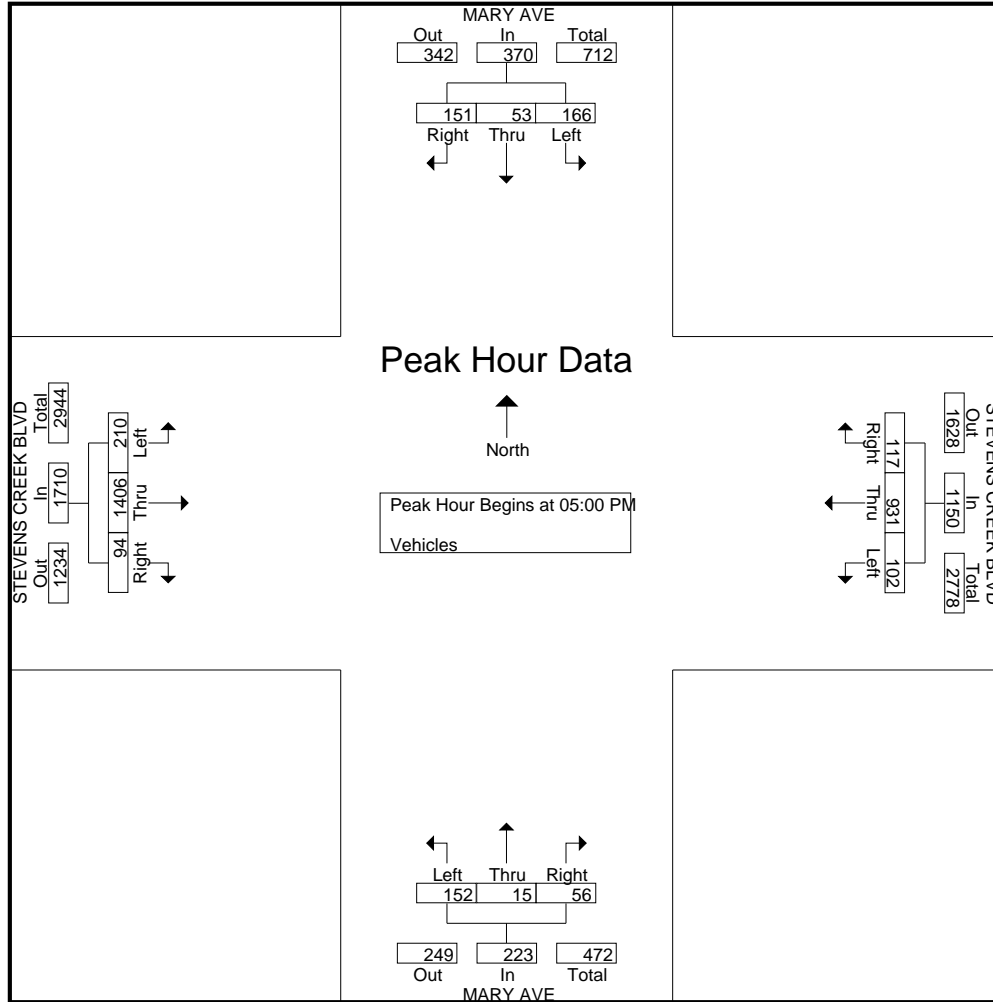



# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 5PM FINAL  
 Site Code : 00000005  
 Start Date : 2/23/2016  
 Page No : 1

## Groups Printed- Bikes

Start Time	MARY AVE Southbound					STEVENS CREEK BLVD Westbound					MARY AVE Northbound					STEVENS CREEK BLVD Eastbound					Int. Total					
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total						
04:00 PM	0	0	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
04:15 PM	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
04:30 PM	0	2	0	0	2	2	1	0	0	3	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	6
04:45 PM	0	1	0	0	1	0	2	0	0	2	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	3
<b>Total</b>	<b>0</b>	<b>4</b>	<b>1</b>	<b>0</b>	<b>5</b>	<b>2</b>	<b>3</b>	<b>0</b>	<b>0</b>	<b>5</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>11</b>
05:00 PM	0	2	0	0	2	0	2	0	0	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4
05:15 PM	0	2	1	0	3	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4
05:30 PM	1	4	3	0	8	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	9
05:45 PM	2	0	0	0	2	0	1	0	0	1	0	2	0	0	2	0	0	0	0	0	0	0	0	0	0	5
<b>Total</b>	<b>3</b>	<b>8</b>	<b>4</b>	<b>0</b>	<b>15</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>22</b>
Grand Total	3	12	5	0	20	2	7	0	0	9	1	3	0	0	4	0	0	0	0	0	0	0	0	0	0	33
Apprch %	15	60	25	0		22.2	77.8	0	0		25	75	0	0		0	0	0	0		0	0	0	0		
Total %	9.1	36.4	15.2	0	60.6	6.1	21.2	0	0	27.3	3	9.1	0	0	12.1	0	0	0	0	0	0	0	0	0	0	

Start Time	MARY AVE Southbound				STEVENS CREEK BLVD Westbound				MARY AVE Northbound				STEVENS CREEK BLVD Eastbound				Int. Total				
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total					
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 05:00 PM																					
05:00 PM	0	2	0	2	0	2	0	2	0	0	0	0	0	0	0	0	0	0	0	0	4
05:15 PM	0	2	1	3	0	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	4
05:30 PM	1	4	3	8	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	9
05:45 PM	2	0	0	2	0	1	0	1	0	2	0	2	0	0	0	0	0	0	0	0	5
Total Volume	3	8	4	15	0	4	0	4	0	3	0	3	0	0	0	0	0	0	0	0	22
% App. Total	20	53.3	26.7		0	100	0		0	100	0		0	0	0		0	0	0	0	
PHF	.375	.500	.333	.469	.000	.500	.000	.500	.000	.375	.000	.375	.000	.000	.000	.000	.000	.000	.000	.000	.611

# Traffic Data Service


Campbell, CA  
 (408) 377-2988  
*idsbay@cs.com*

File Name : 5PM FINAL

Site Code : 00000005

Start Date : 2/23/2016

Page No : 2

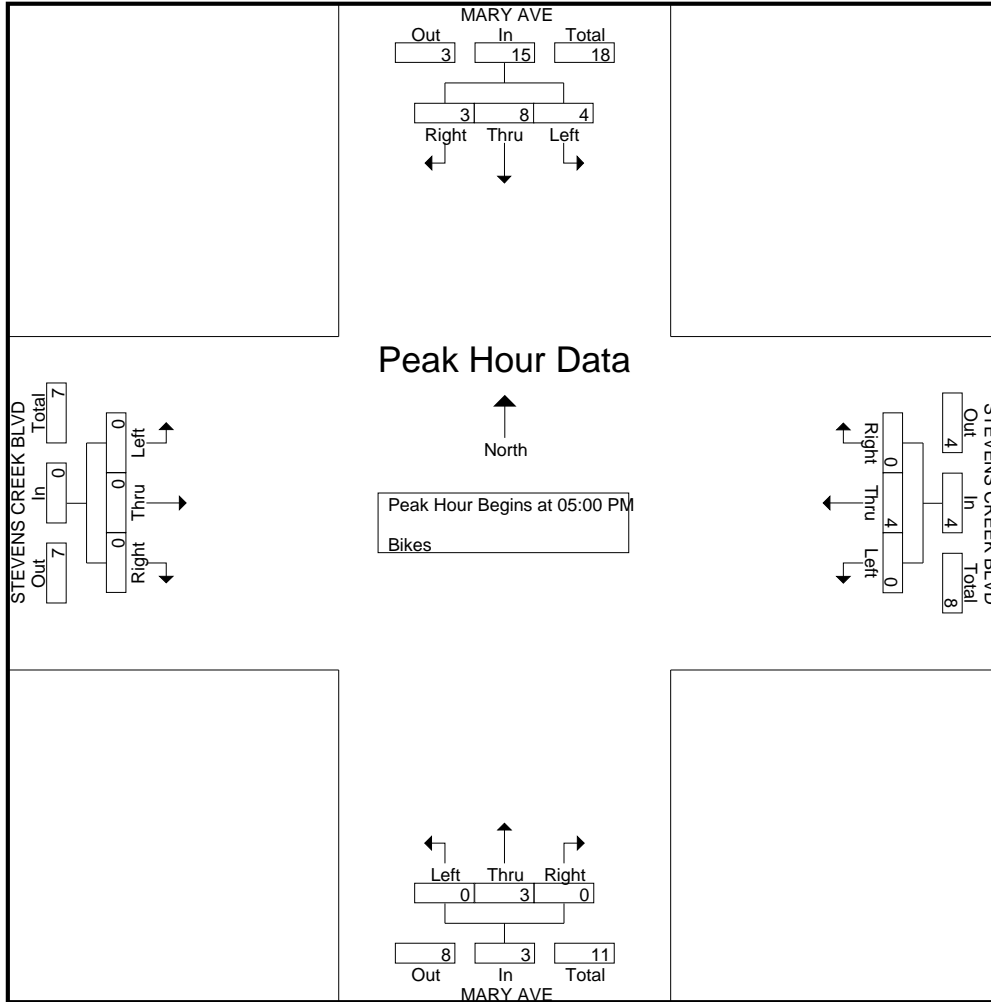

# Traffic Data Service

Campbell, CA  
(408) 377-2988  
tdsbay@cs.com

File Name : 3AM FINAL  
Site Code : 00000003  
Start Date : 3/26/2015  
Page No : 1

Groups Printed- Vehicles

Start Time	N STELLING RD Southbound					STEVENS CREEK BLVD Westbound					S STELLING RD Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
07:00 AM	25	17	13	3	58	7	75	19	2	103	11	23	40	1	75	4	38	25	7	74	310
07:15 AM	32	30	10	0	72	9	122	29	2	162	15	69	56	1	141	3	58	33	3	97	472
07:30 AM	22	22	13	1	58	22	130	25	3	180	14	77	71	8	170	11	69	63	2	145	553
07:45 AM	37	32	27	4	100	31	171	28	4	234	15	77	44	7	143	17	108	44	11	180	657
<b>Total</b>	<b>116</b>	<b>101</b>	<b>63</b>	<b>8</b>	<b>288</b>	<b>69</b>	<b>498</b>	<b>101</b>	<b>11</b>	<b>679</b>	<b>55</b>	<b>246</b>	<b>211</b>	<b>17</b>	<b>529</b>	<b>35</b>	<b>273</b>	<b>165</b>	<b>23</b>	<b>496</b>	<b>1992</b>
08:00 AM	39	42	34	20	135	22	180	14	1	217	19	93	64	0	176	23	103	41	10	177	705
08:15 AM	37	62	29	7	135	35	177	31	5	248	26	170	83	8	287	28	116	60	16	220	890
08:30 AM	44	48	24	18	134	33	164	60	8	265	22	168	70	2	262	26	125	77	20	248	909
08:45 AM	45	60	45	11	161	43	223	77	3	346	43	157	52	18	270	38	153	73	5	269	1046
<b>Total</b>	<b>165</b>	<b>212</b>	<b>132</b>	<b>56</b>	<b>565</b>	<b>133</b>	<b>744</b>	<b>182</b>	<b>17</b>	<b>1076</b>	<b>110</b>	<b>588</b>	<b>269</b>	<b>28</b>	<b>995</b>	<b>115</b>	<b>497</b>	<b>251</b>	<b>51</b>	<b>914</b>	<b>3550</b>
09:00 AM	41	79	51	14	185	37	189	109	2	337	28	139	62	0	229	30	160	71	8	269	1020
09:15 AM	42	49	43	11	145	37	168	51	10	266	32	109	43	0	184	28	168	75	18	289	884
09:30 AM	37	39	45	11	132	25	168	46	4	243	31	81	53	0	165	16	167	65	5	253	793
09:45 AM	32	29	46	10	117	27	160	48	3	238	43	84	50	0	177	23	153	58	11	245	777
<b>Total</b>	<b>152</b>	<b>196</b>	<b>185</b>	<b>46</b>	<b>579</b>	<b>126</b>	<b>685</b>	<b>254</b>	<b>19</b>	<b>1084</b>	<b>134</b>	<b>413</b>	<b>208</b>	<b>0</b>	<b>755</b>	<b>97</b>	<b>648</b>	<b>269</b>	<b>42</b>	<b>1056</b>	<b>3474</b>
Grand Total	433	509	380	110	1432	328	1927	537	47	2839	299	1247	688	45	2279	247	1418	685	116	2466	9016
Apprch %	30.2	35.5	26.5	7.7		11.6	67.9	18.9	1.7		13.1	54.7	30.2	2		10	57.5	27.8	4.7		
Total %	4.8	5.6	4.2	1.2	15.9	3.6	21.4	6	0.5	31.5	3.3	13.8	7.6	0.5	25.3	2.7	15.7	7.6	1.3	27.4	

Start Time	N STELLING RD Southbound				STEVENS CREEK BLVD Westbound				S STELLING RD Northbound				STEVENS CREEK BLVD Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 07:00 AM to 09:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 08:15 AM																	
08:15 AM	37	62	29	128	35	177	31	243	26	<b>170</b>	<b>83</b>	<b>279</b>	28	116	60	204	854
08:30 AM	44	48	24	116	33	164	60	257	22	168	70	260	26	125	<b>77</b>	228	861
08:45 AM	<b>45</b>	60	45	150	<b>43</b>	<b>223</b>	77	<b>343</b>	<b>43</b>	157	52	252	<b>38</b>	153	73	<b>264</b>	<b>1009</b>
09:00 AM	41	<b>79</b>	<b>51</b>	<b>171</b>	37	189	<b>109</b>	335	28	139	62	229	30	<b>160</b>	71	261	996
Total Volume	167	249	149	565	148	753	277	1178	119	634	267	1020	122	554	281	957	3720
% App. Total	29.6	44.1	26.4		12.6	63.9	23.5		11.7	62.2	26.2		12.7	57.9	29.4		
PHF	.928	.788	.730	.826	.860	.844	.635	.859	.692	.932	.804	.914	.803	.866	.912	.906	.922

# Traffic Data Service


Campbell, CA  
 (408) 377-2988  
*tdsbay@cs.com*

File Name : 3AM FINAL

Site Code : 00000003

Start Date : 3/26/2015

Page No : 2

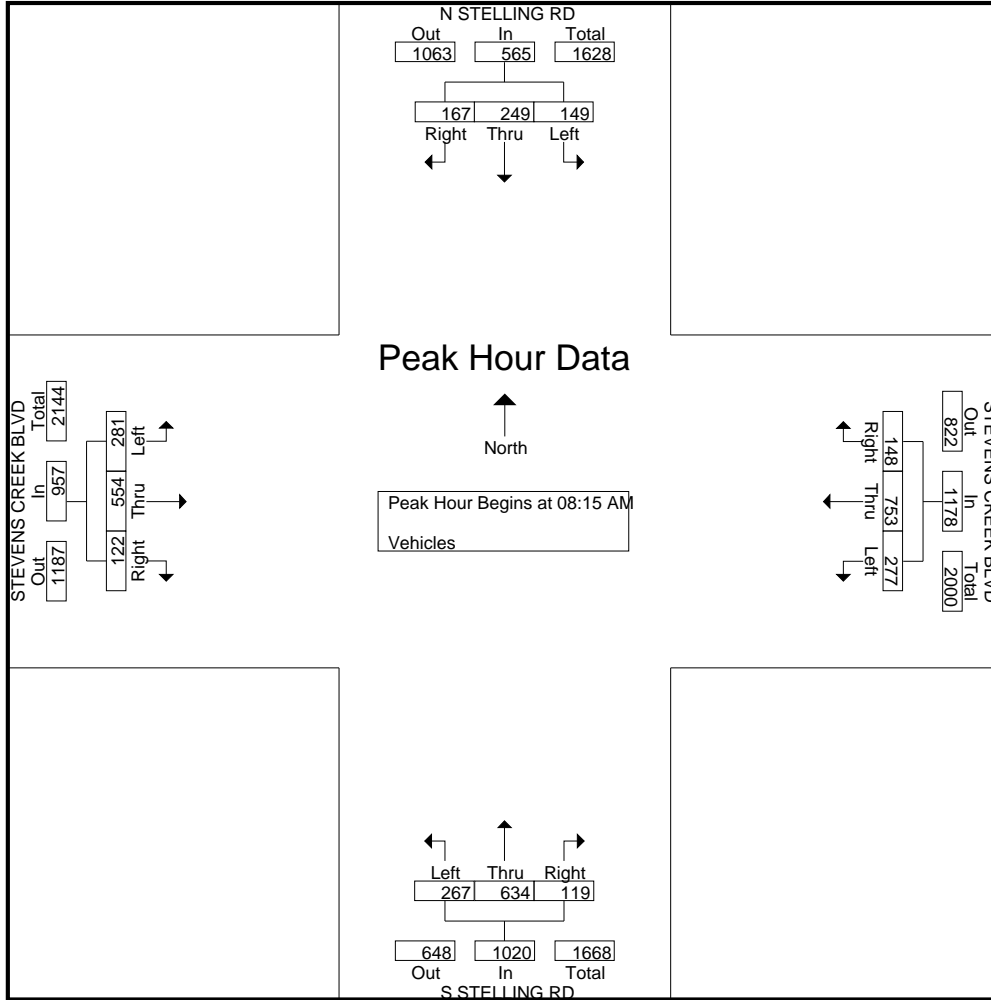

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 3PM FINAL  
 Site Code : 00000003  
 Start Date : 3/26/2015  
 Page No : 1

Groups Printed- Vehicles


Start Time	N STELLING RD Southbound					STEVENS CREEK BLVD Westbound					S STELLING RD Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	46	98	67	33	244	38	213	69	5	325	38	62	48	0	148	63	283	100	0	446	1163
04:15 PM	33	82	61	8	184	25	190	50	10	275	36	46	46	0	128	77	237	72	0	386	973
04:30 PM	41	84	54	10	189	31	189	77	10	307	26	66	38	0	130	98	280	70	0	448	1074
04:45 PM	35	71	60	20	186	29	171	71	14	285	39	54	47	0	140	75	321	72	0	468	1079
Total	155	335	242	71	803	123	763	267	39	1192	139	228	179	0	546	313	1121	314	0	1748	4289
05:00 PM	34	105	62	9	210	39	198	77	13	327	48	105	39	0	192	87	284	67	5	443	1172
05:15 PM	32	139	67	8	246	40	232	88	11	371	47	75	40	4	166	59	380	83	2	524	1307
05:30 PM	36	133	76	14	259	26	182	90	6	304	36	105	46	0	187	62	300	77	10	449	1199
05:45 PM	50	129	73	14	266	40	267	97	10	414	45	82	42	1	170	65	304	78	4	451	1301
Total	152	506	278	45	981	145	879	352	40	1416	176	367	167	5	715	273	1268	305	21	1867	4979
06:00 PM	56	163	87	12	318	35	224	76	8	343	52	82	41	0	175	73	275	80	0	428	1264
06:15 PM	48	138	75	16	277	36	241	93	14	384	26	78	30	0	134	72	244	72	11	399	1194
06:30 PM	36	109	67	10	222	32	198	73	9	312	34	64	33	5	136	82	277	78	7	444	1114
06:45 PM	39	140	74	10	263	22	186	73	10	291	33	61	32	6	132	77	163	61	4	305	991
Total	179	550	303	48	1080	125	849	315	41	1330	145	285	136	11	577	304	959	291	22	1576	4563
Grand Total	486	1391	823	164	2864	393	2491	934	120	3938	460	880	482	16	1838	890	3348	910	43	5191	13831
Apprch %	17	48.6	28.7	5.7		10	63.3	23.7	3		25	47.9	26.2	0.9		17.1	64.5	17.5	0.8		
Total %	3.5	10.1	6	1.2	20.7	2.8	18	6.8	0.9	28.5	3.3	6.4	3.5	0.1	13.3	6.4	24.2	6.6	0.3	37.5	

Start Time	N STELLING RD Southbound				STEVENS CREEK BLVD Westbound				S STELLING RD Northbound				STEVENS CREEK BLVD Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 04:00 PM to 06:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 05:15 PM																	
05:15 PM	32	139	67	238	<b>40</b>	232	88	360	47	75	40	162	59	<b>380</b>	<b>83</b>	<b>522</b>	<b>1282</b>
05:30 PM	36	133	76	245	26	182	90	298	36	<b>105</b>	<b>46</b>	<b>187</b>	62	300	77	439	1169
05:45 PM	50	129	73	252	40	<b>267</b>	<b>97</b>	<b>404</b>	45	82	42	169	65	304	78	447	1272
06:00 PM	<b>56</b>	<b>163</b>	<b>87</b>	<b>306</b>	35	224	76	335	<b>52</b>	82	41	175	<b>73</b>	275	80	428	1244
Total Volume	174	564	303	1041	141	905	351	1397	180	344	169	693	259	1259	318	1836	4967
% App. Total	16.7	54.2	29.1		10.1	64.8	25.1		26	49.6	24.4		14.1	68.6	17.3		
PHF	.777	.865	.871	.850	.881	.847	.905	.864	.865	.819	.918	.926	.887	.828	.958	.879	.969

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
*tdsbay@cs.com*

File Name : 3PM FINAL  
 Site Code : 00000003  
 Start Date : 3/26/2015  
 Page No : 2

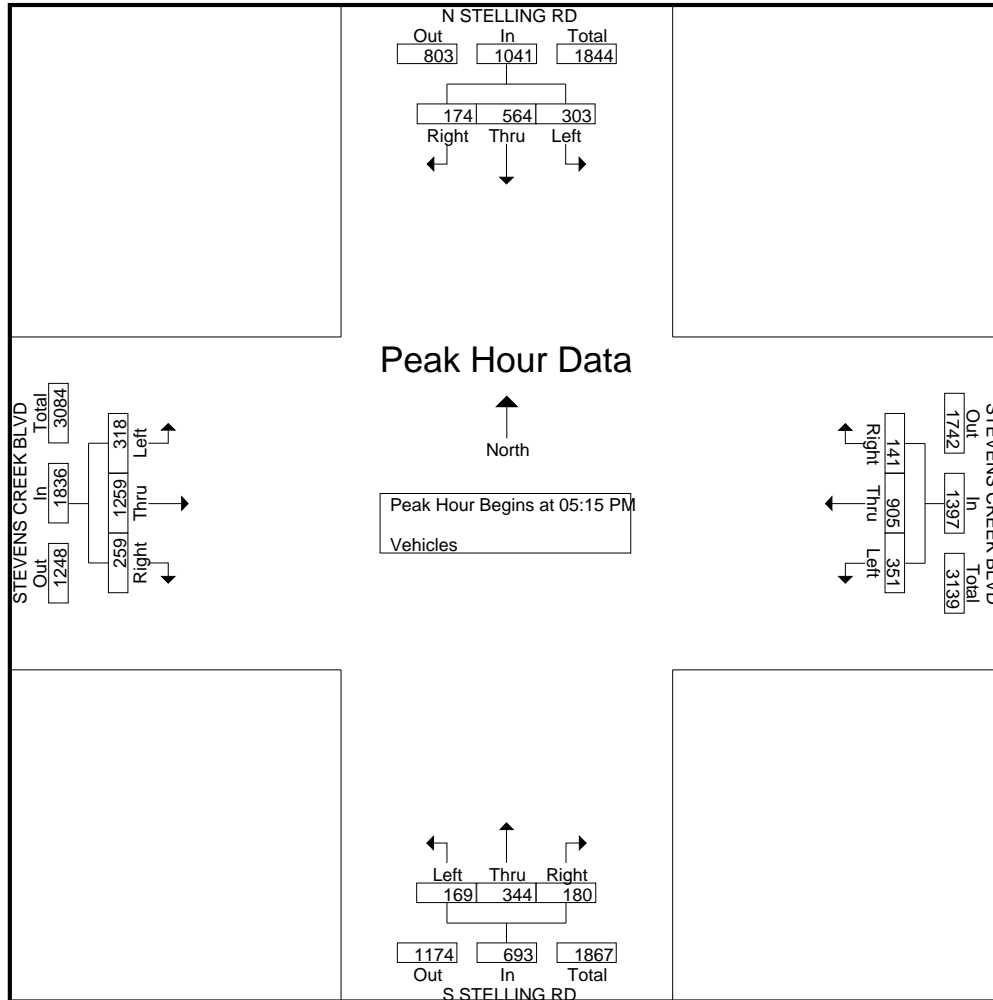

# Traffic Data Service

Campbell, CA  
(408) 377-2988  
tdsbay@cs.com

File Name : 3PM FINAL  
Site Code : 00000003  
Start Date : 3/26/2015  
Page No : 1

Groups Printed- Bikes

Start Time	N STELLING RD Southbound					STEVENS CREEK BLVD Westbound					S STELLING RD Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	0	1	0	0	1	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	2
04:15 PM	0	0	0	0	0	0	1	0	0	1	0	1	0	0	1	0	0	0	0	0	2
04:30 PM	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	1
04:45 PM	0	3	0	0	3	0	0	0	0	0	0	2	0	0	2	0	1	1	0	2	7
<b>Total</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>5</b>	<b>0</b>	<b>0</b>	<b>5</b>	<b>0</b>	<b>1</b>	<b>1</b>	<b>0</b>	<b>2</b>	<b>12</b>
05:00 PM	0	0	0	0	0	1	2	0	0	3	0	5	0	0	5	0	1	0	0	1	9
05:15 PM	0	1	0	0	1	1	2	0	0	3	0	1	1	0	2	0	1	0	0	1	7
05:30 PM	0	3	0	1	4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4
05:45 PM	1	2	0	0	3	2	2	0	0	4	0	1	0	0	1	0	0	0	0	0	8
<b>Total</b>	<b>1</b>	<b>6</b>	<b>0</b>	<b>1</b>	<b>8</b>	<b>4</b>	<b>6</b>	<b>0</b>	<b>0</b>	<b>10</b>	<b>0</b>	<b>7</b>	<b>1</b>	<b>0</b>	<b>8</b>	<b>0</b>	<b>2</b>	<b>0</b>	<b>0</b>	<b>2</b>	<b>28</b>
06:00 PM	0	7	0	0	7	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	8
06:15 PM	0	2	0	0	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2
06:30 PM	0	3	0	0	3	0	0	0	0	0	0	0	1	0	1	0	0	0	0	0	4
06:45 PM	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
<b>Total</b>	<b>0</b>	<b>13</b>	<b>0</b>	<b>0</b>	<b>13</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>15</b>
Grand Total	1	23	0	1	25	4	7	0	0	11	0	12	2	0	14	0	4	1	0	5	55
Apprch %	4	92	0	4		36.4	63.6	0	0		0	85.7	14.3	0		0	80	20	0		
Total %	1.8	41.8	0	1.8	45.5	7.3	12.7	0	0	20	0	21.8	3.6	0	25.5	0	7.3	1.8	0	9.1	

Start Time	N STELLING RD Southbound					STEVENS CREEK BLVD Westbound					S STELLING RD Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
Peak Hour Analysis From 04:00 PM to 06:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 05:00 PM																					
05:00 PM	0	0	0	0	0	1	2	0	0	3	0	5	0	0	5	0	1	0	0	1	9
05:15 PM	0	1	0	0	1	1	2	0	0	3	0	1	1	0	2	0	1	0	0	1	7
05:30 PM	0	3	0	0	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3
05:45 PM	1	2	0	0	3	2	2	0	0	4	0	1	0	0	1	0	0	0	0	0	8
Total Volume	1	6	0	0	7	4	6	0	0	10	0	7	1	0	8	0	2	0	0	2	27
% App. Total	14.3	85.7	0	0		40	60	0	0		0	87.5	12.5	0		0	100	0	0		
PHF	.250	.500	.000	.000	.583	.500	.750	.000	.000	.625	.000	.350	.250	.400	.000	.500	.000	.000	.500	.000	.750

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 3PM FINAL

Site Code : 00000003

Start Date : 3/26/2015

Page No : 2

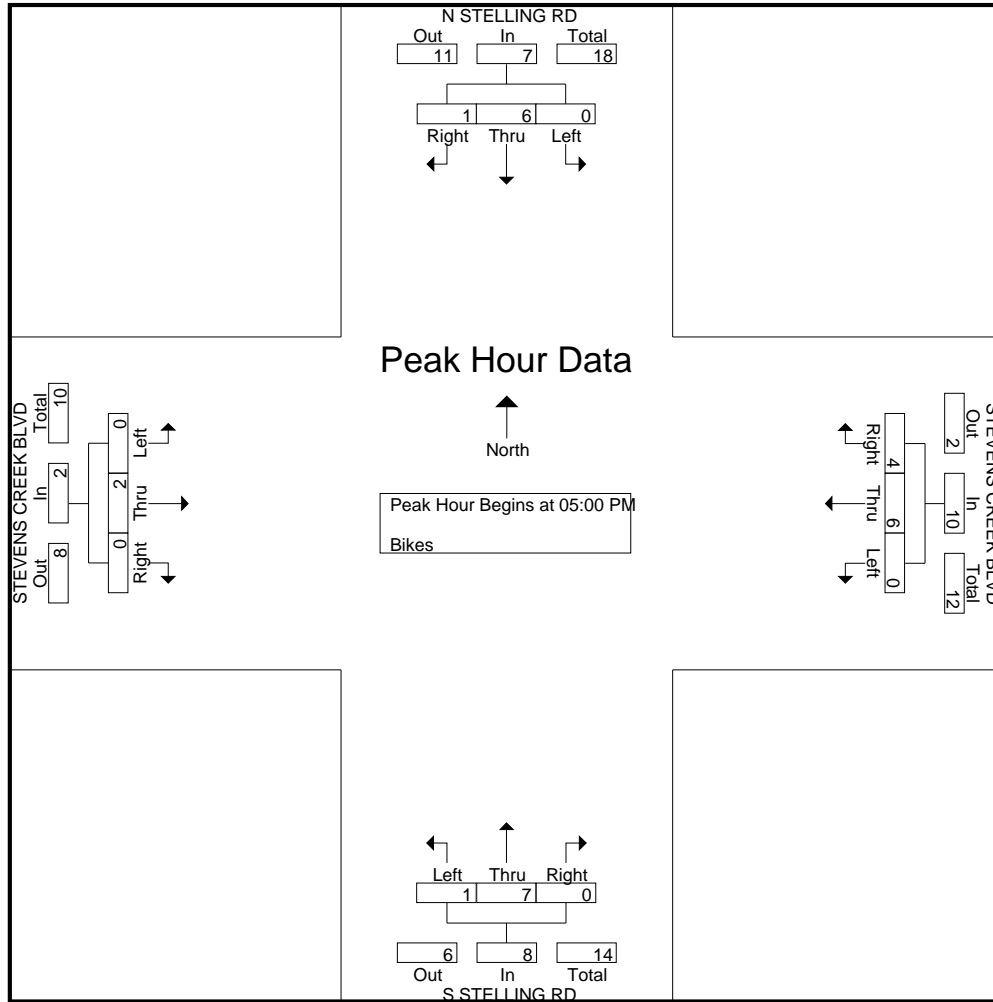



# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 6AM FINAL  
 Site Code : 00000006  
 Start Date : 2/25/2016  
 Page No : 1

## Groups Printed- Vehicles

Start Time	SAICH WAY Southbound					STEVENS CREEK BLVD Westbound					Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
07:00 AM	24	0	4	3	31	9	145	0	1	155	0	0	0	0	0	0	55	12	0	67	253
07:15 AM	25	0	3	2	30	6	186	0	0	192	0	0	0	0	0	0	61	16	0	77	299
07:30 AM	10	0	2	2	14	10	212	0	0	222	0	0	0	0	0	0	85	21	0	106	342
07:45 AM	17	0	9	3	29	13	222	0	0	235	0	0	0	0	0	0	117	20	0	137	401
Total	76	0	18	10	104	38	765	0	1	804	0	0	0	0	0	0	318	69	0	387	1295
08:00 AM	26	0	11	7	44	11	296	0	2	309	0	0	0	0	0	0	140	32	0	172	525
08:15 AM	29	0	8	2	39	16	358	0	3	377	0	0	0	0	0	0	148	33	0	181	597
08:30 AM	24	0	14	10	48	15	287	0	4	306	0	0	0	0	0	0	152	43	0	195	549
08:45 AM	19	0	8	4	31	15	261	0	5	281	0	0	0	0	0	0	188	37	0	225	537
Total	98	0	41	23	162	57	1202	0	14	1273	0	0	0	0	0	0	628	145	0	773	2208
Grand Total	174	0	59	33	266	95	1967	0	15	2077	0	0	0	0	0	0	946	214	0	1160	3503
Apprch %	65.4	0	22.2	12.4		4.6	94.7	0	0.7		0	0	0	0	0	0	81.6	18.4	0		
Total %	5	0	1.7	0.9	7.6	2.7	56.2	0	0.4	59.3	0	0	0	0	0	0	27	6.1	0	33.1	

Start Time	SAICH WAY Southbound				STEVENS CREEK BLVD Westbound				Northbound				STEVENS CREEK BLVD Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 08:00 AM																	
08:00 AM	26	0	11	37	11	296	0	307	0	0	0	0	0	140	32	172	516
08:15 AM	<b>29</b>	0	8	37	<b>16</b>	<b>358</b>	0	<b>374</b>	0	0	0	0	0	148	33	181	<b>592</b>
08:30 AM	24	0	<b>14</b>	<b>38</b>	15	287	0	302	0	0	0	0	0	152	<b>43</b>	195	535
08:45 AM	19	0	8	27	15	261	0	276	0	0	0	0	0	<b>188</b>	37	<b>225</b>	528
Total Volume	98	0	41	139	57	1202	0	1259	0	0	0	0	0	628	145	773	2171
% App. Total	70.5	0	29.5		4.5	95.5	0		0	0	0	0	0	81.2	18.8		
PHF	.845	.000	.732	.914	.891	.839	.000	.842	.000	.000	.000	.000	.000	.835	.843	.859	.917

# Traffic Data Service


Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 6AM FINAL

Site Code : 00000006

Start Date : 2/25/2016

Page No : 2

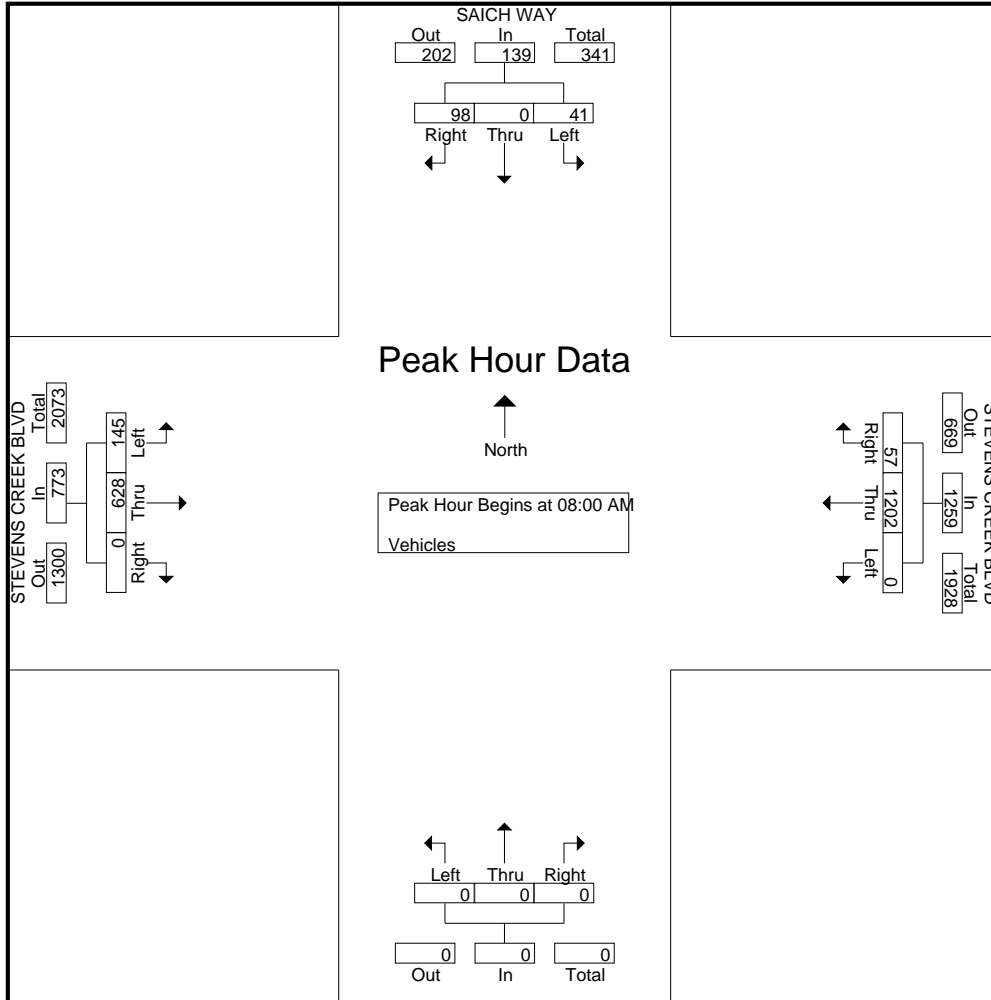

# Traffic Data Service

Campbell, CA  
(408) 377-2988  
tdsbay@cs.com

File Name : 6AM FINAL  
Site Code : 00000006  
Start Date : 2/25/2016  
Page No : 1

Groups Printed- Bikes

Start Time	SAICH WAY Southbound					STEVENS CREEK BLVD Westbound					Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
07:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
07:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	1
07:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
07:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	0	2	2
<b>Total</b>	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3	0	0	3	3
08:00 AM	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	2	0	0	2	3
08:15 AM	0	0	0	0	0	0	4	0	0	4	0	0	0	0	0	0	4	0	0	4	8
08:30 AM	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	2	0	0	2	3
08:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3	0	0	3	3
<b>Total</b>	0	0	0	0	0	0	6	0	0	6	0	0	0	0	0	0	11	0	0	11	17
Grand Total	0	0	0	0	0	0	6	0	0	6	0	0	0	0	0	0	14	0	0	14	20
Apprch %	0	0	0	0		0	100	0	0		0	0	0	0		0	100	0	0		
Total %	0	0	0	0		0	30	0	0	30	0	0	0	0		0	70	0	0	70	

Start Time	SAICH WAY Southbound				STEVENS CREEK BLVD Westbound				Northbound				STEVENS CREEK BLVD Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 08:00 AM																	
08:00 AM	0	0	0	0	0	1	0	1	0	0	0	0	0	2	0	2	3
08:15 AM	0	0	0	0	0	4	0	4	0	0	0	0	0	4	0	4	8
08:30 AM	0	0	0	0	0	1	0	1	0	0	0	0	0	2	0	2	3
08:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	3	0	3	3
Total Volume	0	0	0	0	0	6	0	6	0	0	0	0	0	11	0	11	17
% App. Total	0	0	0		0	100	0		0	0	0		0	100	0		
PHF	.000	.000	.000	.000	.000	.375	.000	.375	.000	.000	.000	.000	.000	.688	.000	.688	.531

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 6AM FINAL

Site Code : 00000006

Start Date : 2/25/2016

Page No : 2

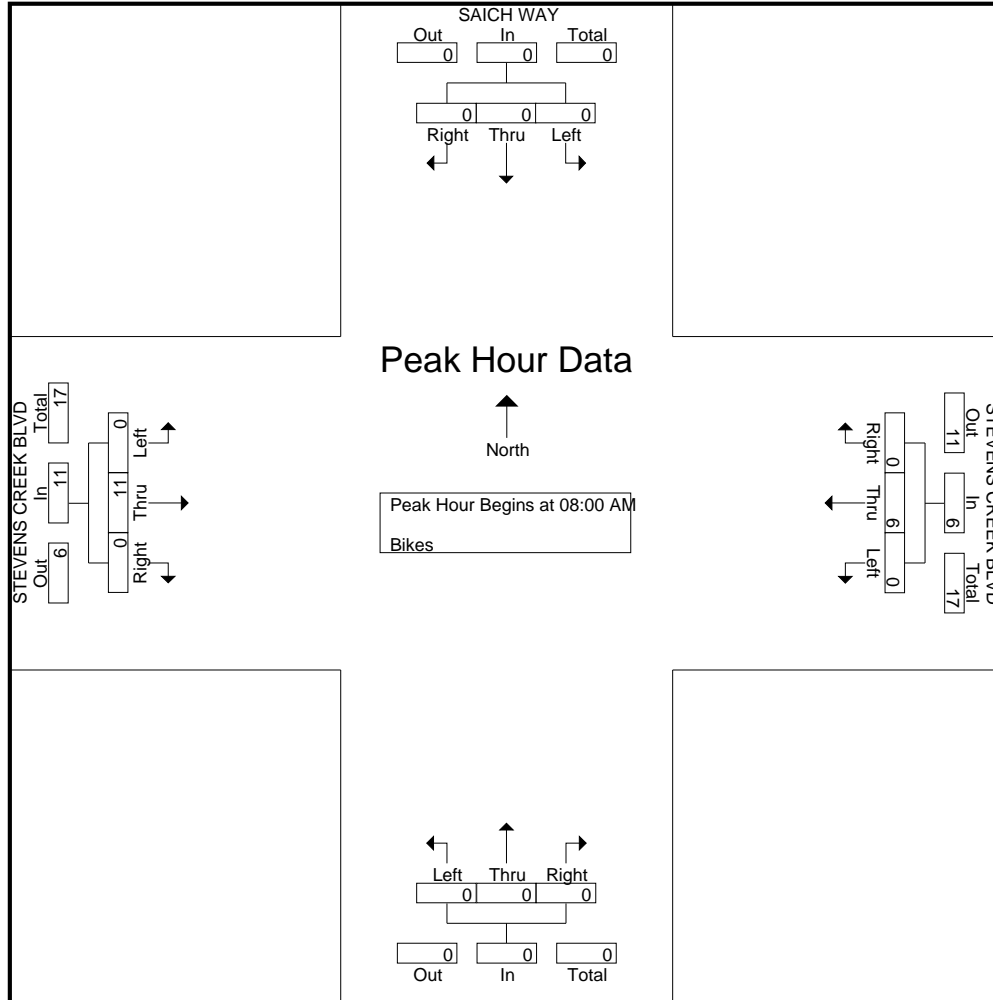

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 6PM FINAL  
 Site Code : 00000006  
 Start Date : 2/25/2016  
 Page No : 1

## Groups Printed- Vehicles

Start Time	SAICH WAY Southbound					STEVENS CREEK BLVD Westbound					Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	41	0	28	13	82	14	256	0	11	281	0	0	0	0	0	0	333	55	0	388	751
04:15 PM	31	0	25	13	69	13	245	0	7	265	0	0	0	0	0	0	302	48	0	350	684
04:30 PM	24	0	18	11	53	4	216	0	6	226	0	0	0	0	0	0	317	35	0	352	631
04:45 PM	28	0	32	14	74	12	262	0	5	279	0	0	0	0	0	0	361	64	0	425	778
Total	124	0	103	51	278	43	979	0	29	1051	0	0	0	0	0	0	1313	202	0	1515	2844
05:00 PM	47	0	42	6	95	8	284	0	2	294	0	0	0	0	0	0	348	38	0	386	775
05:15 PM	42	0	31	9	82	6	269	0	8	283	0	0	0	0	0	0	376	50	0	426	791
05:30 PM	49	0	33	5	87	12	281	0	4	297	0	0	0	0	0	0	411	59	0	470	854
05:45 PM	48	0	26	5	79	17	270	0	3	290	0	0	0	0	0	0	342	57	0	399	768
Total	186	0	132	25	343	43	1104	0	17	1164	0	0	0	0	0	0	1477	204	0	1681	3188
Grand Total	310	0	235	76	621	86	2083	0	46	2215	0	0	0	0	0	0	2790	406	0	3196	6032
Apprch %	49.9	0	37.8	12.2		3.9	94	0	2.1		0	0	0	0	0	0	87.3	12.7	0		
Total %	5.1	0	3.9	1.3	10.3	1.4	34.5	0	0.8	36.7	0	0	0	0	0	0	46.3	6.7	0	53	

Start Time	SAICH WAY Southbound				STEVENS CREEK BLVD Westbound				Northbound				STEVENS CREEK BLVD Eastbound				Int. Total	
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total		
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																		
Peak Hour for Entire Intersection Begins at 05:00 PM																		
05:00 PM	47	0	<b>42</b>	<b>89</b>	8	<b>284</b>	0	292	0	0	0	0	0	0	348	38	386	767
05:15 PM	42	0	31	73	6	269	0	275	0	0	0	0	0	0	376	50	426	774
05:30 PM	<b>49</b>	0	33	82	12	281	0	<b>293</b>	0	0	0	0	0	0	<b>411</b>	<b>59</b>	<b>470</b>	<b>845</b>
05:45 PM	48	0	26	74	17	270	0	287	0	0	0	0	0	0	342	57	399	760
Total Volume	186	0	132	318	43	1104	0	1147	0	0	0	0	0	0	1477	204	1681	3146
% App. Total	58.5	0	41.5		3.7	96.3	0		0	0	0	0	0	0	87.9	12.1		
PHF	.949	.000	.786	.893	.632	.972	.000	.979	.000	.000	.000	.000	.000	.000	.898	.864	.894	.931

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
[idsbay@cs.com](mailto:idsbay@cs.com)

File Name : 6PM FINAL

Site Code : 00000006

Start Date : 2/25/2016

Page No : 2

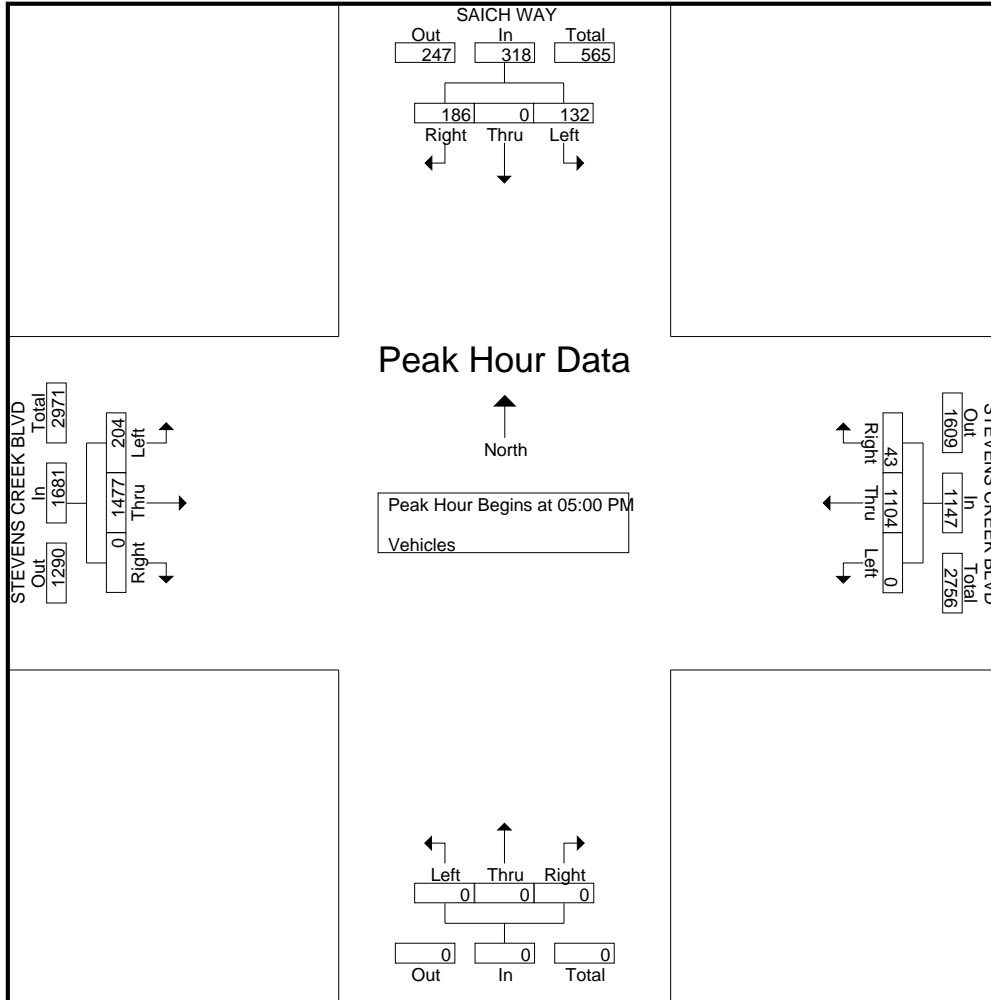

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 6PM FINAL  
 Site Code : 00000006  
 Start Date : 2/25/2016  
 Page No : 1

Groups Printed- Bikes

Start Time	SAICH WAY Southbound					STEVENS CREEK BLVD Westbound					Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	2	1	0	3	4
04:15 PM	1	0	0	0	1	1	2	0	0	3	0	0	0	0	0	0	2	0	0	2	6
04:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3	0	0	3	3
04:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	0	2	2
<b>Total</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>1</b>	<b>3</b>	<b>0</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>9</b>	<b>1</b>	<b>0</b>	<b>10</b>	<b>15</b>
05:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
05:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
05:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	1
05:45 PM	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	4	0	0	4	5
<b>Total</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>5</b>	<b>0</b>	<b>0</b>	<b>5</b>	<b>6</b>
Grand Total	1	0	0	0	1	1	4	0	0	5	0	0	0	0	0	0	14	1	0	15	21
Apprch %	100	0	0	0		20	80	0	0		0	0	0	0		0	93.3	6.7	0		
Total %	4.8	0	0	0	4.8	4.8	19	0	0	23.8	0	0	0	0	0	0	66.7	4.8	0	71.4	

Start Time	SAICH WAY Southbound				App. Total	STEVENS CREEK BLVD Westbound				App. Total	Northbound				App. Total	STEVENS CREEK BLVD Eastbound				Int. Total	
	Right	Thru	Left	Peds		Right	Thru	Left	Peds		Right	Thru	Left	Peds		Right	Thru	Left	Peds		
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 04:00 PM																					
04:00 PM	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	2	1	0	3	4
04:15 PM	1	0	0	0	1	1	2	0	0	3	0	0	0	0	0	0	2	0	0	2	6
04:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3	0	0	3	3
04:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	0	2	2
Total Volume	1	0	0	0	1	1	3	0	0	4	0	0	0	0	0	0	9	1	0	10	15
% App. Total	100	0	0	0		25	75	0	0		0	0	0	0		0	90	10	0		
PHF	.250	.000	.000	.000	.250	.250	.375	.000	.000	.333	.000	.000	.000	.000	.000	.000	.750	.250	.000	.833	.625

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 6PM FINAL

Site Code : 00000006

Start Date : 2/25/2016

Page No : 2

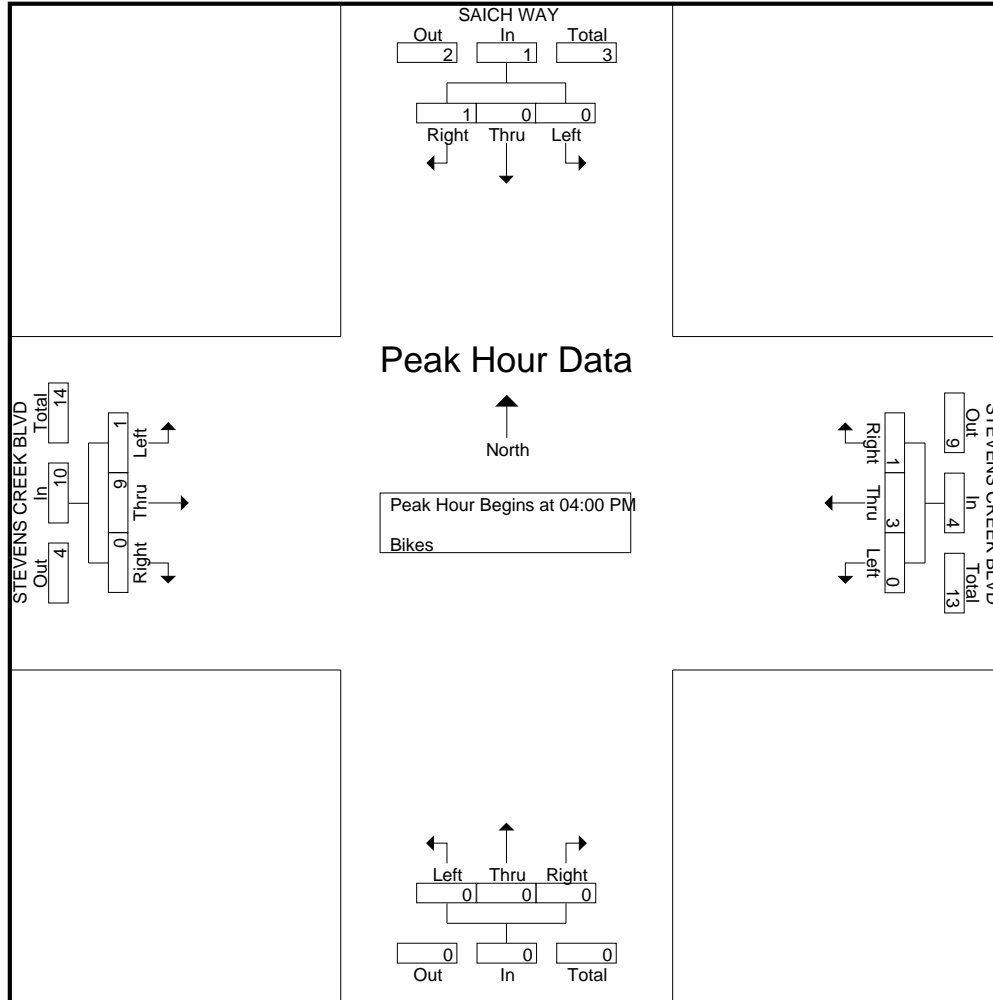



# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 7AM FINAL  
 Site Code : 00000007  
 Start Date : 2/23/2016  
 Page No : 1

## Groups Printed- Vehicles

Start Time	BANDLEY DR Southbound					STEVENS CREEK BLVD Westbound					DRIVEWAY Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
07:00 AM	5	0	4	3	12	5	133	8	1	147	2	0	13	1	16	6	44	2	1	53	228
07:15 AM	5	1	2	4	12	18	192	6	1	217	3	0	6	2	11	8	65	9	0	82	322
07:30 AM	3	1	1	0	5	21	210	4	1	236	4	4	12	3	23	11	77	8	0	96	360
07:45 AM	8	0	4	0	12	26	239	6	1	272	2	4	13	2	21	8	121	7	1	137	442
Total	21	2	11	7	41	70	774	24	4	872	11	8	44	8	71	33	307	26	2	368	1352
08:00 AM	15	3	7	5	30	25	284	8	0	317	2	4	17	1	24	12	113	10	1	136	507
08:15 AM	8	3	7	7	25	47	349	5	2	403	6	1	22	5	34	7	137	15	3	162	624
08:30 AM	8	2	9	3	22	62	314	5	0	381	2	3	20	2	27	10	138	15	0	163	593
08:45 AM	11	5	9	7	32	51	273	19	3	346	5	4	15	0	24	18	164	24	0	206	608
Total	42	13	32	22	109	185	1220	37	5	1447	15	12	74	8	109	47	552	64	4	667	2332
Grand Total	63	15	43	29	150	255	1994	61	9	2319	26	20	118	16	180	80	859	90	6	1035	3684
Apprch %	42	10	28.7	19.3		11	86	2.6	0.4		14.4	11.1	65.6	8.9		7.7	83	8.7	0.6		
Total %	1.7	0.4	1.2	0.8	4.1	6.9	54.1	1.7	0.2	62.9	0.7	0.5	3.2	0.4	4.9	2.2	23.3	2.4	0.2	28.1	

Start Time	BANDLEY DR Southbound				App. Total	STEVENS CREEK BLVD Westbound				App. Total	DRIVEWAY Northbound				App. Total	STEVENS CREEK BLVD Eastbound				Int. Total
	Right	Thru	Left	Peds		Right	Thru	Left	Peds		Right	Thru	Left	Peds		Right	Thru	Left	Peds	
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																				
Peak Hour for Entire Intersection Begins at 08:00 AM																				
08:00 AM	15	3	7	5	25	25	284	8	0	317	2	4	17	23	12	113	10	1	135	500
08:15 AM	8	3	7	7	18	47	349	5	2	401	6	1	22	29	7	137	15	3	159	607
08:30 AM	8	2	9	3	19	62	314	5	0	381	2	3	20	25	10	138	15	0	163	588
08:45 AM	11	5	9	7	25	51	273	19	3	343	5	4	15	24	18	164	24	0	206	598
Total Volume	42	13	32	22	87	185	1220	37	5	1442	15	12	74	101	47	552	64	4	663	2293
% App. Total	48.3	14.9	36.8	25.0		12.8	84.6	2.6	0.4		14.9	11.9	73.3		7.1	83.3	9.7	0.6		
PHF	.700	.650	.889	.870		.746	.874	.487	.899		.625	.750	.841	.871	.653	.841	.667	.805		.944

# Traffic Data Service


Campbell, CA  
 (408) 377-2988  
*idsbay@cs.com*

File Name : 7AM FINAL

Site Code : 00000007

Start Date : 2/23/2016

Page No : 2

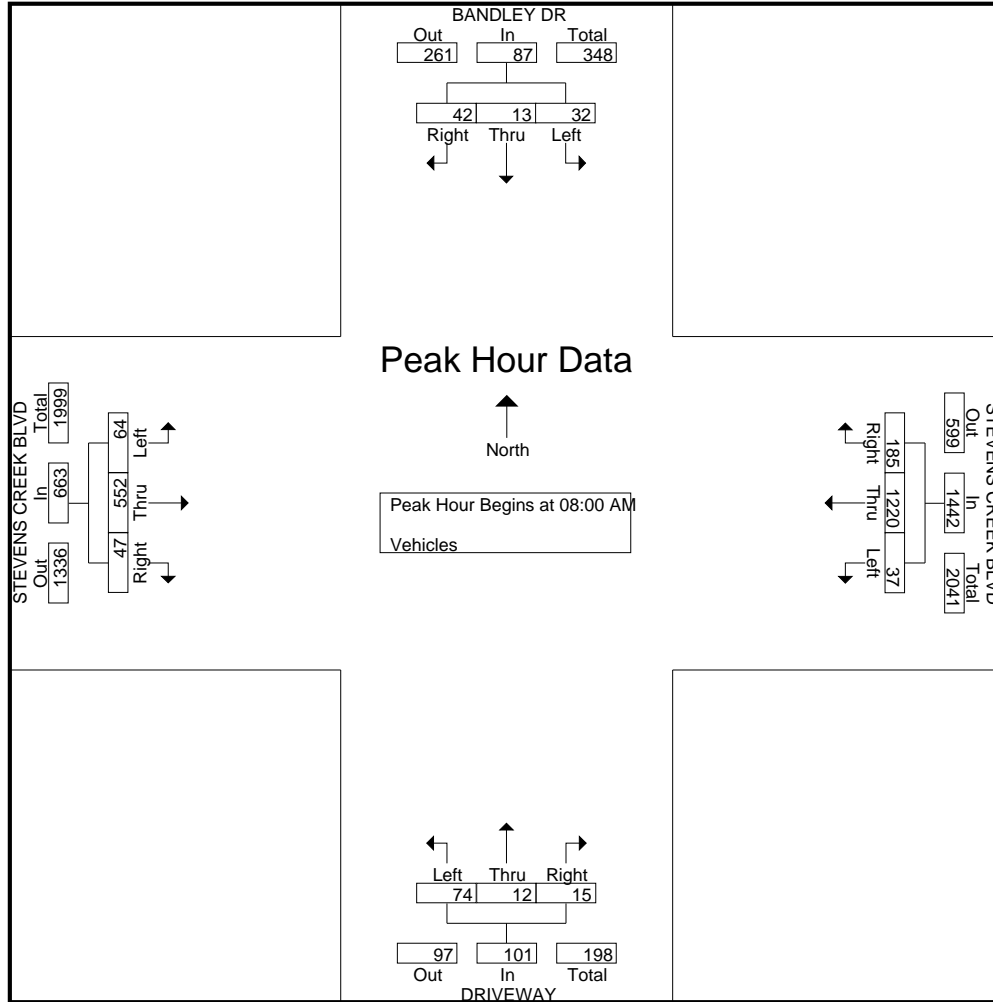

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 7AM FINAL  
 Site Code : 00000007  
 Start Date : 2/23/2016  
 Page No : 1

Groups Printed- Bikes

Start Time	BANDLEY DR Southbound					STEVENS CREEK BLVD Westbound					DRIVEWAY Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
07:00 AM	1	0	0	0	1	1	1	0	0	2	0	0	0	0	0	0	0	0	0	0	3
07:15 AM	0	0	0	0	0	0	3	0	0	3	0	0	0	0	0	0	1	0	0	1	4
07:30 AM	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	1
07:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3	0	0	3	3
<b>Total</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>1</b>	<b>5</b>	<b>0</b>	<b>0</b>	<b>6</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>0</b>	<b>4</b>	<b>11</b>
08:00 AM	0	0	1	0	1	0	4	0	0	4	0	0	0	0	0	0	2	0	0	2	7
08:15 AM	0	0	0	0	0	1	5	0	0	6	0	1	0	0	1	1	1	0	0	2	9
08:30 AM	0	0	0	0	0	0	1	0	0	1	1	0	0	0	1	0	1	0	0	1	3
08:45 AM	0	0	0	0	0	2	0	0	0	2	0	0	0	0	0	0	3	0	0	3	5
<b>Total</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>1</b>	<b>3</b>	<b>10</b>	<b>0</b>	<b>0</b>	<b>13</b>	<b>1</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>2</b>	<b>1</b>	<b>7</b>	<b>0</b>	<b>0</b>	<b>8</b>	<b>24</b>
Grand Total	1	0	1	0	2	4	15	0	0	19	1	1	0	0	2	1	11	0	0	12	35
Apprch %	50	0	50	0		21.1	78.9	0	0		50	50	0	0		8.3	91.7	0	0		
Total %	2.9	0	2.9	0	5.7	11.4	42.9	0	0	54.3	2.9	2.9	0	0	5.7	2.9	31.4	0	0	34.3	

Start Time	BANDLEY DR Southbound				STEVENS CREEK BLVD Westbound				DRIVEWAY Northbound				STEVENS CREEK BLVD Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 08:00 AM																	
08:00 AM	0	0	1	1	0	4	0	4	0	0	0	0	0	2	0	2	7
08:15 AM	0	0	0	0	1	5	0	6	0	1	0	1	1	1	0	2	9
08:30 AM	0	0	0	0	0	1	0	1	1	0	0	1	0	1	0	1	3
08:45 AM	0	0	0	0	2	0	0	2	0	0	0	0	0	3	0	3	5
Total Volume	0	0	1	1	3	10	0	13	1	1	0	2	1	7	0	8	24
% App. Total	0	0	100		23.1	76.9	0		50	50	0		12.5	87.5	0		
PHF	.000	.000	.250	.250	.375	.500	.000	.542	.250	.250	.000	.500	.250	.583	.000	.667	.667

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 7AM FINAL

Site Code : 00000007

Start Date : 2/23/2016

Page No : 2

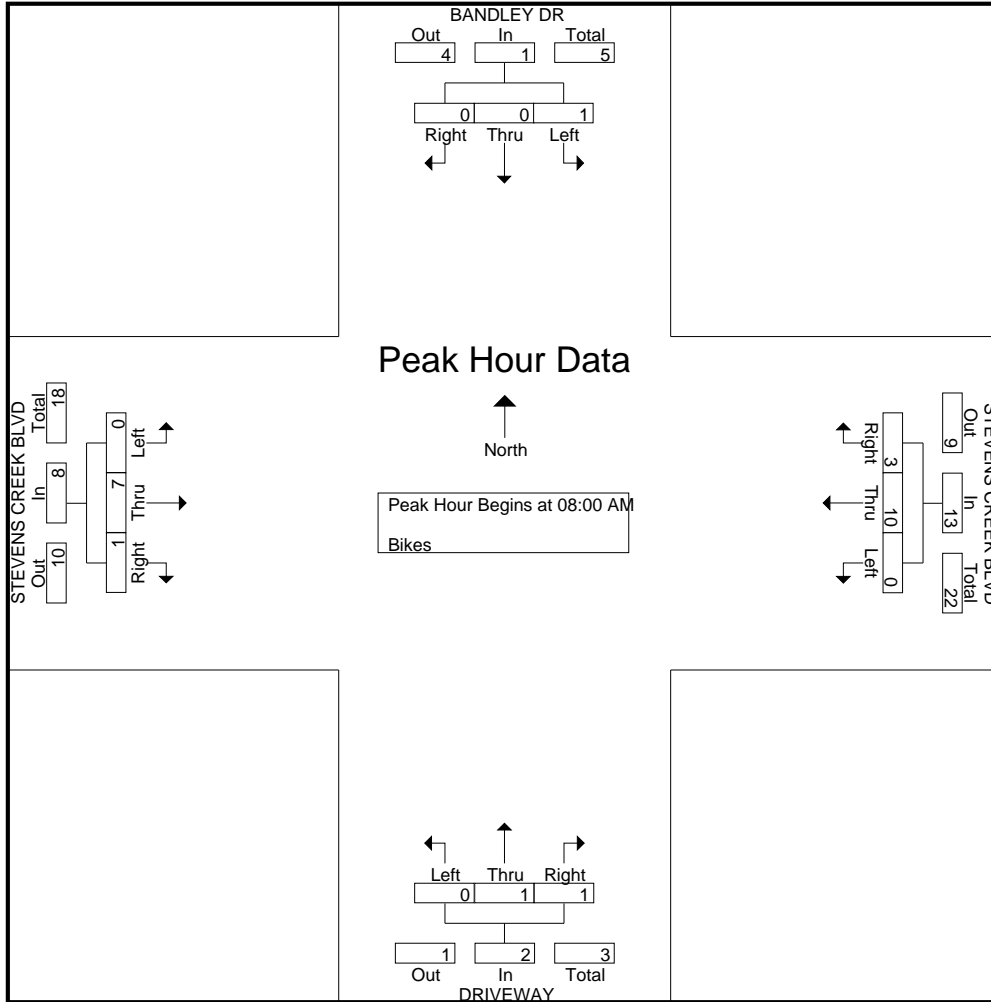

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 7PM FINAL  
 Site Code : 00000007  
 Start Date : 2/23/2016  
 Page No : 1

## Groups Printed- Vehicles

Start Time	BANDLEY DR Southbound					STEVENS CREEK BLVD Westbound					DRIVEWAY Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	24	5	28	8	65	24	206	29	7	266	20	4	18	3	45	10	290	31	3	334	710
04:15 PM	26	9	31	9	75	17	254	29	5	305	12	5	15	4	36	18	307	31	2	358	774
04:30 PM	19	3	27	16	65	18	201	33	9	261	8	5	20	2	35	16	291	40	4	351	712
04:45 PM	19	8	32	11	70	25	245	27	3	300	10	7	27	1	45	23	329	27	1	380	795
<b>Total</b>	<b>88</b>	<b>25</b>	<b>118</b>	<b>44</b>	<b>275</b>	<b>84</b>	<b>906</b>	<b>118</b>	<b>24</b>	<b>1132</b>	<b>50</b>	<b>21</b>	<b>80</b>	<b>10</b>	<b>161</b>	<b>67</b>	<b>1217</b>	<b>129</b>	<b>10</b>	<b>1423</b>	<b>2991</b>
05:00 PM	34	8	30	5	77	23	227	35	2	287	14	7	20	3	44	12	321	34	4	371	779
05:15 PM	24	4	21	2	51	28	253	27	3	311	12	6	18	3	39	14	379	37	0	430	831
05:30 PM	36	6	44	4	90	29	262	23	1	315	14	7	24	2	47	20	361	27	3	411	863
05:45 PM	30	9	32	5	76	28	237	39	6	310	13	3	20	2	38	19	376	35	0	430	854
<b>Total</b>	<b>124</b>	<b>27</b>	<b>127</b>	<b>16</b>	<b>294</b>	<b>108</b>	<b>979</b>	<b>124</b>	<b>12</b>	<b>1223</b>	<b>53</b>	<b>23</b>	<b>82</b>	<b>10</b>	<b>168</b>	<b>65</b>	<b>1437</b>	<b>133</b>	<b>7</b>	<b>1642</b>	<b>3327</b>
Grand Total	212	52	245	60	569	192	1885	242	36	2355	103	44	162	20	329	132	2654	262	17	3065	6318
Apprch %	37.3	9.1	43.1	10.5		8.2	80	10.3	1.5		31.3	13.4	49.2	6.1		4.3	86.6	8.5	0.6		
Total %	3.4	0.8	3.9	0.9	9	3	29.8	3.8	0.6	37.3	1.6	0.7	2.6	0.3	5.2	2.1	42	4.1	0.3	48.5	

Start Time	BANDLEY DR Southbound				App. Total	STEVENS CREEK BLVD Westbound				App. Total	DRIVEWAY Northbound				App. Total	STEVENS CREEK BLVD Eastbound				Int. Total	
	Right	Thru	Left	Peds		Right	Thru	Left	Peds		Right	Thru	Left	Peds		Right	Thru	Left	Peds		
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 05:00 PM																					
05:00 PM	34	8	30	5	72	23	227	35	2	285	14	7	20	3	41	12	321	34	4	367	765
05:15 PM	24	4	21	2	49	28	253	27	3	308	12	6	18	3	36	14	<b>379</b>	<b>37</b>	<b>430</b>	823	
05:30 PM	<b>36</b>	<b>6</b>	<b>44</b>	<b>4</b>	<b>86</b>	<b>29</b>	<b>262</b>	<b>23</b>	<b>1</b>	<b>314</b>	<b>14</b>	<b>7</b>	<b>24</b>	<b>2</b>	<b>45</b>	<b>20</b>	361	27	3	408	<b>853</b>
05:45 PM	30	9	32	5	71	28	237	39	6	304	13	3	20	2	36	19	376	35	0	430	841
Total Volume	124	27	127	16	278	108	979	124	12	1211	53	23	82	10	158	65	1437	133	7	1635	3282
% App. Total	44.6	9.7	45.7	5.8		8.9	80.8	10.2	1.5		33.5	14.6	51.9	6.1		4	87.9	8.1	0.6		
PHF	.861	.750	.722	.808		.931	.934	.795	.964		.946	.821	.854	.878		.813	.948	.899	.951		.962

# Traffic Data Service


Campbell, CA  
 (408) 377-2988  
*tdsbay@cs.com*

File Name : 7PM FINAL

Site Code : 00000007

Start Date : 2/23/2016

Page No : 2

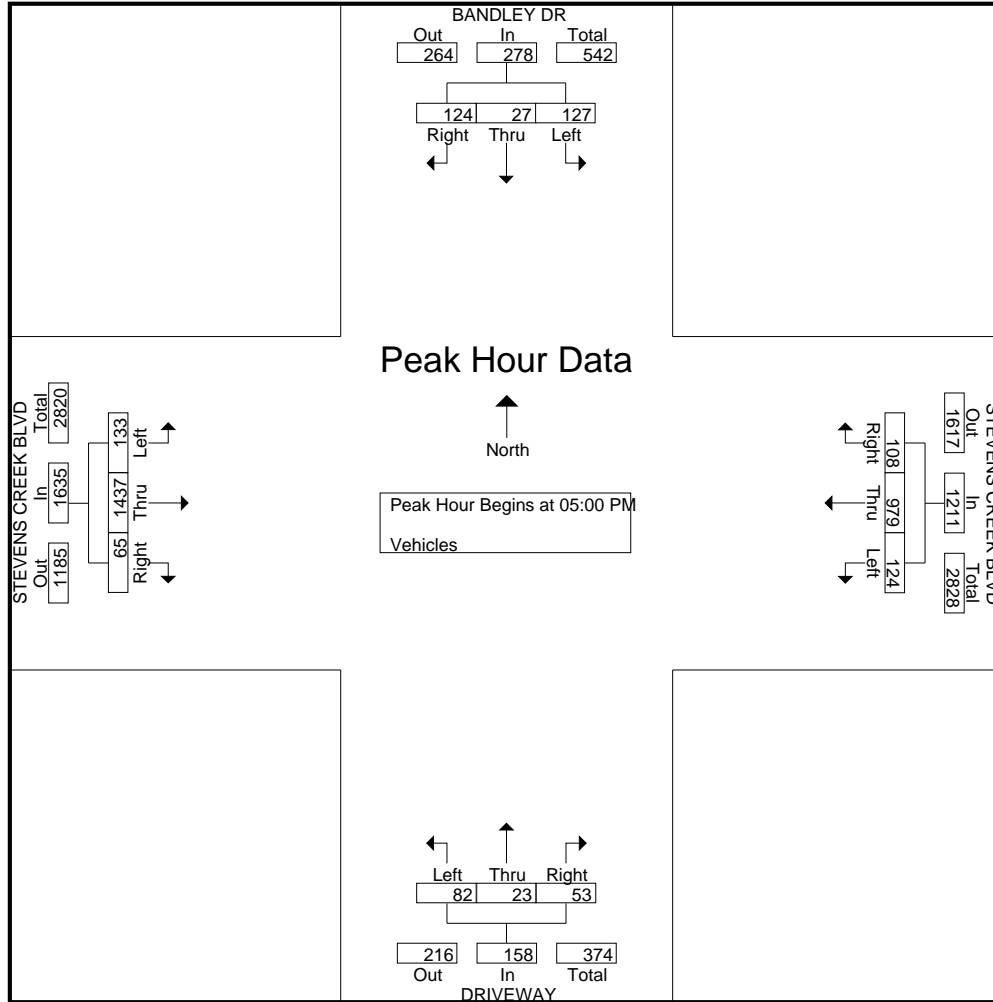

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 7PM FINAL  
 Site Code : 00000007  
 Start Date : 2/23/2016  
 Page No : 1

Groups Printed- Bikes

Start Time	BANDLEY DR Southbound					STEVENS CREEK BLVD Westbound					DRIVEWAY Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	1
04:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
04:30 PM	1	0	0	0	1	0	2	0	0	2	0	0	0	0	0	1	0	0	0	1	4
04:45 PM	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	1	0	0	1	2
<b>Total</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>2</b>	<b>0</b>	<b>0</b>	<b>3</b>	<b>7</b>
05:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4	0	0	4	4
05:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	1
05:30 PM	0	0	0	0	0	0	3	0	0	3	0	0	0	0	0	0	1	0	0	1	4
05:45 PM	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	1	0	0	1	2
<b>Total</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>7</b>	<b>0</b>	<b>0</b>	<b>7</b>	<b>11</b>
Grand Total	1	0	0	0	1	0	7	0	0	7	0	0	0	0	0	1	9	0	0	10	18
Apprch %	100	0	0	0		0	100	0	0		0	0	0	0		10	90	0	0		
Total %	5.6	0	0	0	5.6	0	38.9	0	0	38.9	0	0	0	0	0	5.6	50	0	0	55.6	

Start Time	BANDLEY DR Southbound				STEVENS CREEK BLVD Westbound				DRIVEWAY Northbound				STEVENS CREEK BLVD Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:30 PM																	
04:30 PM	1	0	0	1	0	2	0	2	0	0	0	0	1	0	0	1	4
04:45 PM	0	0	0	0	0	1	0	1	0	0	0	0	0	1	0	1	2
05:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	4	0	4	4
05:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1
Total Volume	1	0	0	1	0	3	0	3	0	0	0	0	1	6	0	7	11
% App. Total	100	0	0		0	100	0		0	0	0		14.3	85.7	0		
PHF	.250	.000	.000	.250	.000	.375	.000	.375	.000	.000	.000	.000	.250	.375	.000	.438	.688

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 7PM FINAL

Site Code : 00000007

Start Date : 2/23/2016

Page No : 2

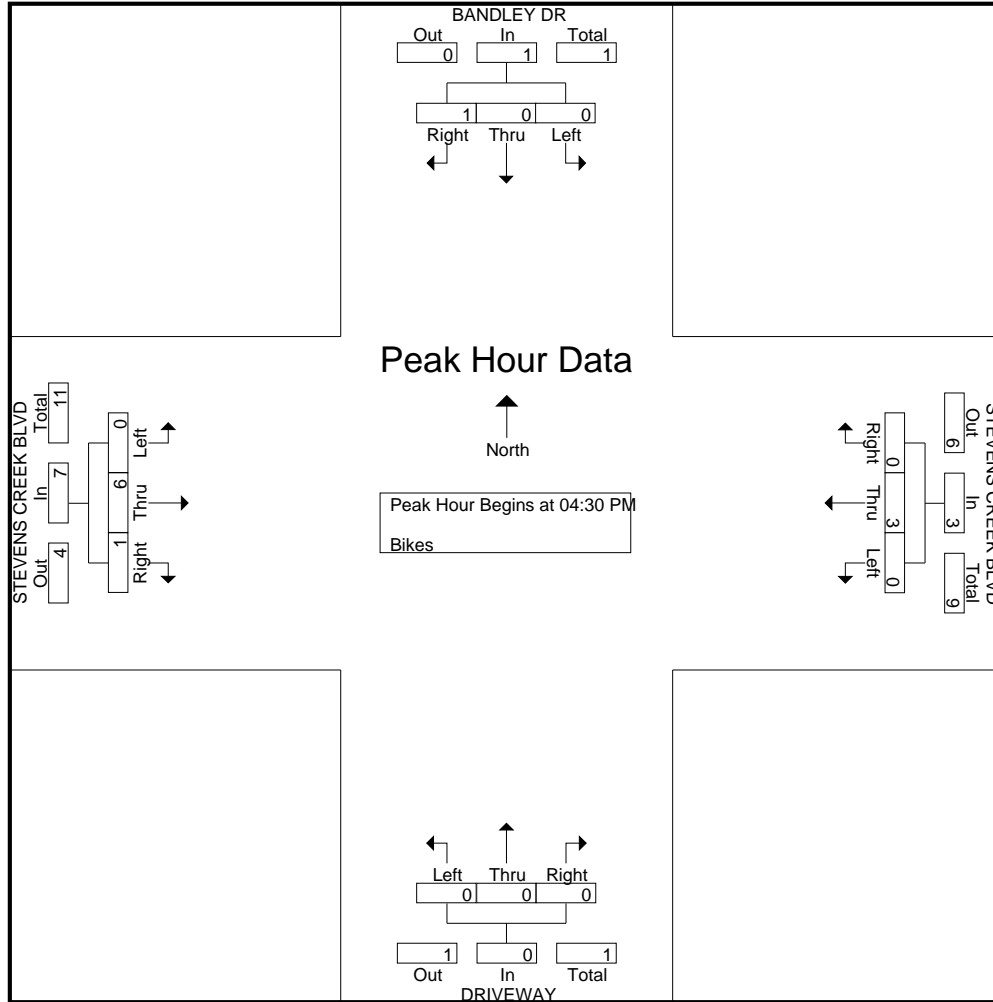



# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 6AM FINAL  
 Site Code : 00000006  
 Start Date : 3/26/2015  
 Page No : 1

## Groups Printed- Vehicles


Start Time	N DE ANZA BLVD Southbound					STEVENS CREEK BLVD Westbound					S DE ANZA BLVD Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
07:00 AM	22	65	37	4	128	20	43	24	10	97	24	197	36	2	259	10	19	25	3	57	541
07:15 AM	34	85	36	1	156	34	76	32	0	142	22	267	69	6	364	13	36	22	7	78	740
07:30 AM	16	81	53	3	153	44	89	44	7	184	33	347	89	4	473	19	39	41	1	100	910
07:45 AM	33	139	70	2	244	62	133	49	2	246	29	426	106	14	575	24	44	48	1	117	1182
Total	105	370	196	10	681	160	341	149	19	669	108	1237	300	26	1671	66	138	136	12	352	3373
08:00 AM	47	185	104	10	346	61	133	55	7	256	38	447	111	7	603	21	70	50	6	147	1352
08:15 AM	54	187	89	7	337	53	166	78	9	306	40	393	119	11	563	24	74	43	3	144	1350
08:30 AM	44	127	102	11	284	84	155	56	10	305	56	509	162	12	739	18	85	51	6	160	1488
08:45 AM	63	159	103	8	333	94	180	53	21	348	52	460	151	16	679	35	91	47	2	175	1535
Total	208	658	398	36	1300	292	634	242	47	1215	186	1809	543	46	2584	98	320	191	17	626	5725
09:00 AM	65	101	110	11	287	92	222	61	8	383	47	366	132	12	557	37	129	48	5	219	1446
09:15 AM	33	135	96	8	272	76	143	51	4	274	54	341	133	18	546	37	97	52	0	186	1278
09:30 AM	35	137	106	10	288	72	146	37	16	271	36	275	110	7	428	41	136	51	12	240	1227
09:45 AM	53	155	95	21	324	62	111	61	10	244	39	246	101	11	397	48	113	45	6	212	1177
Total	186	528	407	50	1171	302	622	210	38	1172	176	1228	476	48	1928	163	475	196	23	857	5128
Grand Total	499	1556	1001	96	3152	754	1597	601	104	3056	470	4274	1319	120	6183	327	933	523	52	1835	14226
Apprch %	15.8	49.4	31.8	3		24.7	52.3	19.7	3.4		7.6	69.1	21.3	1.9		17.8	50.8	28.5	2.8		
Total %	3.5	10.9	7	0.7	22.2	5.3	11.2	4.2	0.7	21.5	3.3	30	9.3	0.8	43.5	2.3	6.6	3.7	0.4	12.9	

Start Time	N DE ANZA BLVD Southbound				STEVENS CREEK BLVD Westbound				S DE ANZA BLVD Northbound				STEVENS CREEK BLVD Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 07:00 AM to 09:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 08:15 AM																	
08:15 AM	54	<b>187</b>	89	<b>330</b>	53	166	<b>78</b>	297	40	393	119	552	24	74	43	141	1320
08:30 AM	44	127	102	273	84	155	56	295	<b>56</b>	<b>509</b>	<b>162</b>	<b>727</b>	18	85	<b>51</b>	154	1449
08:45 AM	63	159	103	325	<b>94</b>	180	53	327	52	460	151	663	35	91	47	173	<b>1488</b>
09:00 AM	<b>65</b>	101	<b>110</b>	276	92	<b>222</b>	61	<b>375</b>	47	366	132	545	<b>37</b>	<b>129</b>	48	<b>214</b>	1410
Total Volume	226	574	404	1204	323	723	248	1294	195	1728	564	2487	114	379	189	682	5667
% App. Total	18.8	47.7	33.6		25	55.9	19.2		7.8	69.5	22.7		16.7	55.6	27.7		
PHF	.869	.767	.918	.912	.859	.814	.795	.863	.871	.849	.870	.855	.770	.734	.926	.797	.952

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
*tdsbay@cs.com*

File Name : 6AM FINAL  
 Site Code : 00000006  
 Start Date : 3/26/2015  
 Page No : 2

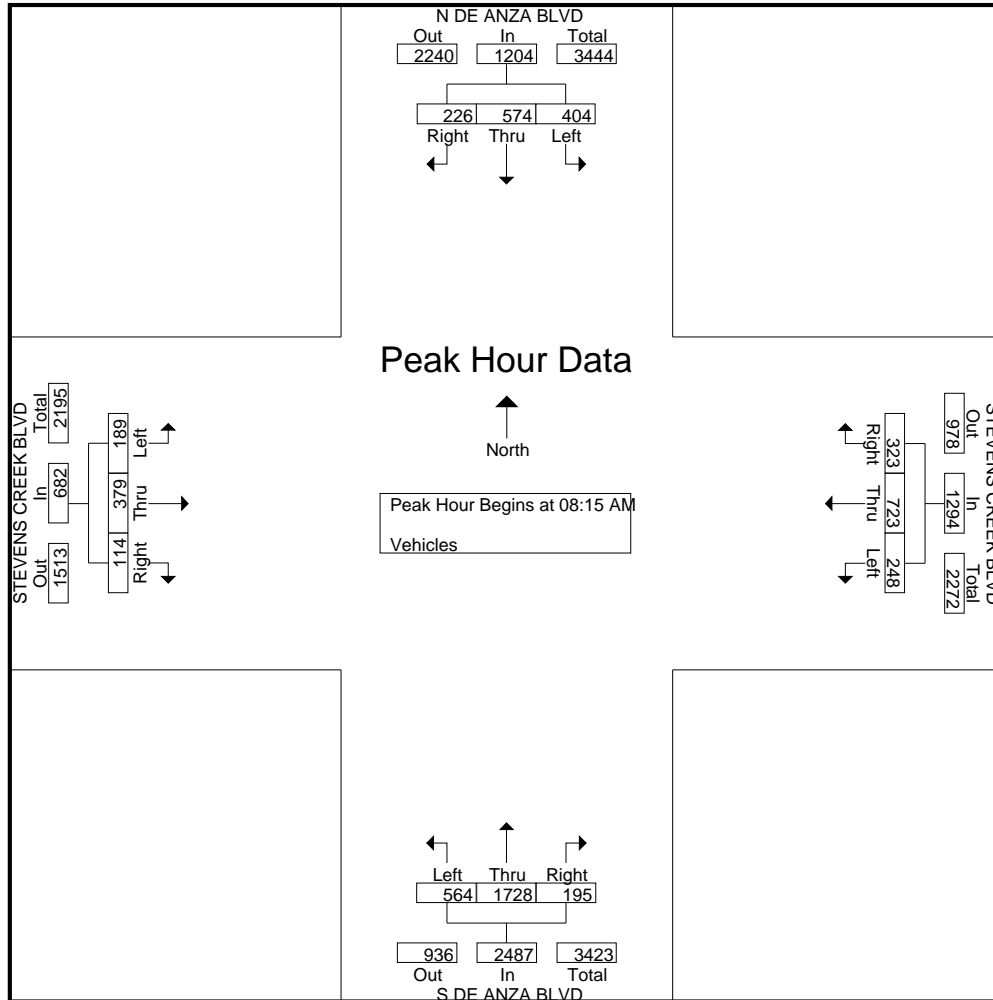

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 6AM FINAL  
 Site Code : 00000006  
 Start Date : 3/26/2015  
 Page No : 1

Groups Printed- Bikes

Start Time	N DE ANZA BLVD Southbound					STEVENS CREEK BLVD Westbound					S DE ANZA BLVD Northbound					STEVENS CREEK BLVD Eastbound					Int. Total	
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total		
07:00 AM	0	0	0	0	0	0	1	0	0	1	0	2	0	0	2	0	0	0	0	0	0	3
07:15 AM	0	0	0	0	0	0	0	1	0	1	0	1	0	0	1	0	2	0	0	2	0	4
07:30 AM	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	1	0	0	1	0	2
07:45 AM	0	0	0	0	0	0	1	0	0	1	0	2	0	0	2	0	1	0	0	1	0	4
<b>Total</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>3</b>	<b>1</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>5</b>	<b>0</b>	<b>0</b>	<b>5</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>0</b>	<b>4</b>	<b>13</b>	
08:00 AM	0	1	0	0	1	0	2	0	0	2	0	4	0	0	4	0	1	0	0	1	0	8
08:15 AM	0	2	0	0	2	0	1	0	0	1	0	0	0	0	0	0	3	1	0	5	0	8
08:30 AM	0	1	0	0	1	0	0	0	0	0	0	7	0	0	7	0	1	0	0	1	0	9
08:45 AM	0	3	0	0	3	0	0	0	0	0	0	3	0	0	3	0	5	0	0	5	0	11
<b>Total</b>	<b>0</b>	<b>7</b>	<b>0</b>	<b>0</b>	<b>7</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>14</b>	<b>0</b>	<b>0</b>	<b>14</b>	<b>1</b>	<b>10</b>	<b>1</b>	<b>0</b>	<b>12</b>	<b>36</b>	
09:00 AM	0	0	2	1	3	0	1	0	0	1	0	1	0	0	1	0	0	0	0	0	0	5
09:15 AM	0	0	2	0	2	1	0	0	0	1	0	3	0	0	3	0	0	1	0	1	0	7
09:30 AM	0	0	1	0	1	0	4	0	0	4	0	1	0	0	1	0	0	0	0	0	0	6
09:45 AM	0	2	0	0	2	2	1	0	0	3	0	0	0	0	0	0	0	0	0	0	0	5
<b>Total</b>	<b>0</b>	<b>2</b>	<b>5</b>	<b>1</b>	<b>8</b>	<b>3</b>	<b>6</b>	<b>0</b>	<b>0</b>	<b>9</b>	<b>0</b>	<b>5</b>	<b>0</b>	<b>0</b>	<b>5</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>1</b>	<b>23</b>	
Grand Total	0	9	5	1	15	3	12	1	0	16	0	24	0	0	24	1	14	2	0	17	72	
Apprch %	0	60	33.3	6.7		18.8	75	6.2	0		0	100	0	0		5.9	82.4	11.8	0			
Total %	0	12.5	6.9	1.4	20.8	4.2	16.7	1.4	0	22.2	0	33.3	0	0	33.3	1.4	19.4	2.8	0	23.6		

Start Time	N DE ANZA BLVD Southbound				STEVENS CREEK BLVD Westbound				S DE ANZA BLVD Northbound				STEVENS CREEK BLVD Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 07:00 AM to 09:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 08:00 AM																	
08:00 AM	0	1	0	1	0	2	0	2	0	4	0	4	0	1	0	1	8
08:15 AM	0	2	0	2	0	1	0	1	0	0	0	0	1	3	1	5	8
08:30 AM	0	1	0	1	0	0	0	0	0	7	0	7	0	1	0	1	9
08:45 AM	0	3	0	3	0	0	0	0	0	3	0	3	0	5	0	5	11
Total Volume	0	7	0	7	0	3	0	3	0	14	0	14	1	10	1	12	36
% App. Total	0	100	0		0	100	0		0	100	0		8.3	83.3	8.3		
PHF	.000	.583	.000	.583	.000	.375	.000	.375	.000	.500	.000	.500	.250	.500	.250	.600	.818

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*idsbay@cs.com*

File Name : 6AM FINAL

Site Code : 00000006

Start Date : 3/26/2015

Page No : 2

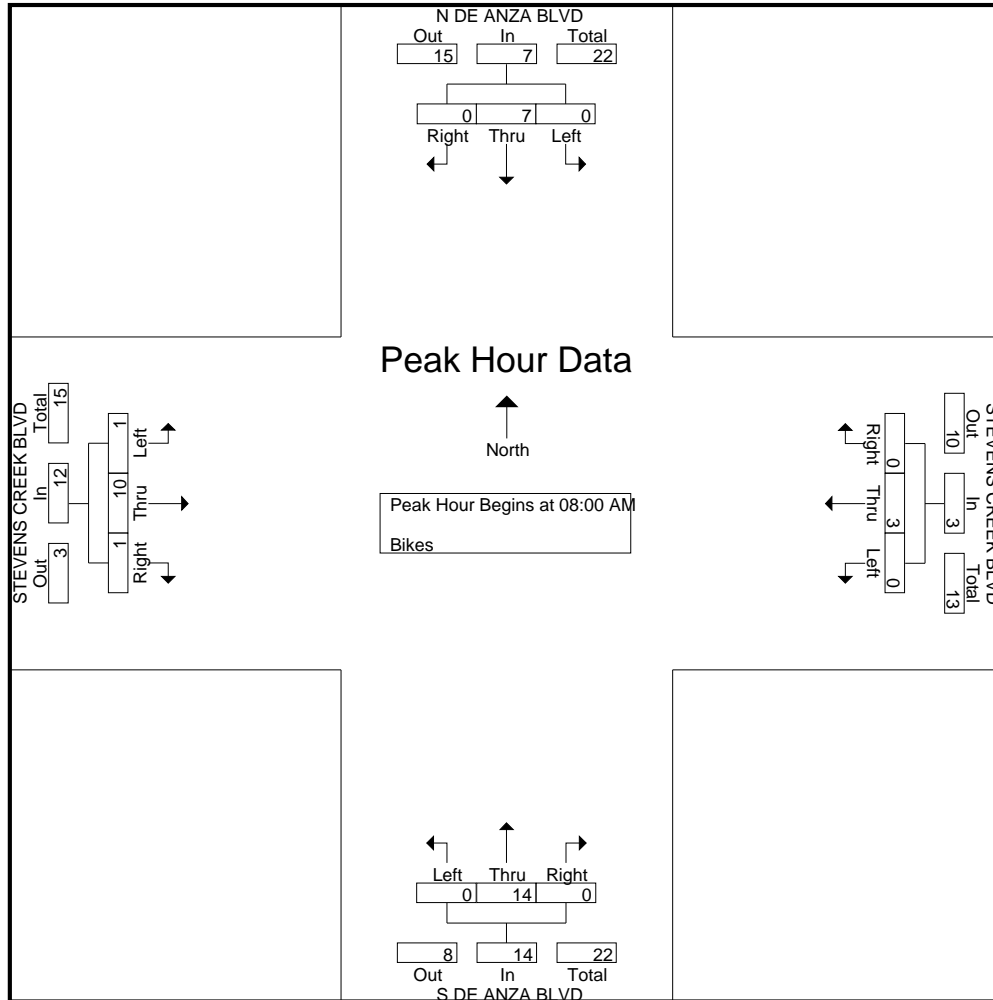

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 6PM FINAL  
 Site Code : 00000006  
 Start Date : 3/26/2015  
 Page No : 1

Groups Printed- Vehicles

Start Time	N DE ANZA BLVD Southbound					STEVENS CREEK BLVD Westbound					S DE ANZA BLVD Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	70	361	114	11	556	52	138	58	0	248	58	196	120	27	401	106	199	61	12	378	1583
04:15 PM	59	314	97	10	480	44	149	96	0	289	60	177	87	15	339	109	213	57	1	380	1488
04:30 PM	62	370	136	4	572	65	111	69	0	245	52	157	109	16	334	109	210	44	6	369	1520
04:45 PM	51	426	101	8	586	54	123	86	0	263	57	179	96	14	346	93	217	59	9	378	1573
<b>Total</b>	<b>242</b>	<b>1471</b>	<b>448</b>	<b>33</b>	<b>2194</b>	<b>215</b>	<b>521</b>	<b>309</b>	<b>0</b>	<b>1045</b>	<b>227</b>	<b>709</b>	<b>412</b>	<b>72</b>	<b>1420</b>	<b>417</b>	<b>839</b>	<b>221</b>	<b>28</b>	<b>1505</b>	<b>6164</b>
05:00 PM	62	425	137	7	631	67	153	87	7	314	61	199	113	10	383	119	252	42	6	419	1747
05:15 PM	67	529	124	7	727	57	121	75	7	260	62	244	119	9	434	105	248	48	6	407	1828
05:30 PM	57	462	126	12	657	77	154	104	15	350	64	194	94	16	368	118	274	55	12	459	1834
05:45 PM	73	506	143	10	732	58	159	93	7	317	80	204	126	18	428	103	220	52	11	386	1863
<b>Total</b>	<b>259</b>	<b>1922</b>	<b>530</b>	<b>36</b>	<b>2747</b>	<b>259</b>	<b>587</b>	<b>359</b>	<b>36</b>	<b>1241</b>	<b>267</b>	<b>841</b>	<b>452</b>	<b>53</b>	<b>1613</b>	<b>445</b>	<b>994</b>	<b>197</b>	<b>35</b>	<b>1671</b>	<b>7272</b>
06:00 PM	89	432	114	10	645	72	161	93	0	326	71	190	134	11	406	90	257	45	5	397	1774
06:15 PM	70	444	138	3	655	63	162	92	0	317	62	237	116	10	425	129	234	56	0	419	1816
06:30 PM	45	488	121	9	663	44	146	81	0	271	76	178	96	9	359	101	188	43	12	344	1637
06:45 PM	77	390	140	4	611	53	145	77	0	275	47	169	100	5	321	99	189	54	9	351	1558
<b>Total</b>	<b>281</b>	<b>1754</b>	<b>513</b>	<b>26</b>	<b>2574</b>	<b>232</b>	<b>614</b>	<b>343</b>	<b>0</b>	<b>1189</b>	<b>256</b>	<b>774</b>	<b>446</b>	<b>35</b>	<b>1511</b>	<b>419</b>	<b>868</b>	<b>198</b>	<b>26</b>	<b>1511</b>	<b>6785</b>
Grand Total	782	5147	1491	95	7515	706	1722	1011	36	3475	750	2324	1310	160	4544	1281	2701	616	89	4687	20221
Apprch %	10.4	68.5	19.8	1.3		20.3	49.6	29.1	1		16.5	51.1	28.8	3.5		27.3	57.6	13.1	1.9		
Total %	3.9	25.5	7.4	0.5	37.2	3.5	8.5	5	0.2	17.2	3.7	11.5	6.5	0.8	22.5	6.3	13.4	3	0.4	23.2	

Start Time	N DE ANZA BLVD Southbound				STEVENS CREEK BLVD Westbound				S DE ANZA BLVD Northbound				STEVENS CREEK BLVD Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 04:00 PM to 06:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 05:30 PM																	
05:30 PM	57	462	126	645	77	154	104	335	64	194	94	352	118	274	55	447	1779
05:45 PM	73	506	143	722	58	159	93	310	80	204	126	410	103	220	52	375	1817
06:00 PM	89	432	114	635	72	161	93	326	71	190	134	395	90	257	45	392	1748
06:15 PM	70	444	138	652	63	162	92	317	62	237	116	415	129	234	56	419	1803
Total Volume	289	1844	521	2654	270	636	382	1288	277	825	470	1572	440	985	208	1633	7147
% App. Total	10.9	69.5	19.6		21	49.4	29.7		17.6	52.5	29.9		26.9	60.3	12.7		
PHF	.812	.911	.911	.919	.877	.981	.918	.961	.866	.870	.877	.947	.853	.899	.929	.913	.983

# Traffic Data Service


Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 6PM FINAL

Site Code : 00000006

Start Date : 3/26/2015

Page No : 2

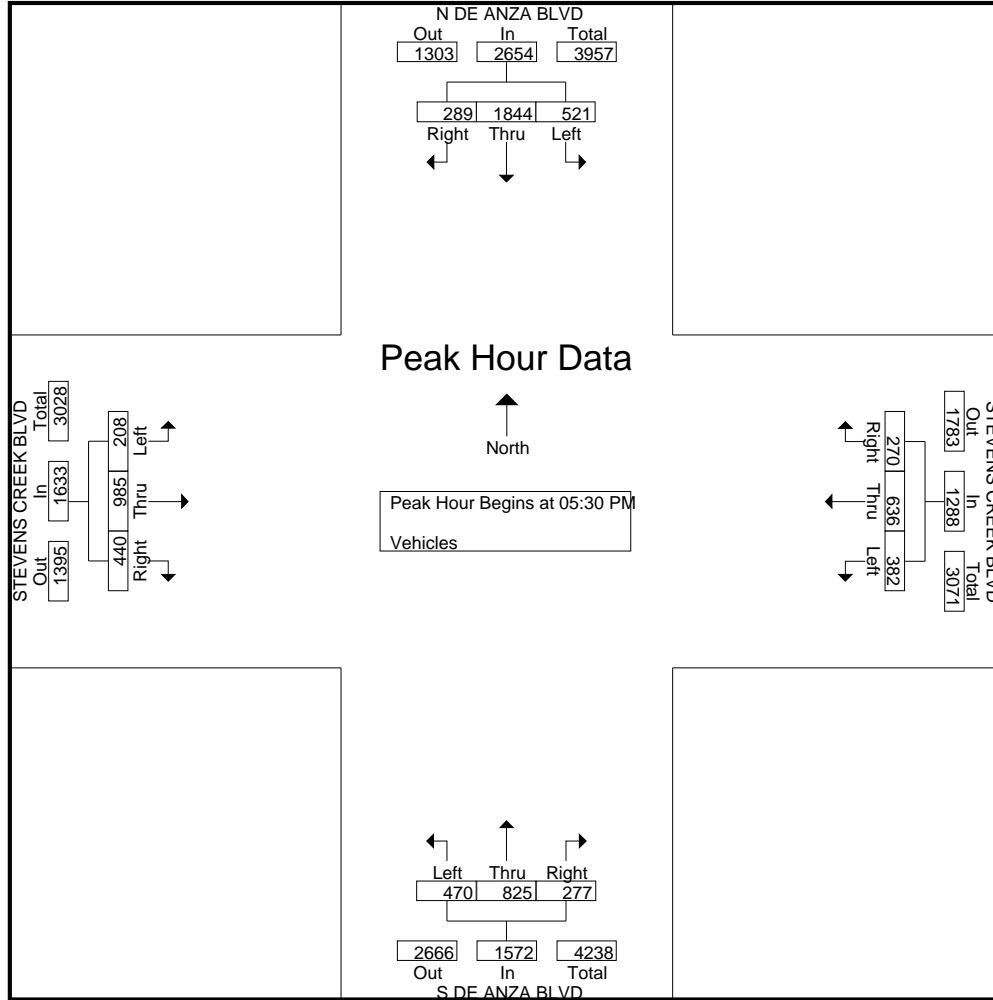

# Traffic Data Service

Campbell, CA  
 (408) 377-2988  
 tdsbay@cs.com

File Name : 6PM FINAL  
 Site Code : 00000006  
 Start Date : 3/26/2015  
 Page No : 1

Groups Printed- Bikes

Start Time	N DE ANZA BLVD Southbound					STEVENS CREEK BLVD Westbound					S DE ANZA BLVD Northbound					STEVENS CREEK BLVD Eastbound					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	0	0	0	0	0	1	1	0	0	2	0	0	0	0	0	0	1	0	0	1	3
04:15 PM	0	0	0	0	0	1	0	0	0	1	0	0	0	0	0	0	1	0	0	1	2
04:30 PM	0	2	0	0	2	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	3
04:45 PM	0	1	0	0	1	0	0	1	0	1	0	1	0	0	1	0	5	0	0	5	8
<b>Total</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>0</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>1</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>8</b>	<b>0</b>	<b>0</b>	<b>8</b>	<b>16</b>
05:00 PM	0	1	0	0	1	0	2	0	0	2	0	0	1	0	1	0	3	0	0	3	7
05:15 PM	0	3	0	0	3	0	3	0	0	3	0	1	0	0	1	1	2	0	0	3	10
05:30 PM	1	3	0	0	4	0	2	0	0	2	0	0	0	0	0	0	1	0	0	1	7
05:45 PM	0	0	0	0	0	0	3	1	0	4	0	3	0	0	3	0	2	0	0	2	9
<b>Total</b>	<b>1</b>	<b>7</b>	<b>0</b>	<b>0</b>	<b>8</b>	<b>0</b>	<b>10</b>	<b>1</b>	<b>0</b>	<b>11</b>	<b>0</b>	<b>4</b>	<b>1</b>	<b>0</b>	<b>5</b>	<b>1</b>	<b>8</b>	<b>0</b>	<b>0</b>	<b>9</b>	<b>33</b>
06:00 PM	0	2	0	0	2	0	1	0	0	1	0	2	0	0	2	0	1	0	0	1	6
06:15 PM	0	2	0	0	2	0	0	0	0	0	0	3	0	0	3	0	0	0	0	0	5
06:30 PM	0	1	1	0	2	1	0	0	0	1	0	2	0	0	2	0	0	1	0	1	6
06:45 PM	0	1	0	0	1	0	0	0	0	0	0	1	0	0	1	0	1	0	0	1	3
<b>Total</b>	<b>0</b>	<b>6</b>	<b>1</b>	<b>0</b>	<b>7</b>	<b>1</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>2</b>	<b>0</b>	<b>8</b>	<b>0</b>	<b>0</b>	<b>8</b>	<b>0</b>	<b>2</b>	<b>1</b>	<b>0</b>	<b>3</b>	<b>20</b>
Grand Total	1	16	1	0	18	3	12	2	0	17	0	13	1	0	14	1	18	1	0	20	69
Apprch %	5.6	88.9	5.6	0		17.6	70.6	11.8	0		0	92.9	7.1	0		5	90	5	0		
Total %	1.4	23.2	1.4	0	26.1	4.3	17.4	2.9	0	24.6	0	18.8	1.4	0	20.3	1.4	26.1	1.4	0	29	

Start Time	N DE ANZA BLVD Southbound				STEVENS CREEK BLVD Westbound				S DE ANZA BLVD Northbound				STEVENS CREEK BLVD Eastbound				Int. Total
	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	
Peak Hour Analysis From 04:00 PM to 06:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 05:00 PM																	
05:00 PM	0	1	0	1	0	2	0	2	0	0	1	1	0	3	0	3	7
05:15 PM	0	3	0	3	0	3	0	3	0	1	0	1	1	2	0	3	10
05:30 PM	1	3	0	4	0	2	0	2	0	0	0	0	0	1	0	1	7
05:45 PM	0	0	0	0	0	3	1	4	0	3	0	3	0	2	0	2	9
Total Volume	1	7	0	8	0	10	1	11	0	4	1	5	1	8	0	9	33
% App. Total	12.5	87.5	0		0	90.9	9.1		0	80	20		11.1	88.9	0		
PHF	.250	.583	.000	.500	.000	.833	.250	.688	.000	.333	.250	.417	.250	.667	.000	.750	.825

# Traffic Data Service


Campbell, CA  
(408) 377-2988  
*tdsbay@cs.com*

File Name : 6PM FINAL

Site Code : 00000006

Start Date : 3/26/2015

Page No : 2

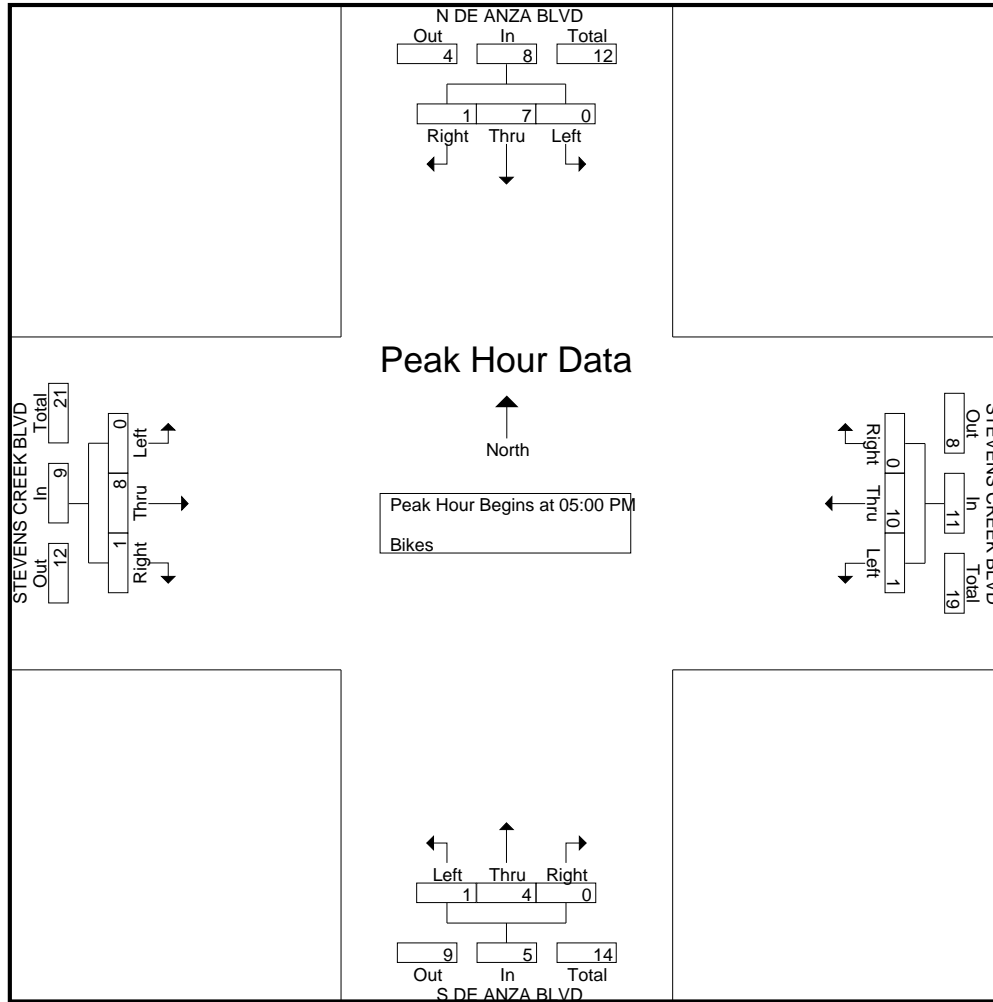



**APPENDIX B: EXISTING AND EXISTING PLUS PROJECT INTERSECTION  
LEVEL OF SERVICE CALCULATIONS**



Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM

Summary Scenario Comparison Report (With Average Critical Delay)  
Future Volume Alternative

Intersection	???				Existing AM				Existing PP AM					???				
	LOS	Avg Del (sec)	Crit V/C	Avg Crit Del (sec)	LOS	Avg Del (sec)	Crit V/C	Avg Crit Del (sec)	LOS	Avg Del (sec)	Crit V/C	Crit V/C Change	Avg Crit Del (sec)	Avg Crit Del Change	LOS	Avg Del (sec)	Crit V/C	Avg Crit Del (sec)
#1 De Anza Boulevard and Mariani Avenue	?	xx.x	x.xxx	xx.x	D+	36.4	0.746	40.1	D+	36.3	0.749	+ 0.003	40.1	+ 0.0	?	xx.x	x.xxx	xx.x
#2 De Anza Boulevard and Lazaneo Drive	?	xx.x	x.xxx	xx.x	B	17.5	0.505	15.6	B	17.6	0.505	+ 0.000	15.6	- 0.0	?	xx.x	x.xxx	xx.x
#3 Bandlely Drive and Alves Drive	?	xx.x	x.xxx	xx.x	B	10.6	0.416	10.6	B	11.2	0.466	+ 0.050	11.2	+ 0.6	?	xx.x	x.xxx	xx.x
#4 De Anza Boulevard and Alves Drive	?	xx.x	x.xxx	xx.x	B	11.0	0.130	0.3	B	17.7	0.141	+ 0.011	0.3	+ 0.0	?	xx.x	x.xxx	xx.x
#5 Mary Avenue and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	C-	34.0	0.492	37.3	C-	33.9	0.494	+ 0.002	37.2	- 0.1	?	xx.x	x.xxx	xx.x
#6 N. Stelling Road and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	D	43.1	0.696	45.5	D	43.1	0.702	+ 0.006	45.3	- 0.1	?	xx.x	x.xxx	xx.x
#7 Saich Way and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	B	15.7	0.428	20.0	B	15.5	0.435	+ 0.007	19.7	- 0.3	?	xx.x	x.xxx	xx.x
#8 Bandlely Drive and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	B	15.0	0.383	12.2	B	16.1	0.394	+ 0.011	13.1	+ 0.9	?	xx.x	x.xxx	xx.x
#9 De Anza Boulevard and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	D+	37.6	0.779	37.8	D+	37.7	0.781	+ 0.001	37.9	+ 0.1	?	xx.x	x.xxx	xx.x


Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM

Summary Scenario Comparison Report (With Average Critical Delay)  
Future Volume Alternative

Intersection	???				Existing PM				Existing PP PM						???			
	LOS	Avg Del (sec)	Crit V/C	Avg Crit Del (sec)	LOS	Avg Del (sec)	Crit V/C	Avg Crit Del (sec)	LOS	Avg Del (sec)	Crit V/C	Crit V/C Change	Avg Crit Del (sec)	Avg Crit Del Change	LOS	Avg Del (sec)	Crit V/C	Avg Crit Del (sec)
#1 De Anza Boulevard and Mariani Avenue	?	xx.x	x.xxx	xx.x	D	42.2	0.756	43.0	D	42.3	0.754	- 0.001	43.0	+ 0.0	?	xx.x	x.xxx	xx.x
#2 De Anza Boulevard and Lazaneo Drive	?	xx.x	x.xxx	xx.x	B-	19.8	0.539	17.3	B-	19.7	0.538	- 0.001	17.4	+ 0.0	?	xx.x	x.xxx	xx.x
#3 Bandley Drive and Alves Drive	?	xx.x	x.xxx	xx.x	B	11.3	0.419	11.3	B	10.9	0.386	- 0.033	10.9	- 0.4	?	xx.x	x.xxx	xx.x
#4 De Anza Boulevard and Alves Drive	?	xx.x	x.xxx	xx.x	C	20.3	0.359	0.6	B	17.6	0.340	- 0.018	0.6	- 0.0	?	xx.x	x.xxx	xx.x
#5 Mary Avenue and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	C-	33.3	0.523	28.1	C-	33.4	0.521	- 0.002	28.2	+ 0.1	?	xx.x	x.xxx	xx.x
#6 N. Stelling Road and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	D	39.2	0.808	37.9	D	39.1	0.803	- 0.005	37.7	- 0.2	?	xx.x	x.xxx	xx.x
#7 Saich Way and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	C+	21.7	0.491	32.3	C+	21.8	0.486	- 0.005	32.5	+ 0.2	?	xx.x	x.xxx	xx.x
#8 Bandley Drive and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	C	24.5	0.472	22.1	C	23.6	0.467	- 0.004	21.6	- 0.4	?	xx.x	x.xxx	xx.x
#9 De Anza Boulevard and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	D-	53.8	1.008	67.3	D-	53.3	1.005	- 0.003	66.5	- 0.8	?	xx.x	x.xxx	xx.x

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing AM

Intersection #1: De Anza Blvd/Mariani Ave

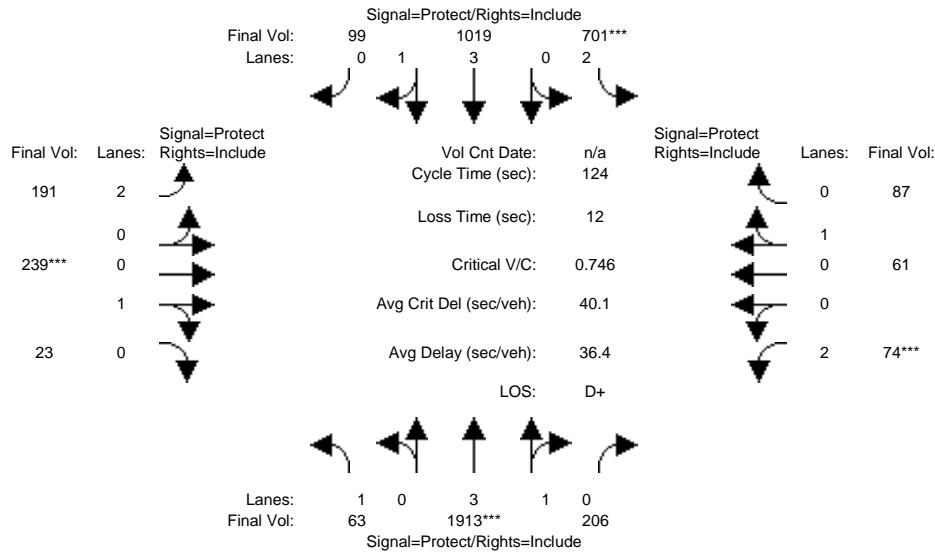

Street Name:	De Anza Blvd						Mariani Ave					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:	North Bound			South Bound			East Bound			West Bound		
Base Vol:	61	1867	201	684	995	97	186	233	22	72	60	85
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	61	1867	201	684	995	97	186	233	22	72	60	85
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	61	1867	201	684	995	97	186	233	22	72	60	85
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
PHF Volume:	62	1913	206	701	1019	99	191	239	23	74	61	87
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	62	1913	206	701	1019	99	191	239	23	74	61	87
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	63	1913	206	701	1019	99	191	239	23	74	61	87


Saturation Flow Module:	North Bound			South Bound			East Bound			West Bound		
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.83	0.99	0.95	0.83	0.95	0.95	0.83	0.95	0.95
Lanes:	1.00	3.60	0.40	2.00	3.63	0.37	2.00	0.91	0.09	2.00	0.41	0.59
Final Sat.:	1750	6770	729	3150	6833	666	3150	1645	155	3150	745	1055

Capacity Analysis Module:	North Bound			South Bound			East Bound			West Bound		
Vol/Sat:	0.04	0.28	0.28	0.22	0.15	0.15	0.06	0.15	0.15	0.02	0.08	0.08
Crit Moves:	****			****			****			****		
Green Time:	22.4	45.6	45.6	35.9	59.2	59.2	12.9	23.4	23.4	7.0	17.6	17.6
Volume/Cap:	0.20	0.77	0.77	0.77	0.31	0.31	0.58	0.77	0.77	0.41	0.58	0.58
Delay/Veh:	43.5	35.9	35.9	44.2	20.0	20.0	55.7	57.8	57.8	58.1	53.2	53.2
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	43.5	35.9	35.9	44.2	20.0	20.0	55.7	57.8	57.8	58.1	53.2	53.2
LOS by Move:	D	D+	D+	D	B-	B-	E+	E+	E+	E+	D-	D-
HCM2kAvgQ:	2	18	18	16	6	6	5	12	12	2	6	6

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP AM

Intersection #1: De Anza Blvd/Mariani Ave

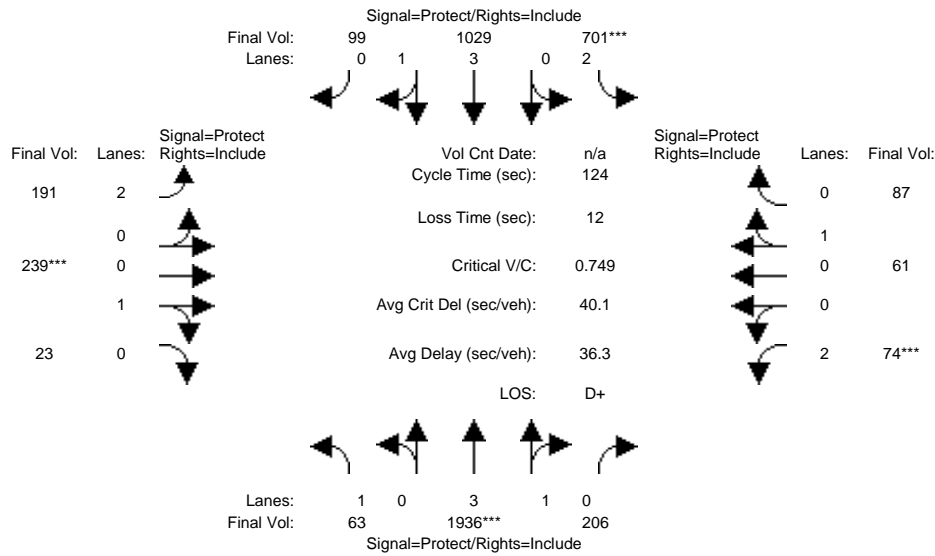

Street Name:	De Anza Blvd						Mariani Ave					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	61	1867	201	684	995	97	186	233	22	72	60	85
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	61	1867	201	684	995	97	186	233	22	72	60	85
Added Vol:	0	23	0	0	9	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	61	1890	201	684	1004	97	186	233	22	72	60	85
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
PHF Volume:	62	1936	206	701	1029	99	191	239	23	74	61	87
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	62	1936	206	701	1029	99	191	239	23	74	61	87
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	63	1936	206	701	1029	99	191	239	23	74	61	87


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.83	0.99	0.95	0.83	0.95	0.95	0.83	0.95	0.95
Lanes:	1.00	3.60	0.40	2.00	3.63	0.37	2.00	0.91	0.09	2.00	0.41	0.59
Final Sat.:	1750	6778	721	3150	6838	661	3150	1645	155	3150	745	1055

Capacity Analysis Module:												
Vol/Sat:	0.04	0.29	0.29	0.22	0.15	0.15	0.06	0.15	0.15	0.02	0.08	0.08
Crit Moves:	****			****			****			****		
Green Time:	22.3	45.9	45.9	35.8	59.4	59.4	12.8	23.3	23.3	7.0	17.5	17.5
Volume/Cap:	0.20	0.77	0.77	0.77	0.31	0.31	0.58	0.77	0.77	0.41	0.58	0.58
Delay/Veh:	43.6	35.8	35.8	44.5	19.9	19.9	55.8	58.2	58.2	58.1	53.3	53.3
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	43.6	35.8	35.8	44.5	19.9	19.9	55.8	58.2	58.2	58.1	53.3	53.3
LOS by Move:	D	D+	D+	D	B-	B-	E+	E+	E+	E+	D-	D-
HCM2kAvgQ:	2	18	18	16	6	6	5	12	12	2	6	6

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing AM

Intersection #2: De Anza Blvd/Lazaneo Dr

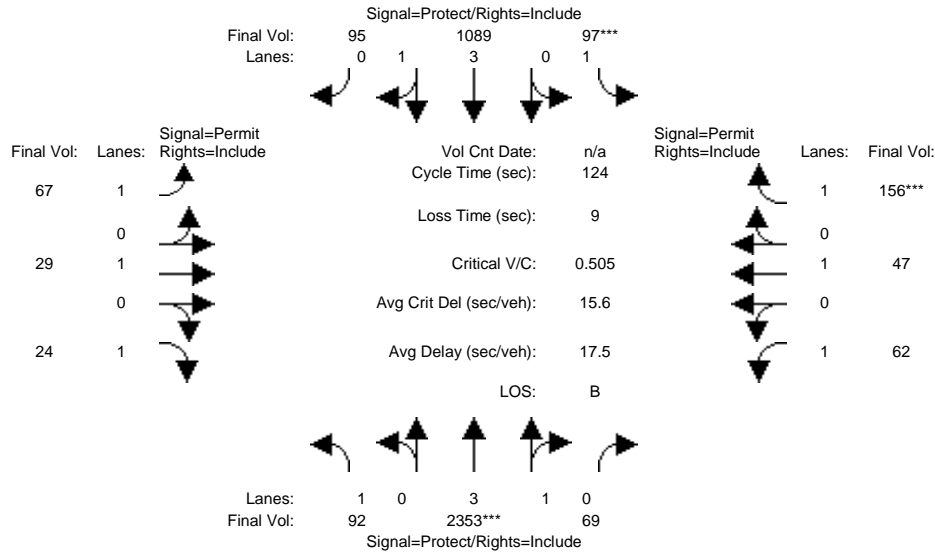

Street Name:	De Anza Blvd						Lazaneo Dr					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	10	10	10	10	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	86	2198	64	91	1017	89	63	27	22	58	44	146
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	86	2198	64	91	1017	89	63	27	22	58	44	146
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	86	2198	64	91	1017	89	63	27	22	58	44	146
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
PHF Volume:	92	2353	69	97	1089	95	67	29	24	62	47	156
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	92	2353	69	97	1089	95	67	29	24	62	47	156
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	92	2353	69	97	1089	95	67	29	24	62	47	156


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.92	0.99	0.95	0.92	1.00	0.92	0.92	1.00	0.92
Lanes:	1.00	3.88	0.12	1.00	3.66	0.34	1.00	1.00	1.00	1.00	1.00	1.00
Final Sat.:	1750	7287	212	1750	6895	603	1750	1900	1750	1750	1900	1750

Capacity Analysis Module:												
Vol/Sat:	0.05	0.32	0.32	0.06	0.16	0.16	0.04	0.02	0.01	0.04	0.02	0.09
Crit Moves:	****			****								
Green Time:	24.5	79.4	79.4	13.7	68.5	68.5	22.0	22.0	22.0	22.0	22.0	22.0
Volume/Cap:	0.27	0.50	0.50	0.50	0.29	0.29	0.22	0.09	0.08	0.20	0.14	0.50
Delay/Veh:	42.5	12.0	12.0	54.1	14.8	14.8	44.0	42.7	42.7	43.9	43.2	47.4
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	42.5	12.0	12.0	54.1	14.8	14.8	44.0	42.7	42.7	43.9	43.2	47.4
LOS by Move:	D	B+	B+	D-	B	B	D	D	D	D	D	D
HCM2kAvgQ:	3	12	12	4	6	6	2	1	1	2	2	6

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP AM

Intersection #2: De Anza Blvd/Lazaneo Dr

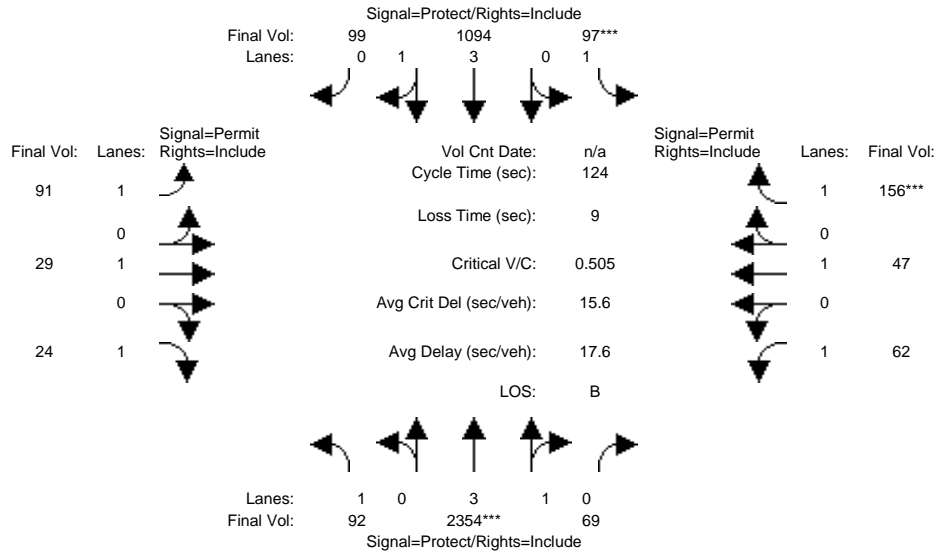

Street Name:	De Anza Blvd						Lazaneo Dr					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R

Min. Green:	7	10	10	7	10	10	10	10	10	10	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:

Base Vol:	86	2198	64	91	1017	89	63	27	22	58	44	146
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	86	2198	64	91	1017	89	63	27	22	58	44	146
Added Vol:	0	1	0	0	5	3	22	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	86	2199	64	91	1022	92	85	27	22	58	44	146
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
PHF Volume:	92	2354	69	97	1094	99	91	29	24	62	47	156
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	92	2354	69	97	1094	99	91	29	24	62	47	156
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	92	2354	69	97	1094	99	91	29	24	62	47	156

Saturation Flow Module:

Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.92	0.99	0.95	0.92	1.00	0.92	0.92	1.00	0.92
Lanes:	1.00	3.88	0.12	1.00	3.66	0.34	1.00	1.00	1.00	1.00	1.00	1.00
Final Sat.:	1750	7288	212	1750	6880	619	1750	1900	1750	1750	1900	1750


Capacity Analysis Module:

Vol/Sat:	0.05	0.32	0.32	0.06	0.16	0.16	0.05	0.02	0.01	0.04	0.02	0.09
Crit Moves:	****			****						****		
Green Time:	24.4	79.4	79.4	13.7	68.7	68.7	21.9	21.9	21.9	21.9	21.9	21.9
Volume/Cap:	0.27	0.50	0.50	0.50	0.29	0.29	0.29	0.09	0.08	0.20	0.14	0.50
Delay/Veh:	42.7	11.9	11.9	54.1	14.7	14.7	44.8	42.8	42.7	43.9	43.3	47.5
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	42.7	11.9	11.9	54.1	14.7	14.7	44.8	42.8	42.7	43.9	43.3	47.5
LOS by Move:	D	B+	B+	D-	B	B	D	D	D	D	D	D
HCM2kAvgQ:	3	12	12	4	6	6	3	1	1	2	2	6

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM  
Level Of Service Computation Report  
2000 HCM 4-Way Stop (Future Volume Alternative)  
Existing AM

Intersection #3: Bandlely Dr/Alves Dr

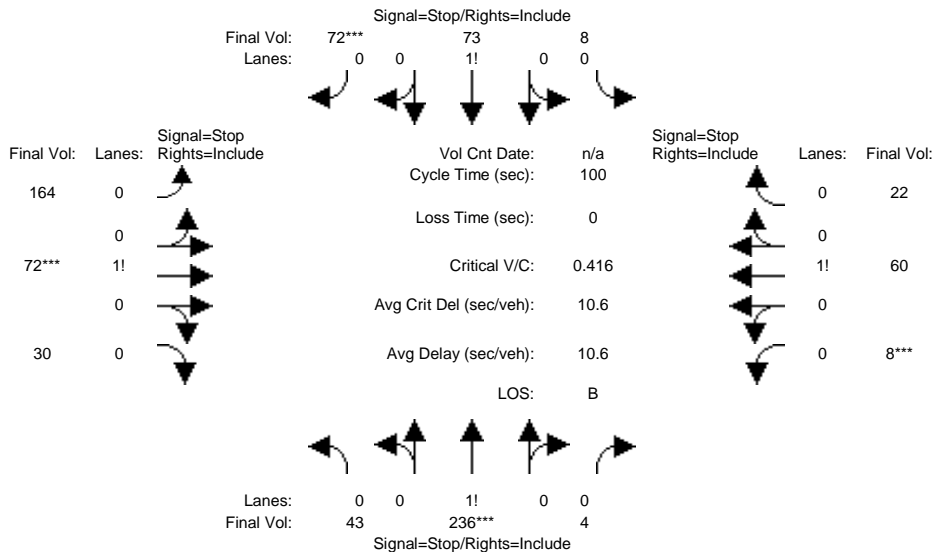

Street Name:	Bandlely Dr						Alves Dr					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R

Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
-------------	---	----	----	---	----	----	---	----	----	---	----	----

Volume Module:												
Base Vol:	38	210	4	7	65	64	146	64	27	7	53	20
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	38	210	4	7	65	64	146	64	27	7	53	20
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	38	210	4	7	65	64	146	64	27	7	53	20
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89
PHF Volume:	43	236	4	8	73	72	164	72	30	8	60	22
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	43	236	4	8	73	72	164	72	30	8	60	22
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	43	236	4	8	73	72	164	72	30	8	60	22

Saturation Flow Module:												
Adjustment:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lanes:	0.15	0.83	0.02	0.05	0.48	0.47	0.62	0.27	0.11	0.09	0.66	0.25
Final Sat.:	103	568	11	35	324	319	408	179	75	55	415	156

Capacity Analysis Module:												
Vol/Sat:	0.42	0.42	0.42	0.23	0.23	0.23	0.40	0.40	0.40	0.14	0.14	0.14
Crit Moves:	****			****			****			****		
Delay/Veh:	11.3	11.3	11.3	9.2	9.2	9.2	11.3	11.3	11.3	9.0	9.0	9.0
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	11.3	11.3	11.3	9.2	9.2	9.2	11.3	11.3	11.3	9.0	9.0	9.0
LOS by Move:	B	B	B	A	A	A	B	B	B	A	A	A
ApproachDel:	11.3			9.2			11.3			9.0		
Delay Adj:	1.00			1.00			1.00			1.00		
ApprAdjDel:	11.3			9.2			11.3			9.0		
LOS by Appr:	B			A			B			A		
AllWayAvgQ:	0.6	0.6	0.6	0.2	0.2	0.2	0.6	0.6	0.6	0.1	0.1	0.1

Note: Queue reported is the number of cars per lane.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
Intersection #3 Bandlely Dr/Alves Dr  
\*\*\*\*\*



Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Stop Sign			Stop Sign			Stop Sign			Stop Sign		
Lanes:	0	0	1	0	0	1	0	0	0	0	1	0
Initial Vol:	38	210	4	7	65	64	146	64	27	7	53	20
Major Street Volume:	388											
Minor Approach Volume:	237											
Minor Approach Volume Threshold:	472											

SIGNAL WARRANT DISCLAIMER


This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM

Level Of Service Computation Report  
2000 HCM 4-Way Stop (Future Volume Alternative)  
Existing PP AM

Intersection #3: Bandlely Dr/Alves Dr

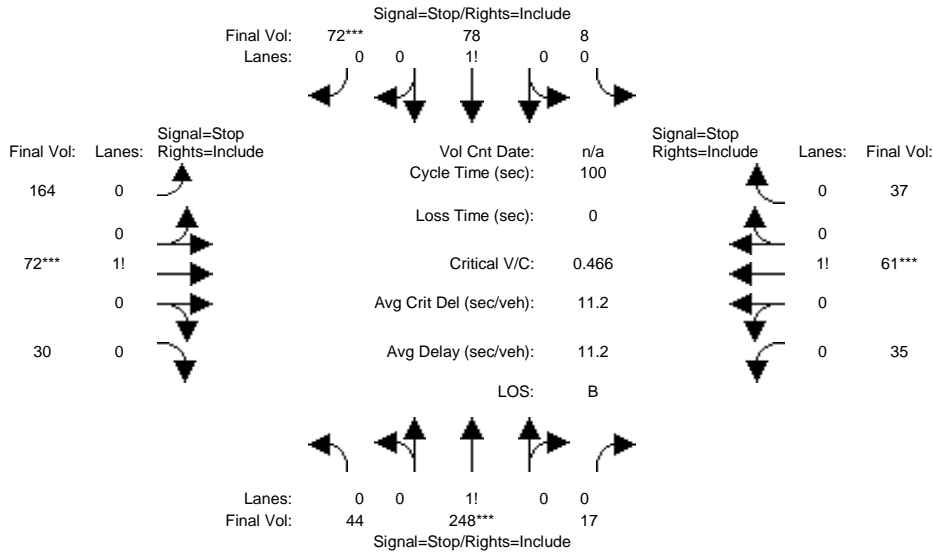

Street Name:	Bandlely Dr						Alves Dr					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R

Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
-------------	---	----	----	---	----	----	---	----	----	---	----	----

Volume Module:												
Base Vol:	38	210	4	7	65	64	146	64	27	7	53	20
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	38	210	4	7	65	64	146	64	27	7	53	20
Added Vol:	1	11	11	0	4	0	0	0	0	24	1	13
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	39	221	15	7	69	64	146	64	27	31	54	33
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89
PHF Volume:	44	248	17	8	78	72	164	72	30	35	61	37
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	44	248	17	8	78	72	164	72	30	35	61	37
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	44	248	17	8	78	72	164	72	30	35	61	37

Saturation Flow Module:												
Adjustment:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lanes:	0.14	0.81	0.05	0.05	0.49	0.46	0.62	0.27	0.11	0.26	0.46	0.28
Final Sat.:	94	533	36	32	318	295	392	172	73	160	279	171

Capacity Analysis Module:												
Vol/Sat:	0.47	0.47	0.47	0.24	0.24	0.24	0.42	0.42	0.42	0.22	0.22	0.22
Crit Moves:	****			****			****			****		
Delay/Veh:	12.2	12.2	12.2	9.6	9.6	9.6	11.7	11.7	11.7	9.7	9.7	9.7
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	12.2	12.2	12.2	9.6	9.6	9.6	11.7	11.7	11.7	9.7	9.7	9.7
LOS by Move:	B	B	B	A	A	A	B	B	B	A	A	A
ApproachDel:	12.2			9.6			11.7			9.7		
Delay Adj:	1.00			1.00			1.00			1.00		
ApprAdjDel:	12.2			9.6			11.7			9.7		
LOS by Appr:	B			A			B			A		
AllWayAvgQ:	0.7	0.7	0.7	0.3	0.3	0.3	0.6	0.6	0.6	0.2	0.2	0.2

Note: Queue reported is the number of cars per lane.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
Intersection #3 Bandlely Dr/Alves Dr  
\*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Stop Sign			Stop Sign			Stop Sign			Stop Sign		
Lanes:	0	0	1	0	0	1	0	0	0	0	1	0
Initial Vol:	39	221	15	7	69	64	146	64	27	31	54	33
Major Street Volume:							415					
Minor Approach Volume:							237					
Minor Approach Volume Threshold:							454					


SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIA  
 DC16-0009  
 Existing and Existing PP AM  
 Level Of Service Computation Report  
 2000 HCM Unsignalized (Future Volume Alternative)  
 Existing AM

Intersection #4: De Anza Blvd/Alves Dr

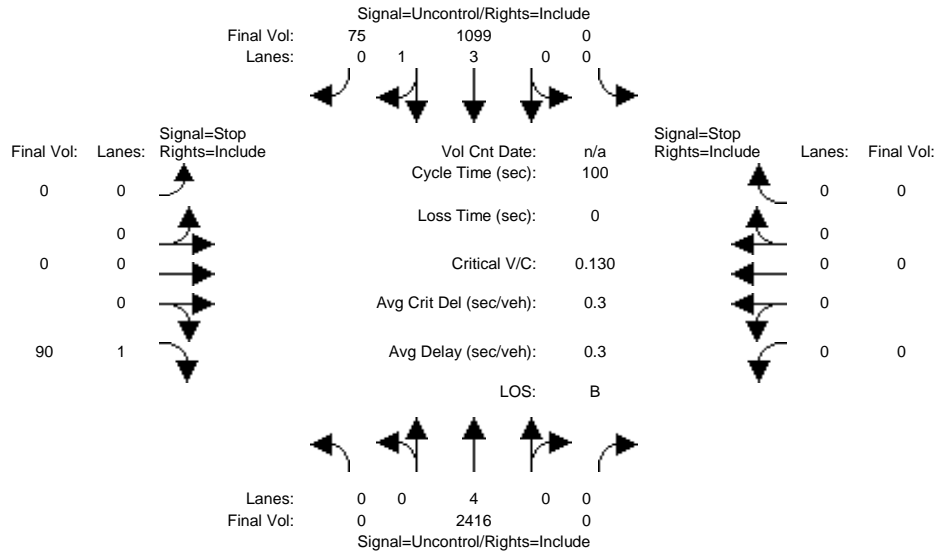

Street Name: De Anza Blvd Alves Dr  
 Approach: North Bound South Bound East Bound West Bound  
 Movement: L - T - R L - T - R L - T - R L - T - R

Volume Module:												
Base Vol:	0	2315	0	0	1053	72	0	0	86	0	0	0
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	2315	0	0	1053	72	0	0	86	0	0	0
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	0	2315	0	0	1053	72	0	0	86	0	0	0
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	0	2416	0	0	1099	75	0	0	90	0	0	0
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
FinalVolume:	0	2416	0	0	1099	75	0	0	90	0	0	0

Critical Gap Module:												
Critical Gp:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	6.9	xxxxx	xxxx	xxxxx
FollowUpTim:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	3.3	xxxxx	xxxx	xxxxx

Capacity Module:												
Cnflct Vol:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	312	xxxx	xxxx	xxxxx
Potent Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	689	xxxx	xxxx	xxxxx
Move Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	689	xxxx	xxxx	xxxxx
Volume/Cap:	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	0.13	xxxx	xxxx	xxxx

Level Of Service Module:												
2Way95thQ:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	0.4	xxxx	xxxx	xxxxx
Control Del:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	11.0	xxxxx	xxxx	xxxxx
LOS by Move:	*	*	*	*	*	*	*	*	B	*	*	*
Movement:	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT		LT - LTR - RT	LT - LTR - RT	
Shared Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx
SharedQueue:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shrd ConDel:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shared LOS:	*	*	*	*	*	*	*	*	*	*	*	*
ApproachDel:	xxxxxxx			xxxxxxx					11.0	xxxxxxx		
ApproachLOS:	*			*					B	*		*

Note: Queue reported is the number of cars per lane.

Peak Hour Delay Signal Warrant Report

\*\*\*\*\*  
 Intersection #4 De Anza Blvd/Alves Dr  
 \*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 2315 0	0 1053 72	0 0 86	0 0 0
ApproachDel:	xxxxxx	xxxxxx	11.0	xxxxxx

Approach[eastbound][lanes=1][control=Stop Sign]  
Signal Warrant Rule #1: [vehicle-hours=0.3]  
FAIL - Vehicle-hours less than 4 for one lane approach.  
Signal Warrant Rule #2: [approach volume=86]  
FAIL - Approach volume less than 100 for one lane approach.  
Signal Warrant Rule #3: [approach count=3][total volume=3526]  
SUCCEED - Total volume greater than or equal to 650 for intersection with less than four approaches.

SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
Intersection #4 De Anza Blvd/Alves Dr  
\*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 2315 0	0 1053 72	0 0 86	0 0 0

Major Street Volume: 3440  
Minor Approach Volume: 86  
Minor Approach Volume Threshold: -141 [less than minimum of 100]

SIGNAL WARRANT DISCLAIMER


This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM

Level Of Service Computation Report  
2000 HCM Unsignalized (Future Volume Alternative)  
Existing PP AM

Intersection #4: De Anza Blvd/Alves Dr

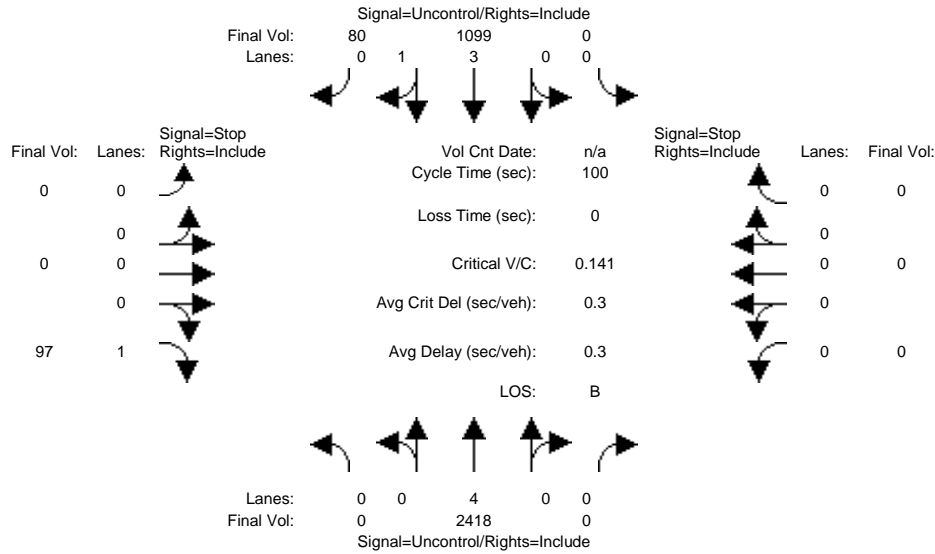

Street Name: De Anza Blvd Alves Dr  
 Approach: North Bound South Bound East Bound West Bound  
 Movement: L - T - R L - T - R L - T - R L - T - R

Volume Module:

Base Vol:	0	2315	0	0	1053	72	0	0	86	0	0	0
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	2315	0	0	1053	72	0	0	86	0	0	0
Added Vol:	0	1	0	0	0	5	0	0	7	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	0	2316	0	0	1053	77	0	0	93	0	0	0
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	0	2418	0	0	1099	80	0	0	97	0	0	0
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
FinalVolume:	0	2418	0	0	1099	80	0	0	97	0	0	0

Critical Gap Module:

Critical Gp:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	6.9	xxxxx	xxxx	xxxxx
FollowUpTim:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	3.3	xxxxx	xxxx	xxxxx

Capacity Module:

Cnflct Vol:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	315	xxxx	xxxx	xxxxx
Potent Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	687	xxxx	xxxx	xxxxx
Move Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	687	xxxx	xxxx	xxxxx
Volume/Cap:	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	0.14	xxxx	xxxx	xxxx

Level Of Service Module:

2Way95thQ:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	0.5	xxxx	xxxx	xxxxx
Control Del:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	11.1	xxxxx	xxxx	xxxxx
LOS by Move:	*	*	*	*	*	*	*	*	B	*	*	*
Movement:	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT		LT - LTR - RT	LT - LTR - RT	
Shared Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx
SharedQueue:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shrd ConDel:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shared LOS:	*	*	*	*	*	*	*	*	*	*	*	*
ApproachDel:	xxxxxxx		xxxxxxx						11.1	xxxxxxx		
ApproachLOS:	*		*						B	*		

Note: Queue reported is the number of cars per lane.

Peak Hour Delay Signal Warrant Report

\*\*\*\*\*  
Intersection #4 De Anza Blvd/Alves Dr  
\*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 2316 0	0 1053 77	0 0 93	0 0 0
ApproachDel:	xxxxxx	xxxxxx	11.1	xxxxxx

Approach[eastbound][lanes=1][control=Stop Sign]  
 Signal Warrant Rule #1: [vehicle-hours=0.3]  
 FAIL - Vehicle-hours less than 4 for one lane approach.  
 Signal Warrant Rule #2: [approach volume=93]  
 FAIL - Approach volume less than 100 for one lane approach.  
 Signal Warrant Rule #3: [approach count=3][total volume=3539]  
 SUCCEED - Total volume greater than or equal to 650 for intersection with less than four approaches.

SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
 Intersection #4 De Anza Blvd/Alves Dr  
 \*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 2316 0	0 1053 77	0 0 93	0 0 0

Major Street Volume: 3446  
 Minor Approach Volume: 93  
 Minor Approach Volume Threshold: -141 [less than minimum of 100]


SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing AM

Intersection #5: Mary Ave/Stevens Creek Blvd

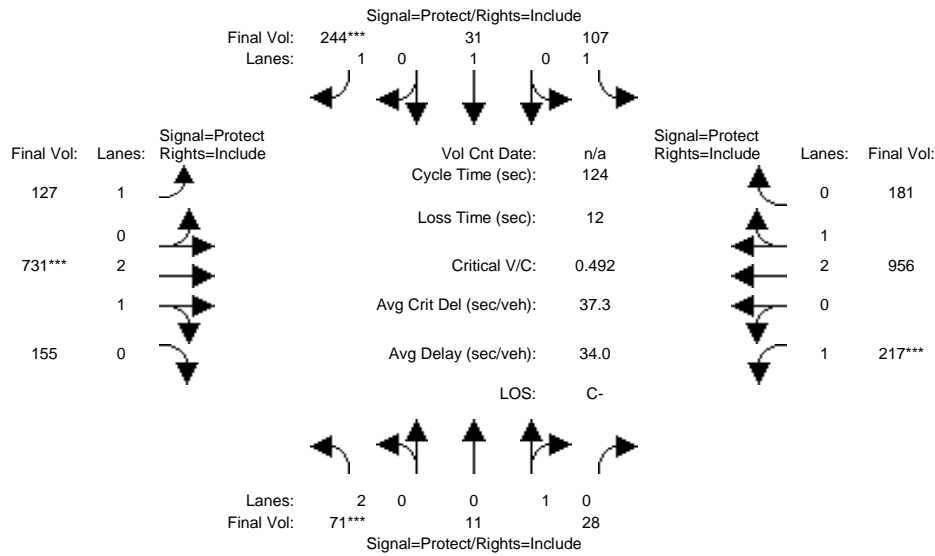

Street Name:	Mary Ave						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	64	10	25	97	28	221	115	662	140	196	865	164
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	64	10	25	97	28	221	115	662	140	196	865	164
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	64	10	25	97	28	221	115	662	140	196	865	164
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91
PHF Volume:	71	11	28	107	31	244	127	731	155	217	956	181
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	71	11	28	107	31	244	127	731	155	217	956	181
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	71	11	28	107	31	244	127	731	155	217	956	181

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	0.95	0.95	0.92	1.00	0.92	0.92	0.99	0.95	0.92	0.99	0.95
Lanes:	2.00	0.29	0.71	1.00	1.00	1.00	1.00	2.46	0.54	1.00	2.50	0.50
Final Sat.:	3150	514	1286	1750	1900	1750	1750	4621	977	1750	4706	892


Capacity Analysis Module:												
Vol/Sat:	0.02	0.02	0.02	0.06	0.02	0.14	0.07	0.16	0.16	0.12	0.20	0.20
Crit Moves:	***					***		***		***		
Green Time:	7.0	23.7	23.7	18.0	34.8	34.8	18.5	39.4	39.4	30.8	51.7	51.7
Volume/Cap:	0.40	0.11	0.11	0.42	0.06	0.50	0.49	0.50	0.50	0.50	0.49	0.49
Delay/Veh:	57.9	41.6	41.6	49.4	32.7	38.1	49.8	34.5	34.5	40.9	26.6	26.6
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	57.9	41.6	41.6	49.4	32.7	38.1	49.8	34.5	34.5	40.9	26.6	26.6
LOS by Move:	E+	D	D	D	C-	D+	D	C-	C-	D	C	C
HCM2kAvgQ:	2	1	1	4	1	9	5	9	9	7	10	10

Note: Queue reported is the number of cars per lane.



Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP AM

Intersection #5: Mary Ave/Stevens Creek Blvd

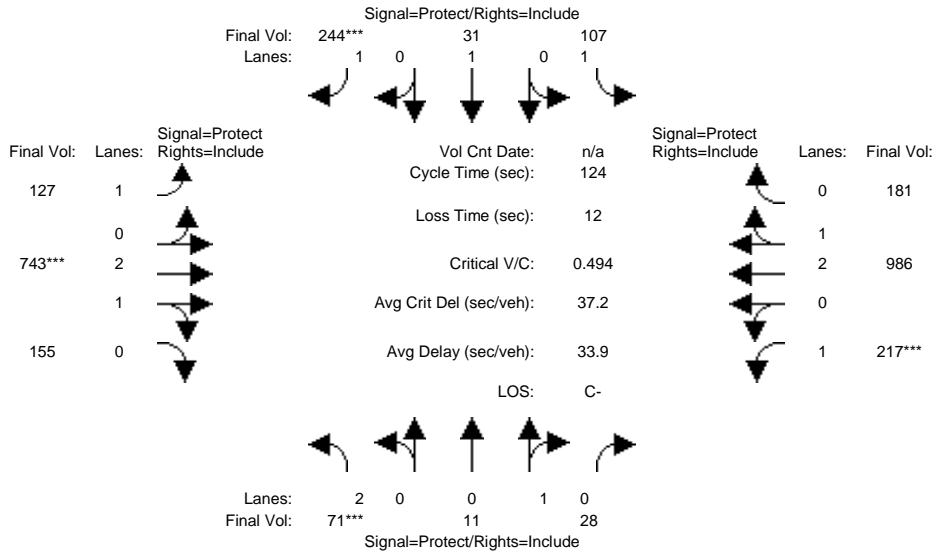

Street Name:	Mary Ave						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	64	10	25	97	28	221	115	662	140	196	865	164
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	64	10	25	97	28	221	115	662	140	196	865	164
Added Vol:	0	0	0	0	0	0	0	10	0	0	27	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	64	10	25	97	28	221	115	672	140	196	892	164
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91
PHF Volume:	71	11	28	107	31	244	127	743	155	217	986	181
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	71	11	28	107	31	244	127	743	155	217	986	181
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	71	11	28	107	31	244	127	743	155	217	986	181

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	0.95	0.95	0.92	1.00	0.92	0.92	0.99	0.95	0.92	0.99	0.95
Lanes:	2.00	0.29	0.71	1.00	1.00	1.00	1.00	2.46	0.54	1.00	2.52	0.48
Final Sat.:	3150	514	1286	1750	1900	1750	1750	4633	965	1750	4729	869


Capacity Analysis Module:												
Vol/Sat:	0.02	0.02	0.02	0.06	0.02	0.14	0.07	0.16	0.16	0.12	0.21	0.21
Crit Moves:	***					***		***		***		
Green Time:	7.0	23.6	23.6	18.0	34.6	34.6	18.2	39.7	39.7	30.7	52.2	52.2
Volume/Cap:	0.40	0.11	0.11	0.42	0.06	0.50	0.49	0.50	0.50	0.50	0.49	0.49
Delay/Veh:	57.9	41.7	41.7	49.4	32.8	38.3	50.2	34.3	34.3	41.0	26.4	26.4
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	57.9	41.7	41.7	49.4	32.8	38.3	50.2	34.3	34.3	41.0	26.4	26.4
LOS by Move:	E+	D	D	D	C-	D+	D	C-	C-	D	C	C
HCM2kAvgQ:	2	1	1	4	1	9	5	9	9	7	10	10

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing AM

Intersection #6: Stevens Creek Blvd/Stelling Rd 1613-217 [CMP 2010]

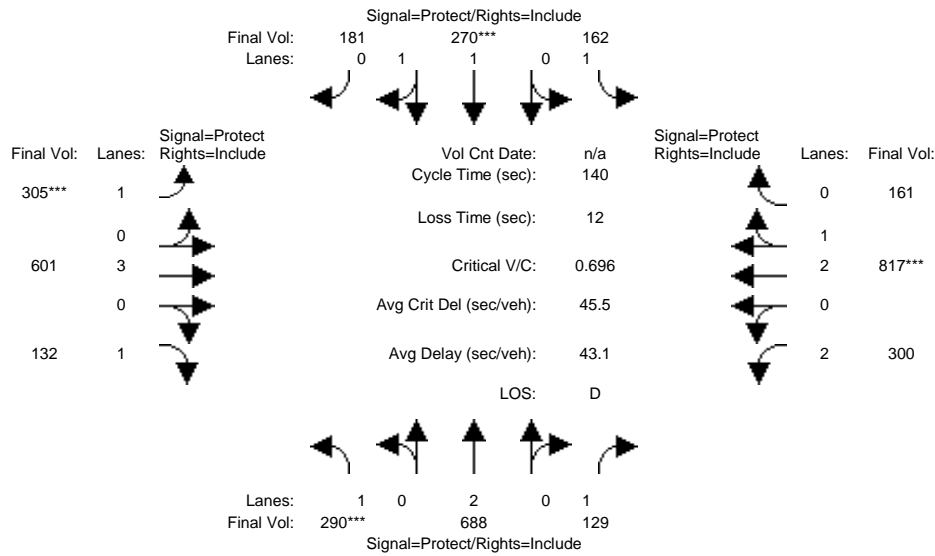

Street Name:	Stelling Road						Stevens Creek Boulevard					
	North Bound			South Bound			East Bound			West Bound		
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	267	634	119	149	249	167	281	554	122	277	753	148
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	267	634	119	149	249	167	281	554	122	277	753	148
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	267	634	119	149	249	167	281	554	122	277	753	148
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
PHF Volume:	290	688	129	162	270	181	305	601	132	300	817	161
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	290	688	129	162	270	181	305	601	132	300	817	161
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	290	688	129	162	270	181	305	601	132	300	817	161

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	1.00	0.92	0.92	0.99	0.95	0.92	1.00	0.92	0.83	0.99	0.95
Lanes:	1.00	2.00	1.00	1.00	1.18	0.82	1.00	3.00	1.00	2.00	2.49	0.51
Final Sat.:	1750	3800	1750	1750	2214	1485	1750	5700	1750	3150	4679	920


Capacity Analysis Module:												
Vol/Sat:	0.17	0.18	0.07	0.09	0.12	0.12	0.17	0.11	0.08	0.10	0.17	0.17
Crit Moves:	***				***		***				***	
Green Time:	33.3	38.3	38.3	19.5	24.5	24.5	35.0	36.8	36.8	33.3	35.1	35.1
Volume/Cap:	0.70	0.66	0.27	0.66	0.70	0.70	0.70	0.40	0.29	0.40	0.70	0.70
Delay/Veh:	53.8	46.7	40.2	63.7	57.5	57.5	41.9	32.6	31.7	35.9	38.5	38.5
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	53.8	46.7	40.2	63.7	57.5	57.5	41.9	32.6	31.7	35.9	38.5	38.5
LOS by Move:	D-	D	D	E	E+	E+	D	C-	C	D+	D+	D+
HCM2kAvgQ:	13	14	5	8	10	10	12	6	4	5	12	12

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP AM

Intersection #6: Stevens Creek Blvd/Stelling Rd 1613-217 [CMP 2010]

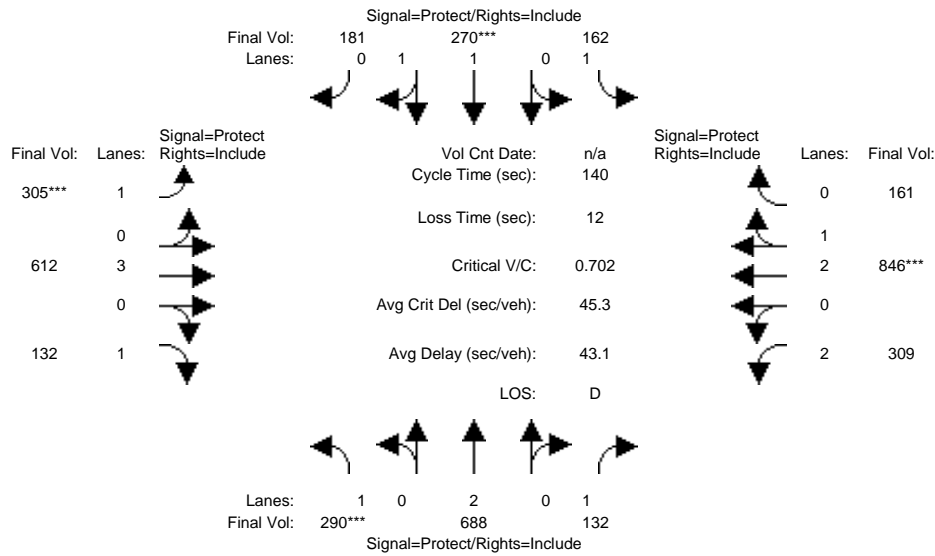

Street Name:	Stelling Road						Stevens Creek Boulevard					
	North Bound			South Bound			East Bound			West Bound		
	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:

Base Vol:	267	634	119	149	249	167	281	554	122	277	753	148
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	267	634	119	149	249	167	281	554	122	277	753	148
Added Vol:	0	0	3	0	0	0	0	10	0	8	27	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	267	634	122	149	249	167	281	564	122	285	780	148
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
PHF Volume:	290	688	132	162	270	181	305	612	132	309	846	161
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	290	688	132	162	270	181	305	612	132	309	846	161
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	290	688	132	162	270	181	305	612	132	309	846	161

Saturation Flow Module:

Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	1.00	0.92	0.92	0.99	0.95	0.92	1.00	0.92	0.83	0.99	0.95
Lanes:	1.00	2.00	1.00	1.00	1.18	0.82	1.00	3.00	1.00	2.00	2.50	0.50
Final Sat.:	1750	3800	1750	1750	2214	1485	1750	5700	1750	3150	4706	893

Capacity Analysis Module:


Vol/Sat:	0.17	0.18	0.08	0.09	0.12	0.12	0.17	0.11	0.08	0.10	0.18	0.18
Crit Moves:	***			****			****			****		
Green Time:	33.0	38.0	38.0	19.4	24.3	24.3	34.8	36.9	36.9	33.7	35.9	35.9
Volume/Cap:	0.70	0.67	0.28	0.67	0.70	0.70	0.70	0.41	0.29	0.41	0.70	0.70
Delay/Veh:	54.3	47.1	40.5	64.2	57.9	57.9	42.4	32.6	31.6	35.6	37.9	37.9
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	54.3	47.1	40.5	64.2	57.9	57.9	42.4	32.6	31.6	35.6	37.9	37.9
LOS by Move:	D-	D	D	E	E+	E+	D	C-	C	D+	D+	D+
HCM2kAvgQ:	13	14	5	8	11	11	12	6	4	6	12	12

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing AM

Intersection #7: Saich Way/Stevens Creek Blvd

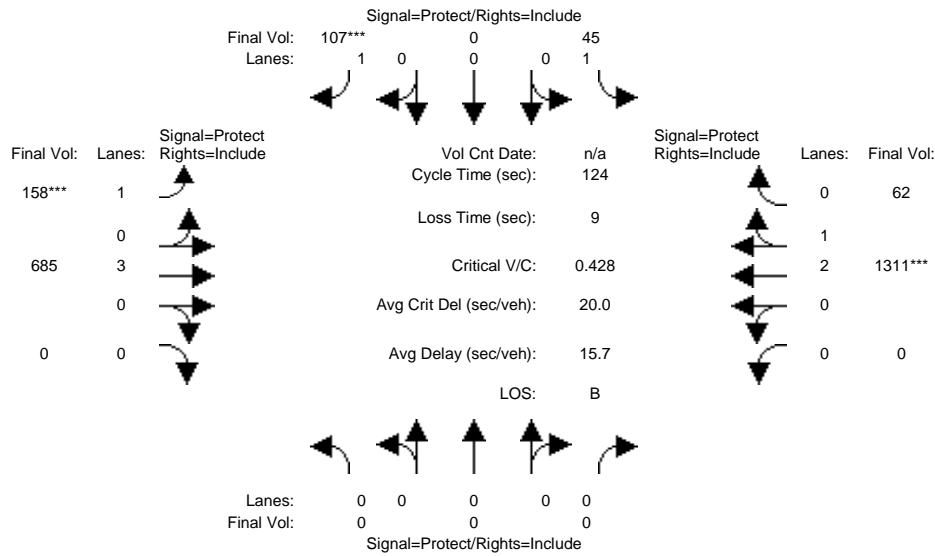

Street Name:	Saich Way						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	0	0	0	41	0	98	145	628	0	0	1202	57
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	0	0	41	0	98	145	628	0	0	1202	57
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	0	0	0	41	0	98	145	628	0	0	1202	57
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
PHF Volume:	0	0	0	45	0	107	158	685	0	0	1311	62
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	0	0	0	45	0	107	158	685	0	0	1311	62
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	0	0	0	45	0	107	158	685	0	0	1311	62

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	1.00	0.92	0.92	1.00	0.92	0.92	1.00	0.92	0.92	0.98	0.95
Lanes:	0.00	0.00	0.00	1.00	0.00	1.00	1.00	3.00	0.00	0.00	2.86	0.14
Final Sat.:	0	0	0	1750	0	1750	1750	5700	0	0	5346	254


Capacity Analysis Module:												
Vol/Sat:	0.00	0.00	0.00	0.03	0.00	0.06	0.09	0.12	0.00	0.00	0.25	0.25
Crit Moves:						****	****				****	
Green Time:	0.0	0.0	0.0	17.7	0.0	17.7	26.2	97.3	0.0	0.0	71.1	71.1
Volume/Cap:	0.00	0.00	0.00	0.18	0.00	0.43	0.43	0.15	0.00	0.00	0.43	0.43
Delay/Veh:	0.0	0.0	0.0	47.1	0.0	49.7	43.2	3.3	0.0	0.0	15.0	15.0
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	0.0	0.0	0.0	47.1	0.0	49.7	43.2	3.3	0.0	0.0	15.0	15.0
LOS by Move:	A	A	A	D	A	D	D	A	A	A	B	B
HCM2kAvgQ:	0	0	0	2	0	4	5	2	0	0	10	10

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP AM

Intersection #7: Saich Way/Stevens Creek Blvd

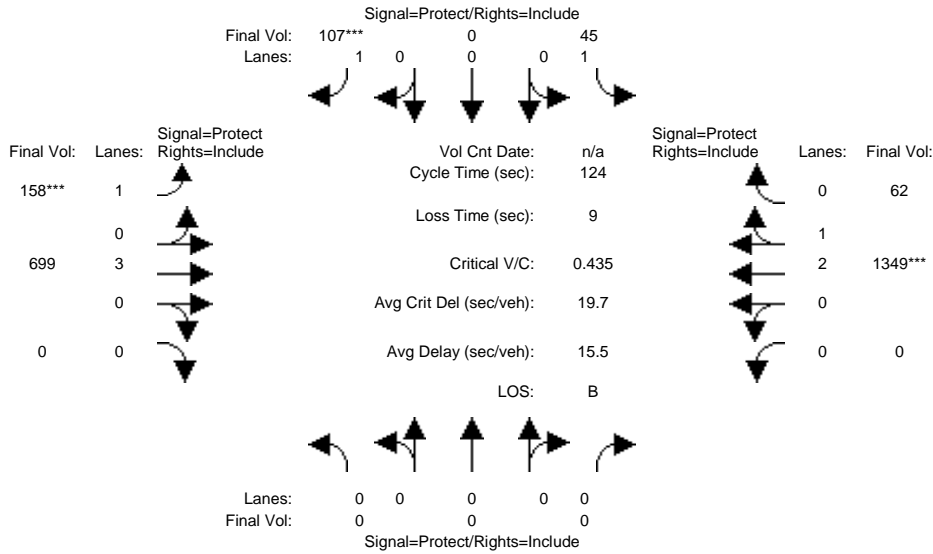

Street Name:	Saich Way						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	0	0	0	41	0	98	145	628	0	0	1202	57
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	0	0	41	0	98	145	628	0	0	1202	57
Added Vol:	0	0	0	0	0	0	0	13	0	0	35	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	0	0	0	41	0	98	145	641	0	0	1237	57
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
PHF Volume:	0	0	0	45	0	107	158	699	0	0	1349	62
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	0	0	0	45	0	107	158	699	0	0	1349	62
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	0	0	0	45	0	107	158	699	0	0	1349	62


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	1.00	0.92	0.92	1.00	0.92	0.92	1.00	0.92	0.92	0.98	0.95
Lanes:	0.00	0.00	0.00	1.00	0.00	1.00	1.00	3.00	0.00	0.00	2.86	0.14
Final Sat.:	0	0	0	1750	0	1750	1750	5700	0	0	5353	247

Capacity Analysis Module:												
Vol/Sat:	0.00	0.00	0.00	0.03	0.00	0.06	0.09	0.12	0.00	0.00	0.25	0.25
Crit Moves:						****	****				****	
Green Time:	0.0	0.0	0.0	17.4	0.0	17.4	25.8	97.6	0.0	0.0	71.8	71.8
Volume/Cap:	0.00	0.00	0.00	0.18	0.00	0.43	0.43	0.16	0.00	0.00	0.43	0.43
Delay/Veh:	0.0	0.0	0.0	47.4	0.0	50.0	43.6	3.2	0.0	0.0	14.8	14.8
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	0.0	0.0	0.0	47.4	0.0	50.0	43.6	3.2	0.0	0.0	14.8	14.8
LOS by Move:	A	A	A	D	A	D	D	A	A	A	B	B
HCM2kAvgQ:	0	0	0	2	0	4	5	2	0	0	10	10

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing AM

Intersection #8: Bandy Dr/Stevens Creek Blvd

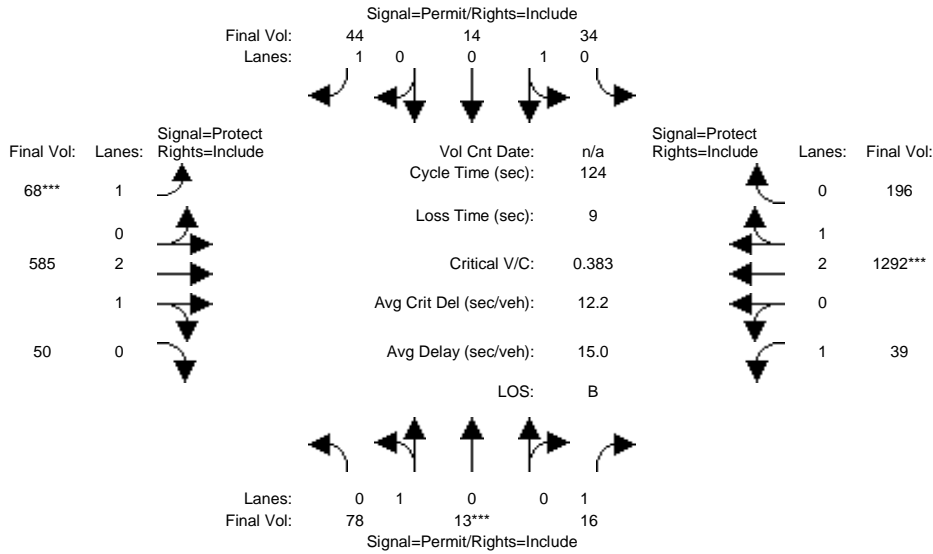

Street Name:	Bandy Dr						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:												
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	10	10	10	10	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	74	12	15	32	13	42	64	552	47	37	1220	185
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	74	12	15	32	13	42	64	552	47	37	1220	185
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	74	12	15	32	13	42	64	552	47	37	1220	185
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
PHF Volume:	78	13	16	34	14	44	68	585	50	39	1292	196
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	78	13	16	34	14	44	68	585	50	39	1292	196
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	78	13	16	34	14	44	68	585	50	39	1292	196


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.95	0.95	0.92	0.95	0.95	0.92	0.92	0.99	0.95	0.92	0.99	0.95
Lanes:	0.86	0.14	1.00	0.71	0.29	1.00	1.00	2.76	0.24	1.00	2.59	0.41
Final Sat.:	1549	251	1750	1280	520	1750	1750	5160	439	1750	4862	737

Capacity Analysis Module:												
Vol/Sat:	0.05	0.05	0.01	0.03	0.03	0.03	0.04	0.11	0.11	0.02	0.27	0.27
Crit Moves:	****						****			****		
Green Time:	16.4	16.4	16.4	16.4	16.4	16.4	12.5	65.8	65.8	32.8	86.1	86.1
Volume/Cap:	0.38	0.38	0.07	0.20	0.20	0.19	0.38	0.21	0.21	0.08	0.38	0.38
Delay/Veh:	50.2	50.2	47.2	48.4	48.4	48.3	53.5	15.4	15.4	34.4	8.0	8.0
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	50.2	50.2	47.2	48.4	48.4	48.3	53.5	15.4	15.4	34.4	8.0	8.0
LOS by Move:	D	D	D	D	D	D	D-	B	B	C-	A	A
HCM2kAvgQ:	4	4	1	2	2	2	3	4	4	1	8	8

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP AM

Intersection #8: Bandlely Dr/Stevens Creek Blvd

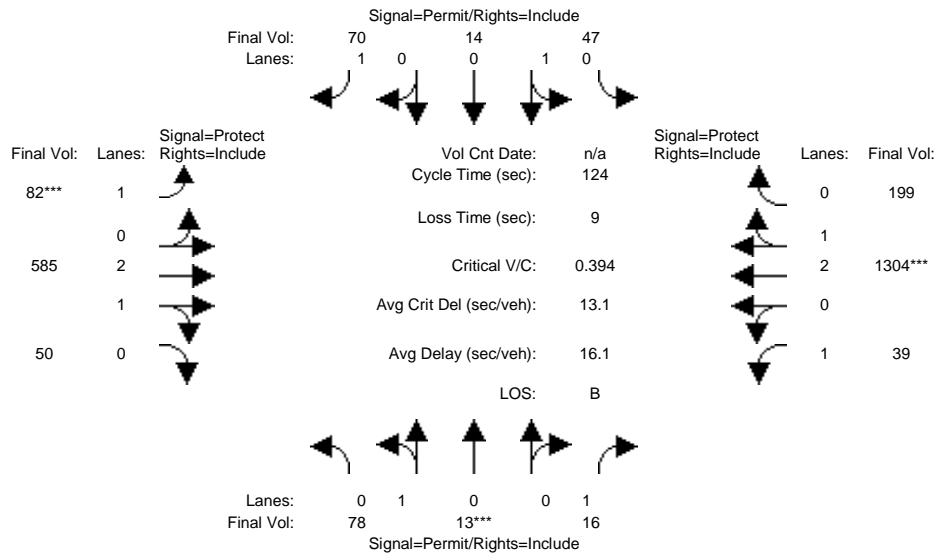

Street Name:	Bandlely Dr						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	10	10	10	10	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	74	12	15	32	13	42	64	552	47	37	1220	185
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	74	12	15	32	13	42	64	552	47	37	1220	185
Added Vol:	0	0	0	12	0	24	13	0	0	0	11	3
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	74	12	15	44	13	66	77	552	47	37	1231	188
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
PHF Volume:	78	13	16	47	14	70	82	585	50	39	1304	199
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	78	13	16	47	14	70	82	585	50	39	1304	199
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	78	13	16	47	14	70	82	585	50	39	1304	199

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.95	0.95	0.92	0.95	0.95	0.92	0.92	0.99	0.95	0.92	0.99	0.95
Lanes:	0.86	0.14	1.00	0.77	0.23	1.00	1.00	2.76	0.24	1.00	2.59	0.41
Final Sat.:	1549	251	1750	1389	411	1750	1750	5160	439	1750	4857	742


Capacity Analysis Module:												
Vol/Sat:	0.05	0.05	0.01	0.03	0.03	0.04	0.05	0.11	0.11	0.02	0.27	0.27
Crit Moves:	****						****			****		
Green Time:	15.9	15.9	15.9	15.9	15.9	15.9	14.7	66.1	66.1	32.9	84.4	84.4
Volume/Cap:	0.39	0.39	0.07	0.26	0.26	0.31	0.39	0.21	0.21	0.08	0.39	0.39
Delay/Veh:	50.7	50.7	47.7	49.3	49.3	49.9	51.8	15.3	15.3	34.3	8.7	8.7
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	50.7	50.7	47.7	49.3	49.3	49.9	51.8	15.3	15.3	34.3	8.7	8.7
LOS by Move:	D	D	D	D	D	D	D-	B	B	C-	A	A
HCM2kAvgQ:	4	4	1	2	2	3	3	4	4	1	8	8

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing AM

Intersection #9: De Anza Blvd/Stevens Creek Blvd 1638-211 [CMP 2010]

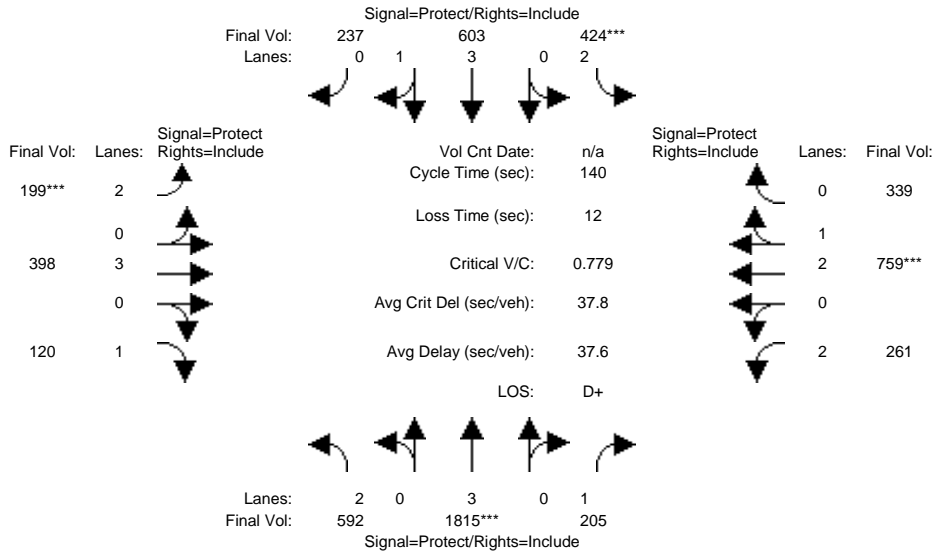

Street Name:	De Anza Boulevard						Stevens Creek Boulevard					
	North Bound			South Bound			East Bound			West Bound		
Approach:												
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0

Volume Module:

Base Vol:	564	1728	195	404	574	226	189	379	114	248	723	323
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	564	1728	195	404	574	226	189	379	114	248	723	323
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	564	1728	195	404	574	226	189	379	114	248	723	323
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
PHF Volume:	592	1815	205	424	603	237	199	398	120	261	759	339
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	592	1815	205	424	603	237	199	398	120	261	759	339
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	592	1815	205	424	603	237	199	398	120	261	759	339

Saturation Flow Module:

Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	1.00	0.92	0.83	1.00	0.92	0.83	1.00	0.92	0.83	1.00	0.95
Lanes:	2.00	3.00	1.00	2.00	3.00	1.00	2.00	3.00	1.00	2.00	2.04	0.96
Final Sat.:	3150	5700	1750	3150	5700	1750	3150	5700	1750	3150	3868	1728

Capacity Analysis Module:

Vol/Sat:	0.19	0.32	0.12	0.13	0.11	0.14	0.06	0.07	0.07	0.08	0.20	0.20
Crit Moves:	****			****			****			****		
Green Time:	47.3	57.2	57.2	24.2	34.1	34.1	11.3	21.6	21.6	25.0	35.3	35.3
Volume/Cap:	0.56	0.78	0.29	0.78	0.43	0.56	0.78	0.45	0.44	0.46	0.78	0.78
Delay/Veh:	25.6	21.1	15.2	54.7	35.3	36.8	77.3	54.2	54.9	52.1	51.6	51.6
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	25.6	21.1	15.2	54.7	35.3	36.8	77.3	54.2	54.9	52.1	51.6	51.6
LOS by Move:	C	C+	B	D-	D+	D+	E-	D-	D-	D-	D-	D-
HCM2kAvgQ:	10	19	4	12	6	9	7	5	5	6	16	16


Note: Queue reported is the number of cars per lane.



Marina Plaza TIA  
DC16-0009  
Existing and Existing PP AM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP AM

Intersection #9: De Anza Blvd/Stevens Creek Blvd 1638-211 [CMP 2010]

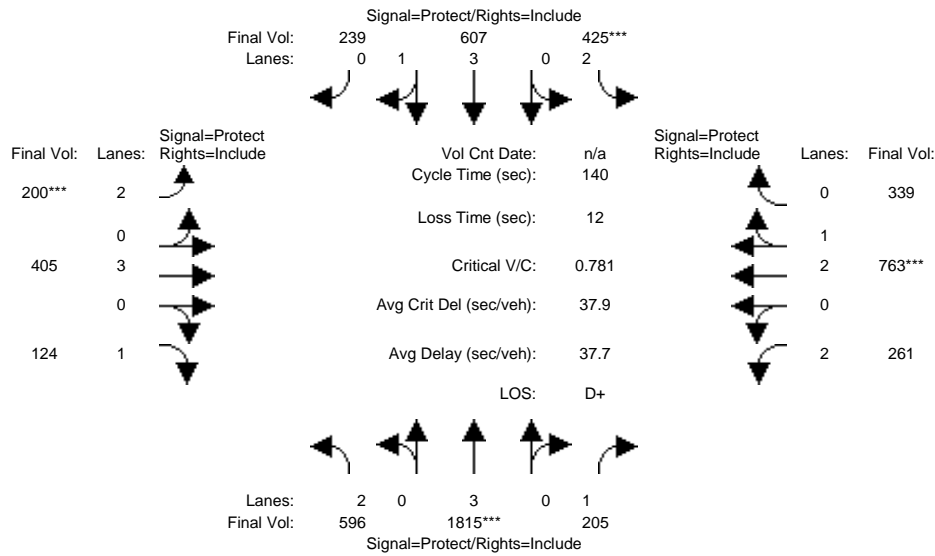

Street Name:	De Anza Boulevard						Stevens Creek Boulevard					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0

Volume Module:												
Base Vol:	564	1728	195	404	574	226	189	379	114	248	723	323
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	564	1728	195	404	574	226	189	379	114	248	723	323
Added Vol:	3	0	0	1	4	2	1	7	4	0	3	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	567	1728	195	405	578	228	190	386	118	248	726	323
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
PHF Volume:	596	1815	205	425	607	239	200	405	124	261	763	339
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	596	1815	205	425	607	239	200	405	124	261	763	339
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	596	1815	205	425	607	239	200	405	124	261	763	339


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	1.00	0.92	0.83	1.00	0.92	0.83	1.00	0.92	0.83	1.00	0.95
Lanes:	2.00	3.00	1.00	2.00	3.00	1.00	2.00	3.00	1.00	2.00	2.04	0.96
Final Sat.:	3150	5700	1750	3150	5700	1750	3150	5700	1750	3150	3873	1723

Capacity Analysis Module:												
Vol/Sat:	0.19	0.32	0.12	0.14	0.11	0.14	0.06	0.07	0.07	0.08	0.20	0.20
Crit Moves:	****			****			****			****		
Green Time:	47.2	57.1	57.1	24.2	34.1	34.1	11.4	21.6	21.6	25.0	35.3	35.3
Volume/Cap:	0.56	0.78	0.29	0.78	0.44	0.56	0.78	0.46	0.46	0.46	0.78	0.78
Delay/Veh:	25.8	21.2	15.2	54.8	35.3	36.9	77.4	54.3	55.1	52.1	51.6	51.6
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	25.8	21.2	15.2	54.8	35.3	36.9	77.4	54.3	55.1	52.1	51.6	51.6
LOS by Move:	C	C+	B	D-	D+	D+	E-	D-	E+	D-	D-	D-
HCM2kAvgQ:	10	19	4	12	6	9	7	5	5	6	16	16

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PM

Intersection #1: De Anza Blvd/Mariani Ave

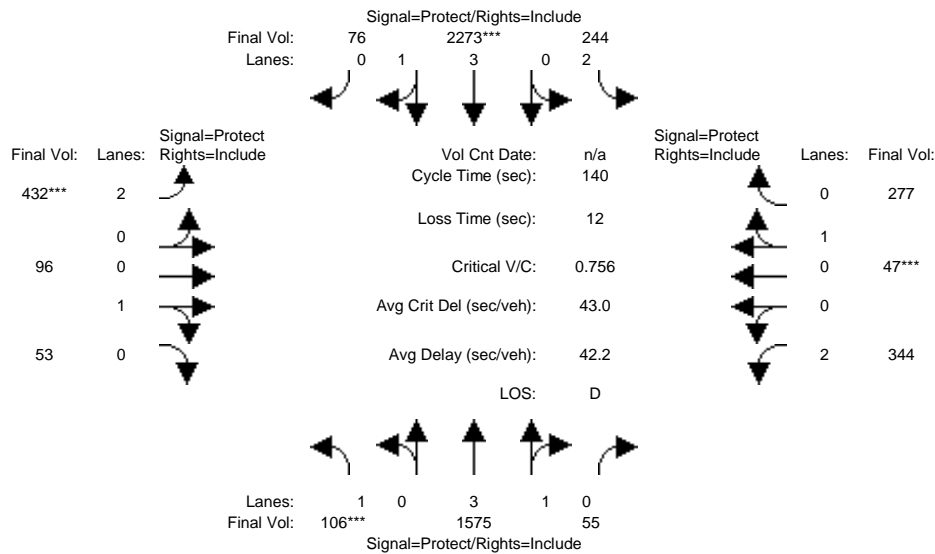

Street Name:	De Anza Blvd						Mariani Ave					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	100	1479	52	229	2134	71	406	90	50	323	44	260
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	100	1479	52	229	2134	71	406	90	50	323	44	260
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	100	1479	52	229	2134	71	406	90	50	323	44	260
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
PHF Volume:	106	1575	55	244	2273	76	432	96	53	344	47	277
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	106	1575	55	244	2273	76	432	96	53	344	47	277
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	106	1575	55	244	2273	76	432	96	53	344	47	277


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.83	0.99	0.95	0.83	0.95	0.95	0.83	0.95	0.95
Lanes:	1.00	3.86	0.14	2.00	3.87	0.13	2.00	0.64	0.36	2.00	0.14	0.86
Final Sat.:	1750	7245	255	3150	7258	241	3150	1157	643	3150	261	1539

Capacity Analysis Module:												
Vol/Sat:	0.06	0.22	0.22	0.08	0.31	0.31	0.14	0.08	0.08	0.11	0.18	0.18
Crit Moves:	****			****			****			****		
Green Time:	11.3	51.1	51.1	18.2	58.0	58.0	25.4	25.3	25.3	33.4	33.3	33.3
Volume/Cap:	0.76	0.60	0.60	0.60	0.76	0.76	0.76	0.46	0.46	0.46	0.76	0.76
Delay/Veh:	83.6	36.4	36.4	59.8	36.1	36.1	60.1	52.2	52.2	46.0	57.1	57.1
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	83.6	36.4	36.4	59.8	36.1	36.1	60.1	52.2	52.2	46.0	57.1	57.1
LOS by Move:	F	D+	D+	E+	D+	D+	E	D-	D-	D	E+	E+
HCM2kAvgQ:	5	14	14	7	23	23	12	6	6	8	15	15

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP PM

Intersection #1: De Anza Blvd/Mariani Ave

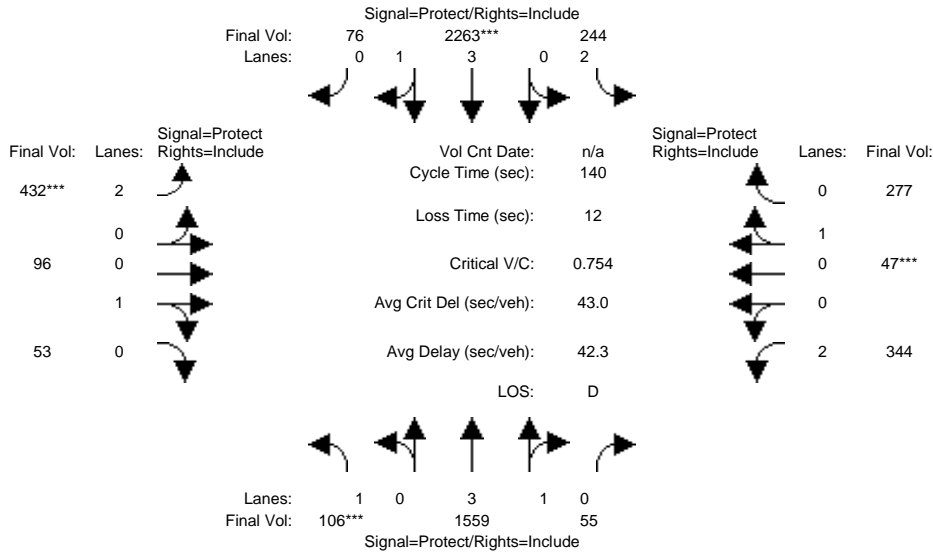

Street Name:	De Anza Blvd						Mariani Ave					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	100	1479	52	229	2134	71	406	90	50	323	44	260
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	100	1479	52	229	2134	71	406	90	50	323	44	260
Added Vol:	0	-15	0	0	-9	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	100	1464	52	229	2125	71	406	90	50	323	44	260
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
PHF Volume:	106	1559	55	244	2263	76	432	96	53	344	47	277
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	106	1559	55	244	2263	76	432	96	53	344	47	277
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	106	1559	55	244	2263	76	432	96	53	344	47	277


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.83	0.99	0.95	0.83	0.95	0.95	0.83	0.95	0.95
Lanes:	1.00	3.86	0.14	2.00	3.87	0.13	2.00	0.64	0.36	2.00	0.14	0.86
Final Sat.:	1750	7242	257	3150	7257	242	3150	1157	643	3150	261	1539

Capacity Analysis Module:												
Vol/Sat:	0.06	0.22	0.22	0.08	0.31	0.31	0.14	0.08	0.08	0.11	0.18	0.18
Crit Moves:	***			****			****			****		
Green Time:	11.3	50.9	50.9	18.3	57.9	57.9	25.5	25.4	25.4	33.5	33.4	33.4
Volume/Cap:	0.75	0.59	0.59	0.59	0.75	0.75	0.75	0.46	0.46	0.46	0.75	0.75
Delay/Veh:	83.4	36.5	36.5	59.7	36.1	36.1	60.0	52.2	52.2	45.9	57.0	57.0
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	83.4	36.5	36.5	59.7	36.1	36.1	60.0	52.2	52.2	45.9	57.0	57.0
LOS by Move:	F	D+	D+	E+	D+	D+	E+	D-	D-	D	E+	E+
HCM2kAvgQ:	5	14	14	7	22	22	12	6	6	8	15	15

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PM

Intersection #2: De Anza Blvd/Lazaneo Dr

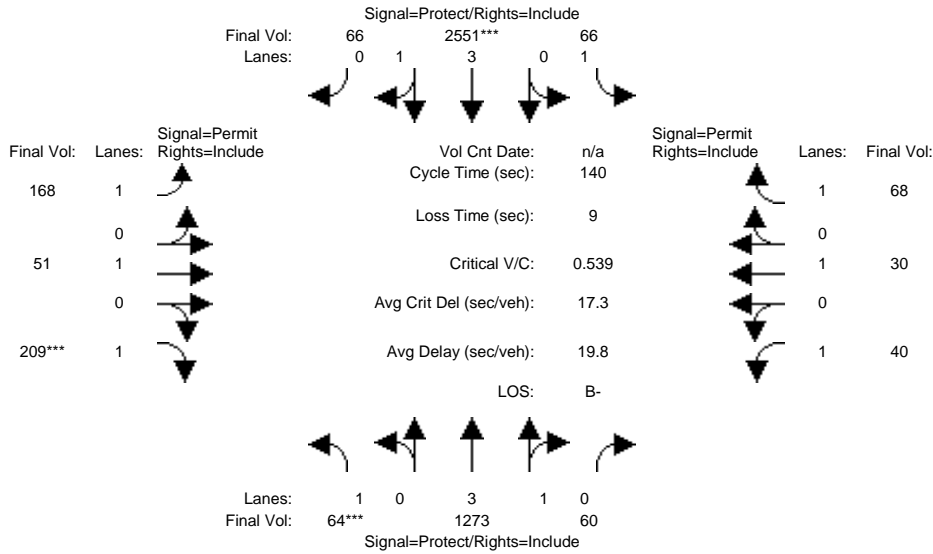

Street Name:	De Anza Blvd						Lazaneo Dr					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	10	10	10	10	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	60	1202	57	62	2408	62	159	48	197	38	28	64
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	60	1202	57	62	2408	62	159	48	197	38	28	64
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	60	1202	57	62	2408	62	159	48	197	38	28	64
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
PHF Volume:	64	1273	60	66	2551	66	168	51	209	40	30	68
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	64	1273	60	66	2551	66	168	51	209	40	30	68
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	64	1273	60	66	2551	66	168	51	209	40	30	68


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.92	0.99	0.95	0.92	1.00	0.92	0.92	1.00	0.92
Lanes:	1.00	3.81	0.19	1.00	3.90	0.10	1.00	1.00	1.00	1.00	1.00	1.00
Final Sat.:	1750	7160	340	1750	7311	188	1750	1900	1750	1750	1900	1750

Capacity Analysis Module:												
Vol/Sat:	0.04	0.18	0.18	0.04	0.35	0.35	0.10	0.03	0.12	0.02	0.02	0.04
Crit Moves:	****			****			****					
Green Time:	9.4	78.1	78.1	22.0	90.6	90.6	31.0	31.0	31.0	31.0	31.0	31.0
Volume/Cap:	0.54	0.32	0.32	0.24	0.54	0.54	0.44	0.12	0.54	0.10	0.07	0.18
Delay/Veh:	68.1	16.7	16.7	52.2	13.5	13.5	47.8	43.8	49.7	43.6	43.2	44.4
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	68.1	16.7	16.7	52.2	13.5	13.5	47.8	43.8	49.7	43.6	43.2	44.4
LOS by Move:	E	B	B	D-	B	B	D	D	D	D	D	D
HCM2kAvgQ:	4	8	8	3	15	15	7	2	9	1	1	3

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP PM

Intersection #2: De Anza Blvd/Lazaneo Dr

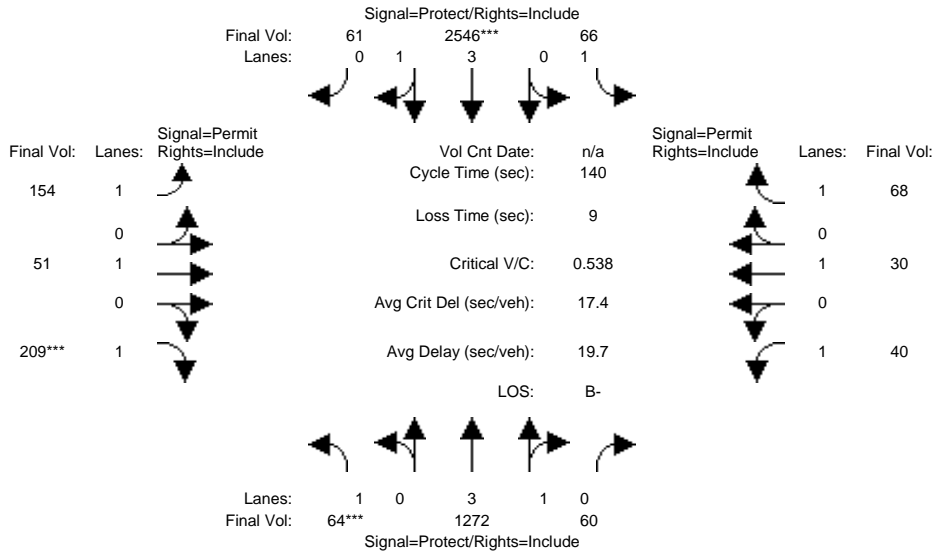

Street Name:	De Anza Blvd						Lazaneo Dr					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	10	10	10	10	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	60	1202	57	62	2408	62	159	48	197	38	28	64
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	60	1202	57	62	2408	62	159	48	197	38	28	64
Added Vol:	0	-1	0	0	-5	-4	-14	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	60	1201	57	62	2403	58	145	48	197	38	28	64
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
PHF Volume:	64	1272	60	66	2546	61	154	51	209	40	30	68
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	64	1272	60	66	2546	61	154	51	209	40	30	68
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	64	1272	60	66	2546	61	154	51	209	40	30	68


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.92	0.99	0.95	0.92	1.00	0.92	0.92	1.00	0.92
Lanes:	1.00	3.81	0.19	1.00	3.90	0.10	1.00	1.00	1.00	1.00	1.00	1.00
Final Sat.:	1750	7160	340	1750	7323	177	1750	1900	1750	1750	1900	1750

Capacity Analysis Module:												
Vol/Sat:	0.04	0.18	0.18	0.04	0.35	0.35	0.09	0.03	0.12	0.02	0.02	0.04
Crit Moves:	***			***			***			***		
Green Time:	9.5	78.0	78.0	21.9	90.5	90.5	31.0	31.0	31.0	31.0	31.0	31.0
Volume/Cap:	0.54	0.32	0.32	0.24	0.54	0.54	0.40	0.12	0.54	0.10	0.07	0.17
Delay/Veh:	68.0	16.7	16.7	52.2	13.5	13.5	47.1	43.7	49.6	43.5	43.1	44.3
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	68.0	16.7	16.7	52.2	13.5	13.5	47.1	43.7	49.6	43.5	43.1	44.3
LOS by Move:	E	B	B	D-	B	B	D	D	D	D	D	D
HCM2kAvgQ:	4	8	8	3	15	15	6	2	9	1	1	3

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
 DC16-0009  
 Existing and Existing PP PM  
 Level Of Service Computation Report  
 2000 HCM 4-Way Stop (Future Volume Alternative)  
 Existing PM

Intersection #3: Bandlely Dr/Alves Dr

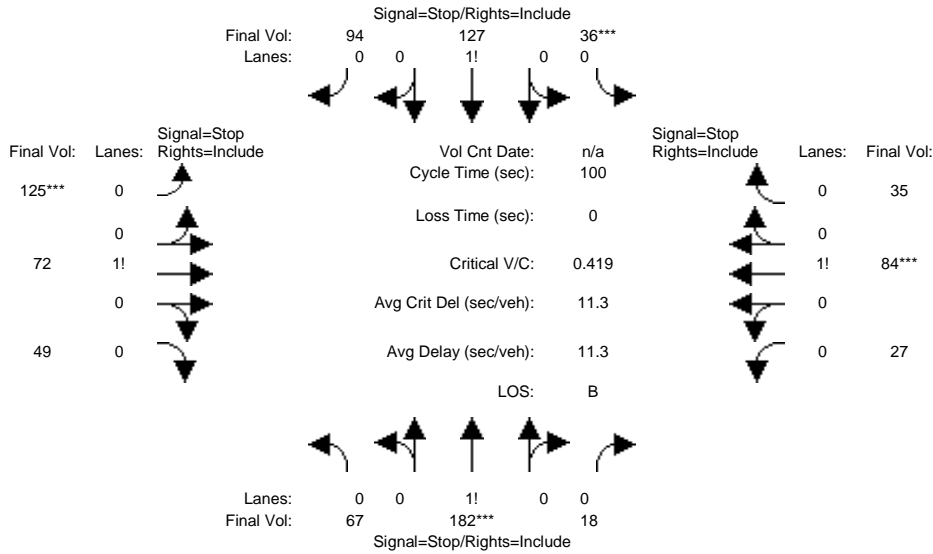

Street Name:	Bandlely Dr						Alves Dr					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R

Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
-------------	---	----	----	---	----	----	---	----	----	---	----	----

Volume Module:

Base Vol:	65	175	17	35	122	91	120	69	47	26	81	34
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	65	175	17	35	122	91	120	69	47	26	81	34
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	65	175	17	35	122	91	120	69	47	26	81	34
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	67	182	18	36	127	94	125	72	49	27	84	35
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	67	182	18	36	127	94	125	72	49	27	84	35
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	67	182	18	36	127	94	125	72	49	27	84	35

Saturation Flow Module:

Adjustment:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lanes:	0.25	0.68	0.07	0.14	0.49	0.37	0.51	0.29	0.20	0.18	0.58	0.24
Final Sat.:	161	433	42	92	322	240	313	180	123	109	339	142

Capacity Analysis Module:

Vol/Sat:	0.42	0.42	0.42	0.39	0.39	0.39	0.40	0.40	0.40	0.25	0.25	0.25
Crit Moves:	****	****	****	****	****	****	****	****	****	****	****	****
Delay/Veh:	11.8	11.8	11.8	11.1	11.1	11.1	11.6	11.6	11.6	10.1	10.1	10.1
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	11.8	11.8	11.8	11.1	11.1	11.1	11.6	11.6	11.6	10.1	10.1	10.1
LOS by Move:	B	B	B	B	B	B	B	B	B	B	B	B
ApproachDel:	11.8			11.1			11.6			10.1		
Delay Adj:	1.00			1.00			1.00			1.00		
ApprAdjDel:	11.8			11.1			11.6			10.1		
LOS by Appr:	B			B			B			B		
AllWayAvgQ:	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.3	0.3	0.3

Note: Queue reported is the number of cars per lane.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
 Intersection #3 Bandlely Dr/Alves Dr  
 \*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Stop Sign			Stop Sign			Stop Sign			Stop Sign		
Lanes:	0	0	1!	0	0	0	0	0	1!	0	0	0
Initial Vol:	65	175	17	35	122	91	120	69	47	26	81	34
Major Street Volume:	505											
Minor Approach Volume:	236											
Minor Approach Volume Threshold:	402											


SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM  
Level Of Service Computation Report  
2000 HCM 4-Way Stop (Future Volume Alternative)  
Existing PP PM

Intersection #3: Bandlely Dr/Alves Dr

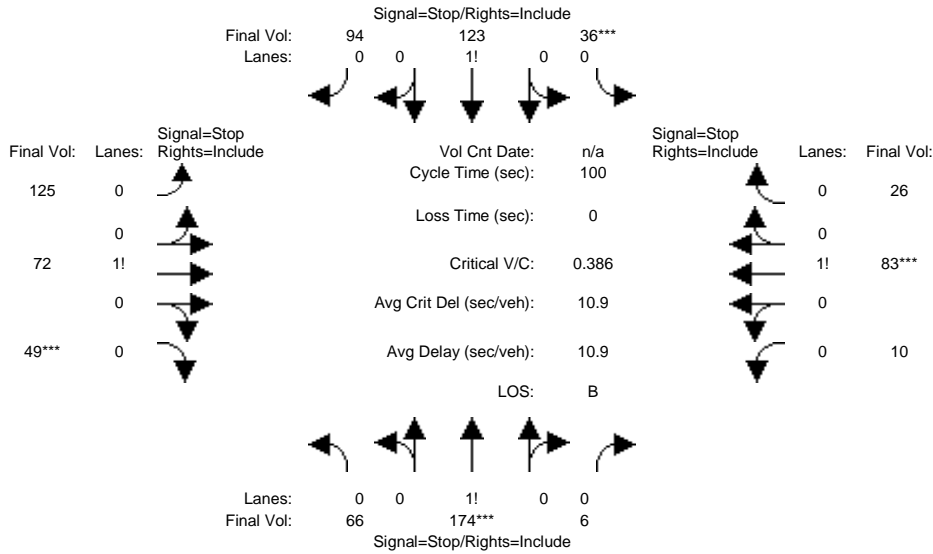

Street Name:	Bandlely Dr						Alves Dr					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R

Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
-------------	---	----	----	---	----	----	---	----	----	---	----	----

Volume Module:

Base Vol:	65	175	17	35	122	91	120	69	47	26	81	34
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	65	175	17	35	122	91	120	69	47	26	81	34
Added Vol:	-1	-7	-11	0	-4	0	0	0	0	-16	-1	-9
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	64	168	6	35	118	91	120	69	47	10	80	25
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	66	174	6	36	123	94	125	72	49	10	83	26
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	66	174	6	36	123	94	125	72	49	10	83	26
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	66	174	6	36	123	94	125	72	49	10	83	26

Saturation Flow Module:

Adjustment:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lanes:	0.27	0.71	0.02	0.14	0.49	0.37	0.51	0.29	0.20	0.09	0.69	0.22
Final Sat.:	174	457	16	97	327	252	323	185	126	52	417	130

Capacity Analysis Module:

Vol/Sat:	0.38	0.38	0.38	0.38	0.38	0.38	0.39	0.39	0.39	0.20	0.20	0.20
Crit Moves:	****			****			****			****		
Delay/Veh:	11.2	11.2	11.2	10.7	10.7	10.7	11.3	11.3	11.3	9.6	9.6	9.6
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	11.2	11.2	11.2	10.7	10.7	10.7	11.3	11.3	11.3	9.6	9.6	9.6
LOS by Move:	B	B	B	B	B	B	B	B	B	A	A	A
ApproachDel:	11.2			10.7			11.3			9.6		
Delay Adj:	1.00			1.00			1.00			1.00		
ApprAdjDel:	11.2			10.7			11.3			9.6		
LOS by Appr:	B			B			B			A		
AllWayAvgQ:	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.2	0.2	0.2

Note: Queue reported is the number of cars per lane.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
Intersection #3 Bandlely Dr/Alves Dr  
\*\*\*\*\*



Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Stop Sign			Stop Sign			Stop Sign			Stop Sign		
Lanes:	0	0	1! 0	0	0	1! 0	0	0	1! 0	0	0	1! 0
Initial Vol:	64	168	6	35	118	91	120	69	47	10	80	25
Major Street Volume:	482											
Minor Approach Volume:	236											
Minor Approach Volume Threshold:	414											

SIGNAL WARRANT DISCLAIMER


This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM

Level Of Service Computation Report  
2000 HCM Unsignalized (Future Volume Alternative)  
Existing PM

Intersection #4: De Anza Blvd/Alves Dr

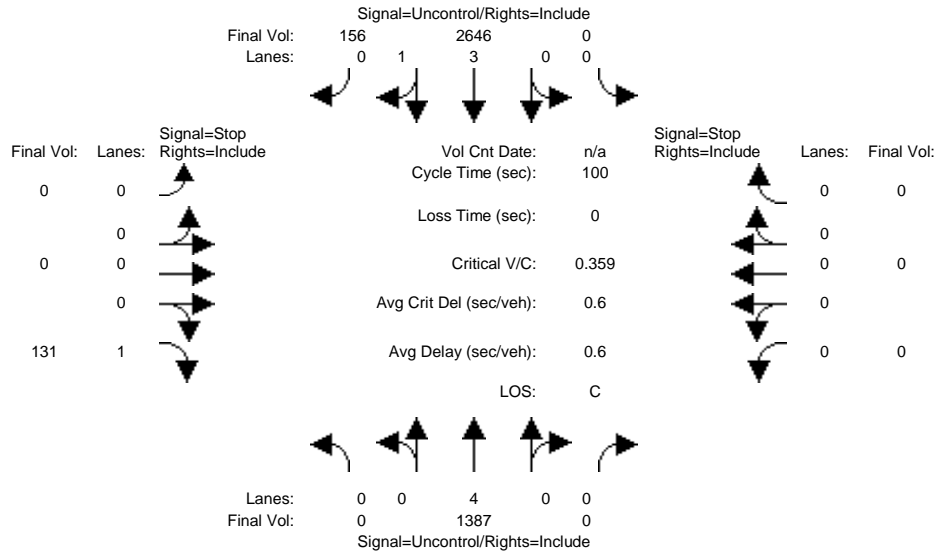

Street Name: De Anza Blvd Alves Dr  
 Approach: North Bound South Bound East Bound West Bound  
 Movement: L - T - R L - T - R L - T - R L - T - R

Volume Module:												
Base Vol:	0	1350	0	0	2575	152	0	0	127	0	0	0
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	1350	0	0	2575	152	0	0	127	0	0	0
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	0	1350	0	0	2575	152	0	0	127	0	0	0
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
PHF Volume:	0	1387	0	0	2646	156	0	0	131	0	0	0
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
FinalVolume:	0	1387	0	0	2646	156	0	0	131	0	0	0

Critical Gap Module:												
Critical Gp:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	6.9	xxxxx	xxxx	xxxxx
FollowUpTim:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	3.3	xxxxx	xxxx	xxxxx

Capacity Module:												
Cnflct Vol:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	740	xxxx	xxxx	xxxxx
Potent Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	364	xxxx	xxxx	xxxxx
Move Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	364	xxxx	xxxx	xxxxx
Volume/Cap:	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	0.36	xxxx	xxxx	xxxx

Level Of Service Module:												
2Way95thQ:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	1.6	xxxx	xxxx	xxxxx
Control Del:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	20.3	xxxxx	xxxx	xxxxx
LOS by Move:	*	*	*	*	*	*	*	*	C	*	*	*
Movement:	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT		LT - LTR - RT	LT - LTR - RT	
Shared Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx
SharedQueue:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shrd ConDel:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shared LOS:	*	*	*	*	*	*	*	*	*	*	*	*
ApproachDel:	xxxxxxx			xxxxxxx					20.3	xxxxxxx		
ApproachLOS:	*			*					C	*		*

Note: Queue reported is the number of cars per lane.

Peak Hour Delay Signal Warrant Report

\*\*\*\*\*

Intersection #4 De Anza Blvd/Alves Dr

\*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 1350 0	0 2575 152	0 0 127	0 0 0
ApproachDel:	xxxxxx	xxxxxx	20.3	xxxxxx

Approach[eastbound][lanes=1][control=Stop Sign]  
 Signal Warrant Rule #1: [vehicle-hours=0.7]  
 FAIL - Vehicle-hours less than 4 for one lane approach.  
 Signal Warrant Rule #2: [approach volume=127]  
 SUCCEED - Approach volume greater than or equal to 100 for one lane approach.  
 Signal Warrant Rule #3: [approach count=3][total volume=4204]  
 SUCCEED - Total volume greater than or equal to 650 for intersection with less than four approaches.

SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
 Intersection #4 De Anza Blvd/Alves Dr  
 \*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 1350 0	0 2575 152	0 0 127	0 0 0

Major Street Volume: 4077  
 Minor Approach Volume: 127  
 Minor Approach Volume Threshold: -199 [less than minimum of 100]

SIGNAL WARRANT DISCLAIMER


This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM

Level Of Service Computation Report  
2000 HCM Unsignalized (Future Volume Alternative)  
Existing PP PM

Intersection #4: De Anza Blvd/Alves Dr

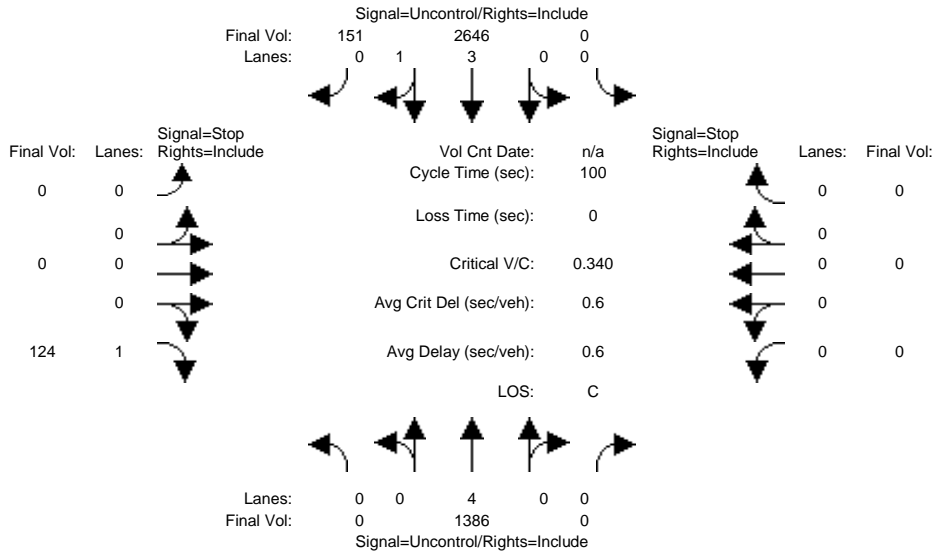

Street Name: De Anza Blvd Alves Dr  
 Approach: North Bound South Bound East Bound West Bound  
 Movement: L - T - R L - T - R L - T - R L - T - R

Volume Module:												
Base Vol:	0	1350	0	0	2575	152	0	0	127	0	0	0
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	1350	0	0	2575	152	0	0	127	0	0	0
Added Vol:	0	-1	0	0	0	-5	0	0	-6	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	0	1349	0	0	2575	147	0	0	121	0	0	0
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
PHF Volume:	0	1386	0	0	2646	151	0	0	124	0	0	0
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
FinalVolume:	0	1386	0	0	2646	151	0	0	124	0	0	0

Critical Gap Module:												
Critical Gp:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	6.9	xxxxx	xxxx	xxxxx
FollowUpTim:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	3.3	xxxxx	xxxx	xxxxx

Capacity Module:												
Cnflct Vol:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	737	xxxx	xxxx	xxxxx
Potent Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	365	xxxx	xxxx	xxxxx
Move Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	365	xxxx	xxxx	xxxxx
Volume/Cap:	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	0.34	xxxx	xxxx	xxxx

Level Of Service Module:												
2Way95thQ:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	1.5	xxxx	xxxx	xxxxx
Control Del:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	19.9	xxxxx	xxxx	xxxxx
LOS by Move:	*	*	*	*	*	*	*	*	C	*	*	*
Movement:	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT		LT - LTR - RT	LT - LTR - RT	LT - LTR - RT
Shared Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx
SharedQueue:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shrd ConDel:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shared LOS:	*	*	*	*	*	*	*	*	*	*	*	*
ApproachDel:	xxxxxxx			xxxxxxx					19.9	xxxxxxx		
ApproachLOS:	*			*					C	*		*

Note: Queue reported is the number of cars per lane.

Peak Hour Delay Signal Warrant Report

\*\*\*\*\*  
Intersection #4 De Anza Blvd/Alves Dr  
\*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 1349 0	0 2575 147	0 0 121	0 0 0
ApproachDel:	xxxxxx	xxxxxx	19.9	xxxxxx

Approach[eastbound][lanes=1][control=Stop Sign]  
 Signal Warrant Rule #1: [vehicle-hours=0.7]  
 FAIL - Vehicle-hours less than 4 for one lane approach.  
 Signal Warrant Rule #2: [approach volume=121]  
 SUCCEED - Approach volume greater than or equal to 100 for one lane approach.  
 Signal Warrant Rule #3: [approach count=3][total volume=4192]  
 SUCCEED - Total volume greater than or equal to 650 for intersection with less than four approaches.

SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
 Intersection #4 De Anza Blvd/Alves Dr  
 \*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 1349 0	0 2575 147	0 0 121	0 0 0

Major Street Volume: 4071  
 Minor Approach Volume: 121  
 Minor Approach Volume Threshold: -199 [less than minimum of 100]


SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PM

Intersection #5: Mary Ave/Stevens Creek Blvd

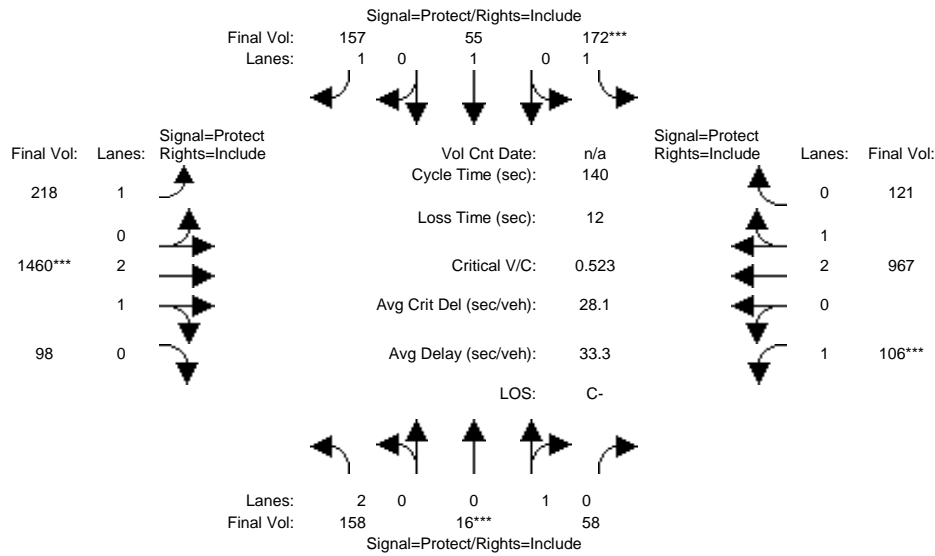

Street Name:	Mary Ave						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	152	15	56	166	53	151	210	1406	94	102	931	117
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	152	15	56	166	53	151	210	1406	94	102	931	117
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	152	15	56	166	53	151	210	1406	94	102	931	117
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	158	16	58	172	55	157	218	1460	98	106	967	121
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	158	16	58	172	55	157	218	1460	98	106	967	121
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	158	16	58	172	55	157	218	1460	98	106	967	121


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	0.95	0.95	0.92	1.00	0.92	0.92	0.98	0.95	0.92	0.99	0.95
Lanes:	2.00	0.21	0.79	1.00	1.00	1.00	1.00	2.81	0.19	1.00	2.65	0.35
Final Sat.:	3150	380	1420	1750	1900	1750	1750	5249	351	1750	4974	625

Capacity Analysis Module:												
Vol/Sat:	0.05	0.04	0.04	0.10	0.03	0.09	0.12	0.28	0.28	0.06	0.19	0.19
Crit Moves:	****			****			****			****		
Green Time:	13.4	11.0	11.0	26.4	23.9	23.9	35.4	74.5	74.5	16.2	55.2	55.2
Volume/Cap:	0.52	0.52	0.52	0.52	0.17	0.52	0.49	0.52	0.52	0.52	0.49	0.49
Delay/Veh:	62.0	65.5	65.5	52.7	49.8	54.5	45.5	21.4	21.4	60.7	32.0	32.0
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	62.0	65.5	65.5	52.7	49.8	54.5	45.5	21.4	21.4	60.7	32.0	32.0
LOS by Move:	E	E	E	D-	D	D-	D	C+	C+	E	C-	C-
HCM2kAvgQ:	5	4	4	8	2	7	9	14	14	4	11	11

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP PM

Intersection #5: Mary Ave/Stevens Creek Blvd

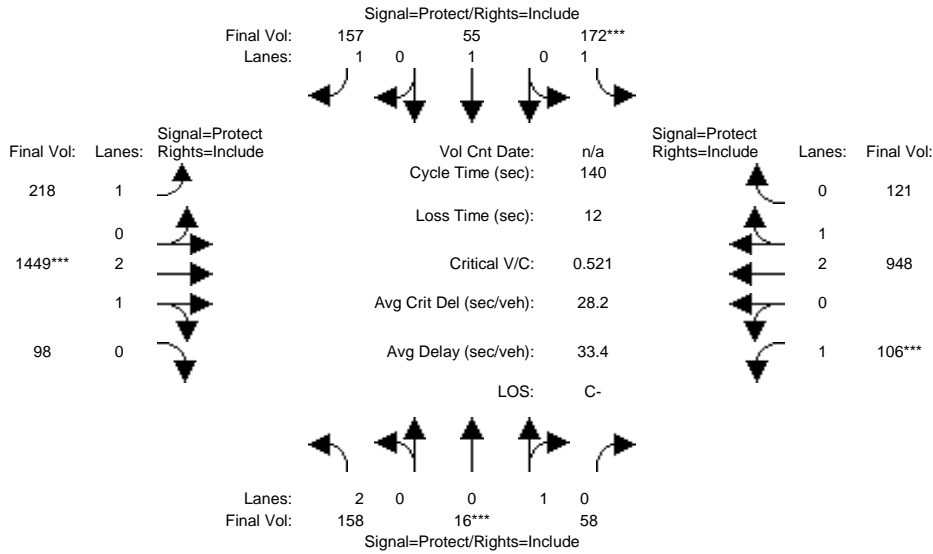

Street Name:	Mary Ave						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:												
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	152	15	56	166	53	151	210	1406	94	102	931	117
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	152	15	56	166	53	151	210	1406	94	102	931	117
Added Vol:	0	0	0	0	0	0	0	-11	0	0	-18	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	152	15	56	166	53	151	210	1395	94	102	913	117
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	158	16	58	172	55	157	218	1449	98	106	948	121
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	158	16	58	172	55	157	218	1449	98	106	948	121
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	158	16	58	172	55	157	218	1449	98	106	948	121

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	0.95	0.95	0.92	1.00	0.92	0.92	0.98	0.95	0.92	0.99	0.95
Lanes:	2.00	0.21	0.79	1.00	1.00	1.00	1.00	2.80	0.20	1.00	2.65	0.35
Final Sat.:	3150	380	1420	1750	1900	1750	1750	5246	353	1750	4963	636


Capacity Analysis Module:												
Vol/Sat:	0.05	0.04	0.04	0.10	0.03	0.09	0.12	0.28	0.28	0.06	0.19	0.19
Crit Moves:	****			****			****			****		
Green Time:	13.4	11.0	11.0	26.5	24.0	24.0	35.7	74.2	74.2	16.3	54.8	54.8
Volume/Cap:	0.52	0.52	0.52	0.52	0.17	0.52	0.49	0.52	0.52	0.52	0.49	0.49
Delay/Veh:	61.9	65.4	65.4	52.5	49.7	54.4	45.2	21.5	21.5	60.6	32.2	32.2
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	61.9	65.4	65.4	52.5	49.7	54.4	45.2	21.5	21.5	60.6	32.2	32.2
LOS by Move:	E	E	E	D-	D	D-	D	C+	C+	E	C-	C-
HCM2kAvgQ:	5	4	4	8	2	7	9	14	14	4	11	11

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PM

Intersection #6: Stevens Creek Blvd/Stelling Rd 1613-217 [CMP 2010]

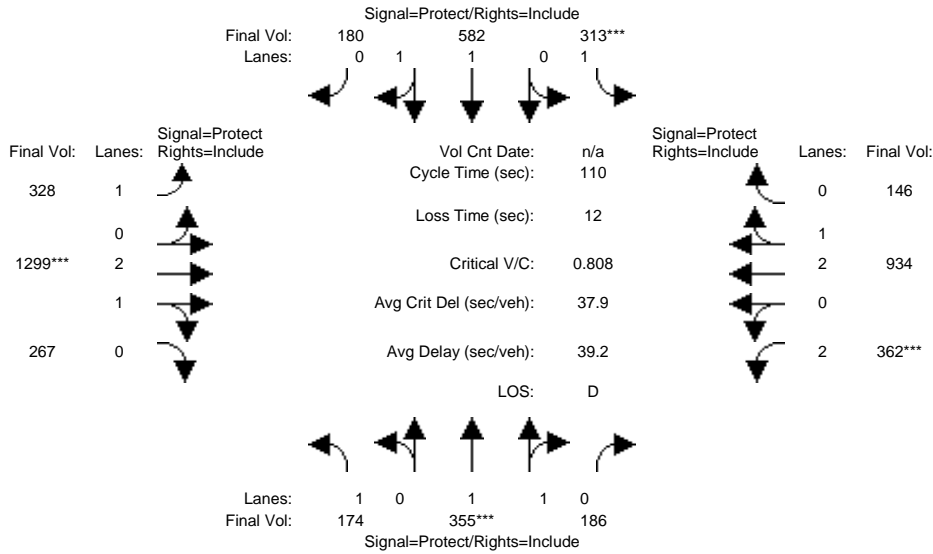

Street Name:	Stelling Road						Stevens Creek Boulevard					
	North Bound			South Bound			East Bound			West Bound		
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	169	344	180	303	564	174	318	1259	259	351	905	141
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	169	344	180	303	564	174	318	1259	259	351	905	141
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	169	344	180	303	564	174	318	1259	259	351	905	141
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
PHF Volume:	174	355	186	313	582	180	328	1299	267	362	934	146
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	174	355	186	313	582	180	328	1299	267	362	934	146
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	174	355	186	313	582	180	328	1299	267	362	934	146

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.92	0.98	0.95	0.92	0.99	0.95	0.83	0.99	0.95
Lanes:	1.00	1.29	0.71	1.00	1.52	0.48	1.00	2.47	0.53	2.00	2.58	0.42
Final Sat.:	1750	2428	1270	1750	2827	872	1750	4643	955	3150	4844	755

Capacity Analysis Module:												
Vol/Sat:	0.10	0.15	0.15	0.18	0.21	0.21	0.19	0.28	0.28	0.11	0.19	0.19
Crit Moves:	****			****			****			****		
Green Time:	14.4	19.9	19.9	24.3	29.8	29.8	26.5	38.1	38.1	15.7	27.3	27.3
Volume/Cap:	0.76	0.81	0.81	0.81	0.76	0.76	0.78	0.81	0.81	0.81	0.78	0.78
Delay/Veh:	66.9	53.3	53.3	57.0	42.2	42.2	44.0	24.8	24.8	55.1	34.5	34.5
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	66.9	53.3	53.3	57.0	42.2	42.2	44.0	24.8	24.8	55.1	34.5	34.5
LOS by Move:	E	D-	D-	E+	D	D	D	C	C	E+	C-	C-
HCM2kAvgQ:	8	11	11	13	14	14	11	16	16	8	12	12


Note: Queue reported is the number of cars per lane.



Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP PM

Intersection #6: Stevens Creek Blvd/Stelling Rd 1613-217 [CMP 2010]

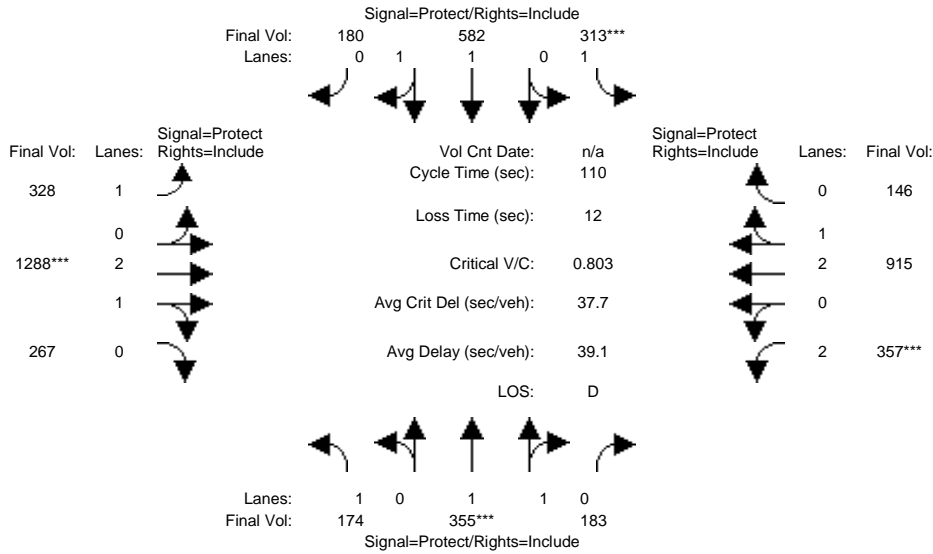

Street Name:	Stelling Road						Stevens Creek Boulevard					
	North Bound			South Bound			East Bound			West Bound		
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	169	344	180	303	564	174	318	1259	259	351	905	141
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	169	344	180	303	564	174	318	1259	259	351	905	141
Added Vol:	0	0	-3	0	0	0	0	-11	0	-5	-18	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	169	344	177	303	564	174	318	1248	259	346	887	141
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
PHF Volume:	174	355	183	313	582	180	328	1288	267	357	915	146
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	174	355	183	313	582	180	328	1288	267	357	915	146
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	174	355	183	313	582	180	328	1288	267	357	915	146


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.92	0.98	0.95	0.92	0.99	0.95	0.83	0.99	0.95
Lanes:	1.00	1.30	0.70	1.00	1.52	0.48	1.00	2.47	0.53	2.00	2.57	0.43
Final Sat.:	1750	2442	1257	1750	2827	872	1750	4636	962	3150	4831	768

Capacity Analysis Module:												
Vol/Sat:	0.10	0.15	0.15	0.18	0.21	0.21	0.19	0.28	0.28	0.11	0.19	0.19
Crit Moves:	****			****			****			****		
Green Time:	14.5	19.9	19.9	24.5	29.9	29.9	26.7	38.1	38.1	15.5	26.9	26.9
Volume/Cap:	0.76	0.80	0.80	0.80	0.76	0.76	0.77	0.80	0.80	0.80	0.77	0.77
Delay/Veh:	66.6	53.0	53.0	56.4	42.0	42.0	43.5	24.7	24.7	54.9	34.6	34.6
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	66.6	53.0	53.0	56.4	42.0	42.0	43.5	24.7	24.7	54.9	34.6	34.6
LOS by Move:	E	D-	D-	E+	D	D	D	C	C	D-	C-	C-
HCM2kAvgQ:	8	11	11	13	14	14	11	16	16	8	12	12

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PM

**Intersection #7: Saich Way/Stevens Creek Blvd**

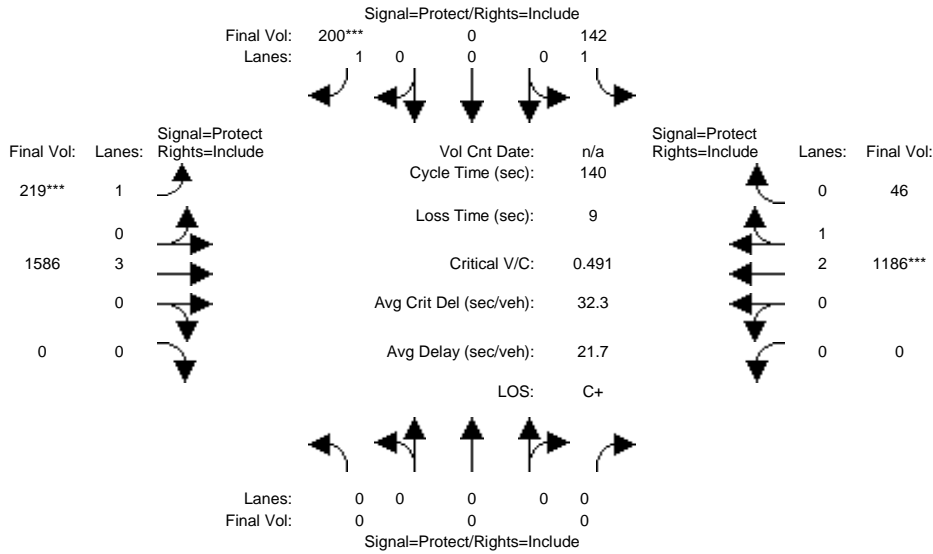

Street Name:	Saich Way						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	0	0	0	132	0	186	204	1477	0	0	1104	43
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	0	0	132	0	186	204	1477	0	0	1104	43
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	0	0	0	132	0	186	204	1477	0	0	1104	43
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
PHF Volume:	0	0	0	142	0	200	219	1586	0	0	1186	46
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	0	0	0	142	0	200	219	1586	0	0	1186	46
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	0	0	0	142	0	200	219	1586	0	0	1186	46

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	1.00	0.92	0.92	1.00	0.92	0.92	1.00	0.92	0.92	0.98	0.95
Lanes:	0.00	0.00	0.00	1.00	0.00	1.00	1.00	3.00	0.00	0.00	2.88	0.12
Final Sat.:	0	0	0	1750	0	1750	1750	5700	0	0	5390	210


Capacity Analysis Module:												
Vol/Sat:	0.00	0.00	0.00	0.08	0.00	0.11	0.13	0.28	0.00	0.00	0.22	0.22
Crit Moves:						****	****				****	
Green Time:	0.0	0.0	0.0	32.6	0.0	32.6	35.7	98.4	0.0	0.0	62.7	62.7
Volume/Cap:	0.00	0.00	0.00	0.35	0.00	0.49	0.49	0.40	0.00	0.00	0.49	0.49
Delay/Veh:	0.0	0.0	0.0	45.4	0.0	47.5	45.3	8.6	0.0	0.0	27.5	27.5
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	0.0	0.0	0.0	45.4	0.0	47.5	45.3	8.6	0.0	0.0	27.5	27.5
LOS by Move:	A	A	A	D	A	D	D	A	A	A	C	C
HCM2kAvgQ:	0	0	0	6	0	8	8	9	0	0	12	12

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP PM

Intersection #7: Saich Way/Stevens Creek Blvd

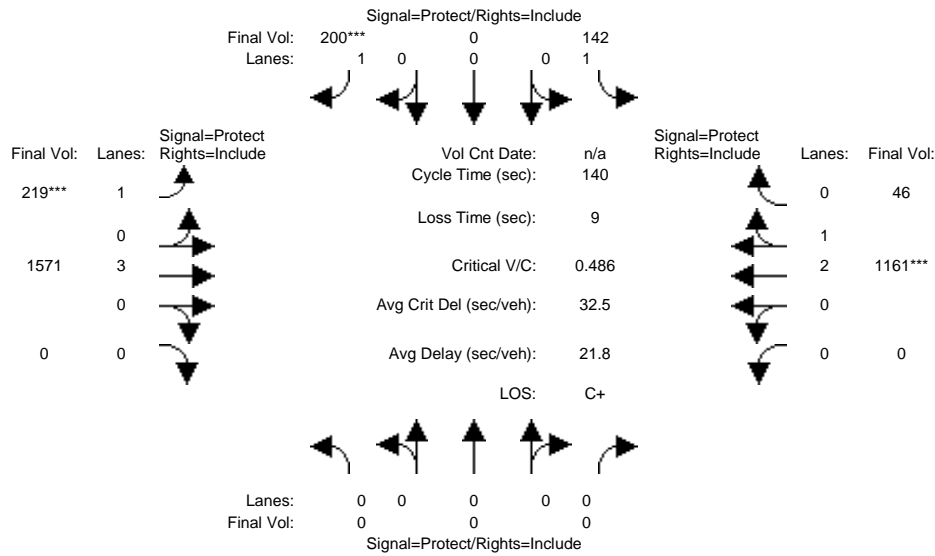

Street Name:	Saich Way						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	0	0	0	132	0	186	204	1477	0	0	1104	43
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	0	0	132	0	186	204	1477	0	0	1104	43
Added Vol:	0	0	0	0	0	0	0	-14	0	0	-23	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	0	0	0	132	0	186	204	1463	0	0	1081	43
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
PHF Volume:	0	0	0	142	0	200	219	1571	0	0	1161	46
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	0	0	0	142	0	200	219	1571	0	0	1161	46
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	0	0	0	142	0	200	219	1571	0	0	1161	46


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	1.00	0.92	0.92	1.00	0.92	0.92	1.00	0.92	0.92	0.98	0.95
Lanes:	0.00	0.00	0.00	1.00	0.00	1.00	1.00	3.00	0.00	0.00	2.88	0.12
Final Sat.:	0	0	0	1750	0	1750	1750	5700	0	0	5385	214

Capacity Analysis Module:												
Vol/Sat:	0.00	0.00	0.00	0.08	0.00	0.11	0.13	0.28	0.00	0.00	0.22	0.22
Crit Moves:						****	****				****	
Green Time:	0.0	0.0	0.0	32.9	0.0	32.9	36.1	98.1	0.0	0.0	62.1	62.1
Volume/Cap:	0.00	0.00	0.00	0.35	0.00	0.49	0.49	0.39	0.00	0.00	0.49	0.49
Delay/Veh:	0.0	0.0	0.0	45.1	0.0	47.2	44.9	8.7	0.0	0.0	27.8	27.8
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	0.0	0.0	0.0	45.1	0.0	47.2	44.9	8.7	0.0	0.0	27.8	27.8
LOS by Move:	A	A	A	D	A	D	D	A	A	A	C	C
HCM2kAvgQ:	0	0	0	6	0	8	8	9	0	0	12	12

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PM

Intersection #8: Bandlely Dr/Stevens Creek Blvd

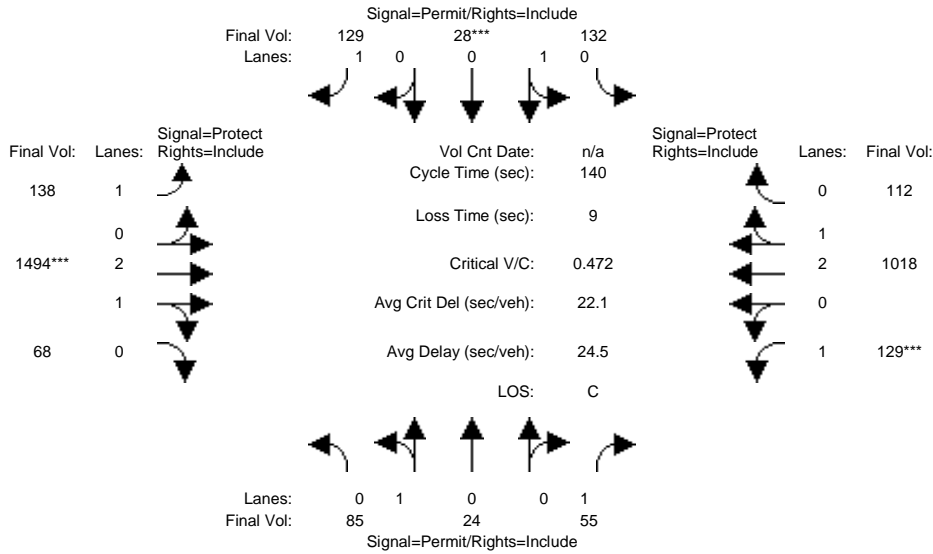

Street Name:	Bandlely Dr						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:												
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	10	10	10	10	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	82	23	53	127	27	124	133	1437	65	124	979	108
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	82	23	53	127	27	124	133	1437	65	124	979	108
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	82	23	53	127	27	124	133	1437	65	124	979	108
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	85	24	55	132	28	129	138	1494	68	129	1018	112
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	85	24	55	132	28	129	138	1494	68	129	1018	112
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	85	24	55	132	28	129	138	1494	68	129	1018	112


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.95	0.95	0.92	0.95	0.95	0.92	0.92	0.98	0.95	0.92	0.99	0.95
Lanes:	0.78	0.22	1.00	0.82	0.18	1.00	1.00	2.87	0.13	1.00	2.69	0.31
Final Sat.:	1406	394	1750	1484	316	1750	1750	5357	242	1750	5043	556

Capacity Analysis Module:												
Vol/Sat:	0.06	0.06	0.03	0.09	0.09	0.07	0.08	0.28	0.28	0.07	0.20	0.20
Crit Moves:					****			****			****	
Green Time:	26.4	26.4	26.4	26.4	26.4	26.4	29.4	82.7	82.7	21.9	75.2	75.2
Volume/Cap:	0.32	0.32	0.17	0.47	0.47	0.39	0.38	0.47	0.47	0.47	0.38	0.38
Delay/Veh:	49.6	49.6	47.8	51.6	51.6	50.5	48.1	16.3	16.3	55.1	18.9	18.9
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	49.6	49.6	47.8	51.6	51.6	50.5	48.1	16.3	16.3	55.1	18.9	18.9
LOS by Move:	D	D	D	D-	D-	D	D	B	B	E+	B-	B-
HCM2kAvgQ:	4	4	2	7	7	5	5	12	12	6	9	9

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP PM

Intersection #8: Bandlely Dr/Stevens Creek Blvd

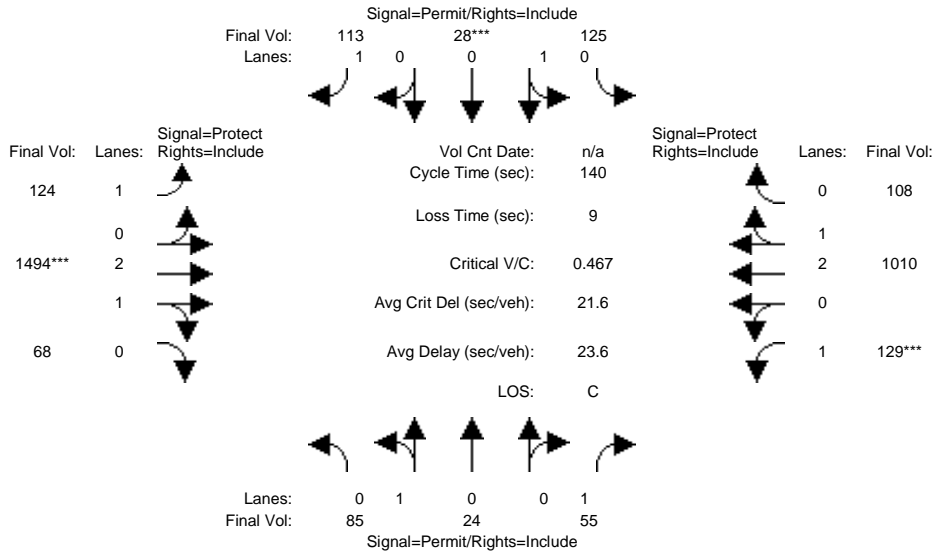

Street Name:	Bandlely Dr						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	10	10	10	10	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	82	23	53	127	27	124	133	1437	65	124	979	108
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	82	23	53	127	27	124	133	1437	65	124	979	108
Added Vol:	0	0	0	-7	0	-15	-14	0	0	0	-7	-4
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	82	23	53	120	27	109	119	1437	65	124	972	104
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	85	24	55	125	28	113	124	1494	68	129	1010	108
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	85	24	55	125	28	113	124	1494	68	129	1010	108
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	85	24	55	125	28	113	124	1494	68	129	1010	108

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.95	0.95	0.92	0.95	0.95	0.92	0.92	0.98	0.95	0.92	0.99	0.95
Lanes:	0.78	0.22	1.00	0.82	0.18	1.00	1.00	2.87	0.13	1.00	2.70	0.30
Final Sat.:	1406	394	1750	1469	331	1750	1750	5357	242	1750	5058	541


Capacity Analysis Module:												
Vol/Sat:	0.06	0.06	0.03	0.08	0.08	0.06	0.07	0.28	0.28	0.07	0.20	0.20
Crit Moves:					****			****			****	
Green Time:	25.4	25.4	25.4	25.4	25.4	25.4	27.6	83.5	83.5	22.1	78.0	78.0
Volume/Cap:	0.33	0.33	0.17	0.47	0.47	0.36	0.36	0.47	0.47	0.47	0.36	0.36
Delay/Veh:	50.5	50.5	48.7	52.3	52.3	50.8	49.2	15.9	15.9	54.9	17.2	17.2
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	50.5	50.5	48.7	52.3	52.3	50.8	49.2	15.9	15.9	54.9	17.2	17.2
LOS by Move:	D	D	D	D-	D-	D	D	B	B	D-	B	B
HCM2kAvgQ:	4	4	2	6	6	5	5	12	12	6	9	9

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PM

Intersection #9: De Anza Blvd/Stevens Creek Blvd 1638-211 [CMP 2010]

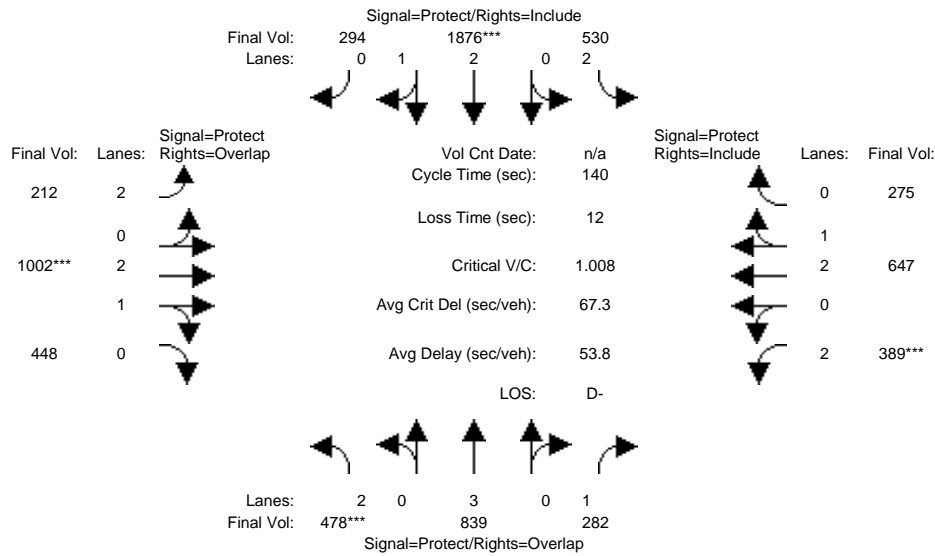

Street Name:	De Anza Boulevard						Stevens Creek Boulevard					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L - T - R			L - T - R			L - T - R			L - T - R		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	470	825	277	521	1844	289	208	985	440	382	636	270
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	470	825	277	521	1844	289	208	985	440	382	636	270
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	470	825	277	521	1844	289	208	985	440	382	636	270
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
PHF Volume:	478	839	282	530	1876	294	212	1002	448	389	647	275
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	478	839	282	530	1876	294	212	1002	448	389	647	275
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	478	839	282	530	1876	294	212	1002	448	389	647	275

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	1.00	0.92	0.83	0.99	0.95	0.83	1.00	0.95	0.83	1.00	0.95
Lanes:	2.00	3.00	1.00	2.00	2.58	0.42	2.00	2.04	0.96	2.00	2.07	0.93
Final Sat.:	3150	5700	1750	3150	4840	759	3150	3869	1728	3150	3929	1668


Capacity Analysis Module:												
Vol/Sat:	0.15	0.15	0.16	0.17	0.39	0.39	0.07	0.26	0.26	0.12	0.16	0.16
Crit Moves:	***				****			****			****	
Green Time:	21.1	35.0	52.1	39.9	53.8	53.8	15.4	36.0	57.0	17.1	37.7	37.7
Volume/Cap:	1.01	0.59	0.43	0.59	1.01	1.01	0.61	1.01	0.64	1.01	0.61	0.61
Delay/Veh:	95.8	36.6	20.4	32.6	46.5	46.5	62.6	77.7	33.8	109.3	45.5	45.5
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	95.8	36.6	20.4	32.6	46.5	46.5	62.6	77.7	33.8	109.3	45.5	45.5
LOS by Move:	F	D+	C+	C-	D	D	E	E-	C-	F	D	D
HCM2kAvgQ:	17	10	7	10	39	39	6	27	15	15	11	11

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Existing and Existing PP PM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Existing PP PM

Intersection #9: De Anza Blvd/Stevens Creek Blvd 1638-211 [CMP 2010]

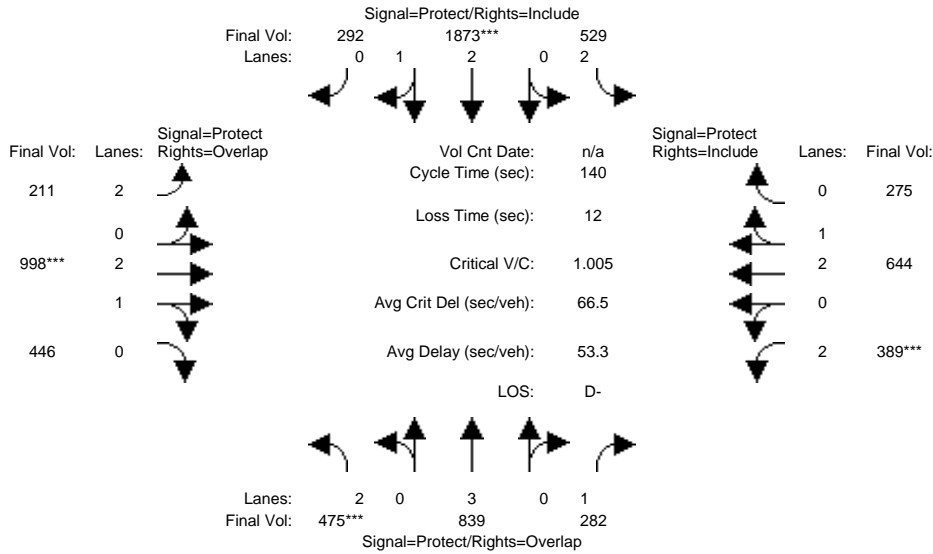

Street Name:	De Anza Boulevard						Stevens Creek Boulevard					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R

Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:

Base Vol:	470	825	277	521	1844	289	208	985	440	382	636	270
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	470	825	277	521	1844	289	208	985	440	382	636	270
Added Vol:	-3	0	0	-1	-3	-2	-1	-4	-2	0	-3	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	467	825	277	520	1841	287	207	981	438	382	633	270
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
PHF Volume:	475	839	282	529	1873	292	211	998	446	389	644	275
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	475	839	282	529	1873	292	211	998	446	389	644	275
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	475	839	282	529	1873	292	211	998	446	389	644	275

Saturation Flow Module:

Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	1.00	0.92	0.83	0.99	0.95	0.83	1.00	0.95	0.83	1.00	0.95
Lanes:	2.00	3.00	1.00	2.00	2.58	0.42	2.00	2.04	0.96	2.00	2.07	0.93
Final Sat.:	3150	5700	1750	3150	4844	755	3150	3869	1728	3150	3923	1673

Capacity Analysis Module:

Vol/Sat:	0.15	0.15	0.16	0.17	0.39	0.39	0.07	0.26	0.26	0.12	0.16	0.16
Crit Moves:	***			****			****			****		
Green Time:	21.0	35.0	52.2	39.9	53.9	53.9	15.4	35.9	56.9	17.2	37.7	37.7
Volume/Cap:	1.00	0.59	0.43	0.59	1.00	1.00	0.61	1.00	0.63	1.00	0.61	0.61
Delay/Veh:	95.1	36.6	20.3	32.6	45.7	45.7	62.6	77.0	33.8	108.4	45.4	45.4
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	95.1	36.6	20.3	32.6	45.7	45.7	62.6	77.0	33.8	108.4	45.4	45.4
LOS by Move:	F	D+	C+	C-	D	D	E	E-	C-	F	D	D
HCM2kAvgQ:	17	10	7	10	38	38	6	27	15	15	11	11

Note: Queue reported is the number of cars per lane.

## **APPENDIX C: MAINSTREET MXD REDUCTIONS**





number of different land uses may take longer to complete. This time estimate includes critical thinking of the land use codes and equation method used.

## 5. MODEL INPUTS

The 'MXD Model Inputs' step generates MXD+ model input parameters based on the location of the project and available background data layers. These background data layers have been prepared by staff in each region of the company. [Please refer to the wiki for a complete list of background data layers.](#)

The available data layers will be presented as options for the user to choose. Based on knowledge of the project area and the data layers available, use engineering judgement to decide which parameters to use for the model analysis. Note that the data layers include national data sources (such as the EPA Smart Location Database and Census/ACS) as well as local data sources (such as regional travel demand models).

Less experienced analysts are urged to consult with more experienced MXD+ users within their offices and throughout the firm regarding the selection of specific input parameters. The chosen parameters form the basis of the MXD+ model inputs, which directly influence the outputs.

Surrounding Area	Site Demographics	Auto Trip Length	Proximity Table	Advanced Input
Employment	Household Size	Vehicle Ownership	Number of Intersections	
Empl. within 1 mile	<input type="text" value="13369"/>	Source: <input type="text" value="MPO Model 2008"/>	Model: <input type="text" value="MPOModel_SACSIM11"/>	
Empl. within 30 minutes	<input type="text" value="0.00921091"/>	Source: <input type="text" value="EPA Smart Location Database (2013) - 2C"/>	Model: <input type="text" value="EPA Smart Location Database (2013) - 2C"/>	

- Demographics (household size and vehicle ownership) are stratified by on site and surrounding area to account for certain projects where the demographics on-site vary significantly from those of the surrounding area. However, most often these values will be the same.
- Analysts who are using MXD+ to also calculate VMT are urged to consult the advanced reference guide regarding VMT input parameters.
- All variables can be set to a custom value based on engineering judgement



Although all the variables in Table 1 influence model outputs, there are certain variables that are more influential than others depending on the sub-model. Table 3 displays the most influential variables for each sub-model.

**TABLE 3 MXD+ MOST INFLUENTIAL VARIABLES BY SUB-MODEL**

Internal Capture	External Walk/Bike	External Transit
Intersection Density	Vehicle Ownership	Vehicle Ownership
Total Area	Empl. within 1 mile	Empl. within 30 min transit
Activity (Population Plus Employment) Density	Intersection Density	Intersection Density

Source: Fehr & Peers 2016.

Table 4 presents appropriate input variable ranges by placetype. The user should use this table to ensure that their inputs are generally reasonable for their project location. These are rough guidelines and are subject to additional engineering judgement.

**TABLE 4 MXD+ APPROPRIATE INPUT VARIABLE RANGE BY PLACETYPE**

Variable	Rural	Suburban	Urban	Urban Center	Urban Core
Intersection Density	20	70	200	250	350
Household Size	3.00	2.85	2.70	2.60	2.50
Vehicle Ownership	2.50	2.00	1.85	1.55	1.15
Empl. within 1 mile	50	1,000	10,000	30,000	60,000
Empl. within 30 minutes transit (as % share of regional empl.)	1%	3%	5%	8%	15%

MainStreet Team engineering judgement based on hundreds of MXD+ applications.  
Source: Fehr & Peers 2016.

The “save and continue” button/function should take 2-3 minutes of model run time to complete and move to the next step. The Model Inputs step should take 20 to 30 minutes of combined analyst and model run time to complete for a first scenario. Additional scenarios should take 10 to 15 minutes. These time estimates include critical thinking of model inputs to ensure that they are appropriate for the scenario being analyzed.



## 6. MODEL OUTPUTS

The 'Model Outputs' step presents the results from each of the trip generation methodologies.

External Vehicle Trip Generation			
Methodology	Daily	AM Peak Hour	PM Peak Hour
ITE	8,481	434	525
ITE Handbook	8,481	400	350
MXD+	4,960	163	208

External VMT			
Methodology	Daily	AM Peak Hour	PM Peak Hour
ITE	67,848	3,906	4,200
ITE Handbook	67,848	3,600	2,800
MXD+	39,680	1,467	1,664

Following are some important clarifying notes regarding this module:

- Pass-by trips are not currently calculated in MXD+ (important to sites with large amounts of retail). Some public agency reviewers of MXD+ results have wondered why pass-by adjustments are not also taken. Our response has often been that not taking a pass-by reduction is considered conservative (and also because the level of pass-by activity at the 239 calibration sites was not known). However, on mixed-use projects with large amounts of retail, the analyst may wish to consider whether a pass-by reduction should be taken.
- Terminology is important depending on audience
  - ITE trip reduction vs. ITE trip shift
    - MXD+ adjusts ITE *Trip Generation Manual* estimates to account for internalized, external transit, and external walk/bike trips. Traditionally this has been described as a “reduction” from ITE *Trip Generation Manual* but it could be also described as a “shift” in ITE trips from all vehicle to a split of vehicle, transit, and walk/bike. The analyst’s audience may determine which terminology is most appropriate.
  - MXD+ is “better” than ITE vs. MXD+ is more accurate than ITE
    - As described above, MXD+ more accurately estimates net vehicle trip generation, especially for mixed-use sites. The analyst should be careful to explain how MXD+ and ITE methodologies are different. Consistent with the FP approach to trip generation analysis, it’s important to use the best tool for the certain project. In some instances, ITE may be appropriate for a given project while MXD+ is not.



- The MXD+ model can report trip reductions/shifts by sub-module (internal capture, external transit, and external walk/bike) and trip purpose (home-based work, home-based other, and non-home based) but has only been validated in the research against net vehicle trip generation.
  - The research indicated that using MXD+ can result in statistically valid estimates of net vehicle trip generation
  - Individual sub-model and trip purpose estimates have not been individually validated. Use with caution and provide additional validation/documentation to support your use
  - Based on brief investigations on various project, it has been found that the internal capture estimate is accurate, walk/bike estimate is high, and the transit estimate is low

#### D. OUTPUT CHECKS

Once an MXD+ analysis has been completed, the outputs should be checked to ensure that they are appropriate for the location and project type. Trust, but verify! Examples of comparisons include: mode share, VMT (normalized by household per per capita), net trips per land use unit. Sources of data for these comparisons include: household travel surveys, regional travel demand models, and Big Data. [Example MXD+ transportation assumptions memos that include output checks can be found on the wiki.](#)



**APPENDIX D: BACKGROUND AND BACKGROUND PLUS PROJECT  
INTERSECTION LEVEL OF SERVICE CALCULATIONS**



Marina Plaza TIA  
DC16-0009  
Background and Background PP AM

Summary Scenario Comparison Report (With Average Critical Delay)  
Future Volume Alternative

Intersection	???				Background AM				Background PP AM						???			
	LOS	Avg Del (sec)	Crit V/C	Avg Crit Del (sec)	LOS	Avg Del (sec)	Crit V/C	Avg Crit Del (sec)	LOS	Avg Del (sec)	Crit V/C	Crit V/C Change	Avg Crit Del (sec)	Avg Crit Del Change	LOS	Avg Del (sec)	Crit V/C	Avg Crit Del (sec)
#1 De Anza Boulevard and Mariani Avenue	?	xx.x	x.xxx	xx.x	D+	36.2	0.752	40.1	D+	36.2	0.756	+ 0.003	40.1	+ 0.0	?	xx.x	x.xxx	xx.x
#2 De Anza Boulevard and Lazaneo Drive	?	xx.x	x.xxx	xx.x	B	17.2	0.511	15.4	B	17.4	0.511	+ 0.000	15.4	- 0.0	?	xx.x	x.xxx	xx.x
#3 Bandlely Drive and Alves Drive	?	xx.x	x.xxx	xx.x	B	11.0	0.427	11.0	B	11.7	0.480	+ 0.053	11.7	+ 0.7	?	xx.x	x.xxx	xx.x
#4 De Anza Boulevard and Alves Drive	?	xx.x	x.xxx	xx.x	B	11.1	0.133	0.3	B	11.2	0.144	+ 0.011	0.3	+ 0.0	?	xx.x	x.xxx	xx.x
#5 Mary Avenue and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	C-	33.7	0.502	36.9	C-	33.5	0.504	+ 0.002	36.8	- 0.1	?	xx.x	x.xxx	xx.x
#6 N. Stelling Road and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	D	43.0	0.706	45.5	D	43.0	0.712	+ 0.006	45.3	- 0.1	?	xx.x	x.xxx	xx.x
#7 Saich Way and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	B	15.3	0.435	19.8	B	15.1	0.442	+ 0.007	19.5	- 0.3	?	xx.x	x.xxx	xx.x
#8 Bandlely Drive and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	B	14.6	0.390	12.0	B	15.7	0.401	+ 0.011	12.9	+ 0.9	?	xx.x	x.xxx	xx.x
#9 De Anza Boulevard and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	D+	39.0	0.813	40.1	D	39.1	0.814	+ 0.001	40.2	+ 0.1	?	xx.x	x.xxx	xx.x


Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM

Summary Scenario Comparison Report (With Average Critical Delay)  
Future Volume Alternative

Intersection	???				Background PM				Background PP PM						???			
	LOS	Avg Del (sec)	Crit V/C	Avg Crit Del (sec)	LOS	Avg Del (sec)	Crit V/C	Avg Crit Del (sec)	LOS	Avg Del (sec)	Crit V/C	Crit V/C Change	Avg Crit Del (sec)	Avg Crit Del Change	LOS	Avg Del (sec)	Crit V/C	Avg Crit Del (sec)
#1 De Anza Boulevard and Mariani Avenue	?	xx.x	x.xxx	xx.x	D	42.1	0.765	42.9	D	42.1	0.763	- 0.001	42.9	+ 0.0	?	xx.x	x.xxx	xx.x
#2 De Anza Boulevard and Lazaneo Drive	?	xx.x	x.xxx	xx.x	B-	19.5	0.548	17.1	B-	19.5	0.547	- 0.001	17.2	+ 0.0	?	xx.x	x.xxx	xx.x
#3 Bandlely Drive and Alves Drive	?	xx.x	x.xxx	xx.x	B	11.3	0.419	11.3	B	10.9	0.386	- 0.033	10.9	- 0.4	?	xx.x	x.xxx	xx.x
#4 De Anza Boulevard and Alves Drive	?	xx.x	x.xxx	xx.x	C	20.9	0.367	0.6	C	20.4	0.348	- 0.019	0.6	- 0.0	?	xx.x	x.xxx	xx.x
#5 Mary Avenue and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	C-	32.9	0.534	27.7	C-	33.0	0.532	- 0.002	27.8	+ 0.1	?	xx.x	x.xxx	xx.x
#6 N. Stelling Road and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	D	39.6	0.822	38.2	D	39.4	0.817	- 0.005	38.0	- 0.2	?	xx.x	x.xxx	xx.x
#7 Saich Way and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	C+	21.3	0.504	31.7	C+	21.4	0.499	- 0.005	31.9	+ 0.2	?	xx.x	x.xxx	xx.x
#8 Bandlely Drive and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	C	23.9	0.483	21.7	C	23.0	0.479	- 0.004	21.2	- 0.4	?	xx.x	x.xxx	xx.x
#9 De Anza Boulevard and Stevens Creek Boulevard	?	xx.x	x.xxx	xx.x	E	63.5	1.059	84.4	E	62.9	1.056	- 0.003	83.3	- 1.1	?	xx.x	x.xxx	xx.x

Marina Plaza TIA  
DC16-0009  
Background and Background PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background AM

Intersection #1: De Anza Blvd/Mariani Ave

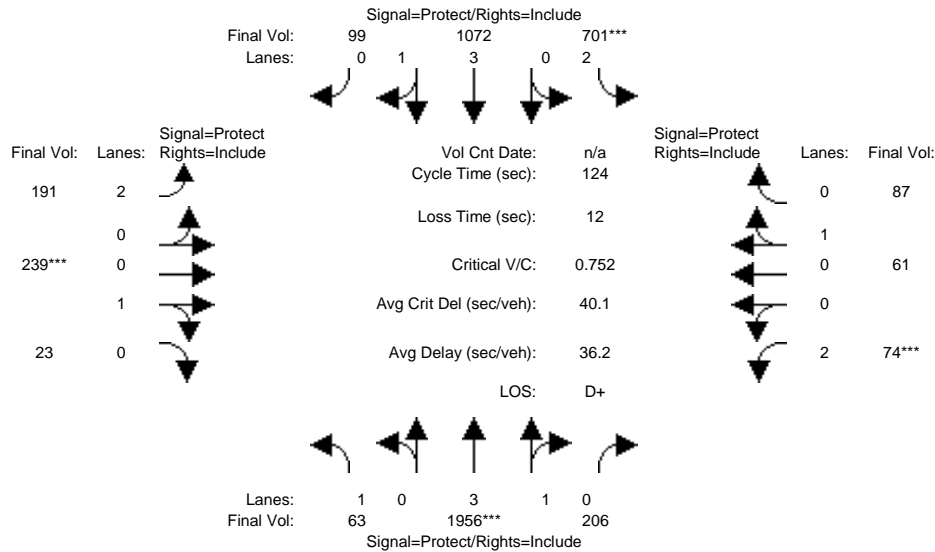

Street Name:	De Anza Blvd						Mariani Ave					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:	North Bound			South Bound			East Bound			West Bound		
Base Vol:	61	1867	201	684	995	97	186	233	22	72	60	85
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	61	1867	201	684	995	97	186	233	22	72	60	85
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	42	0	0	51	0	0	0	0	0	0	0
Initial Fut:	61	1909	201	684	1046	97	186	233	22	72	60	85
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
PHF Volume:	62	1956	206	701	1072	99	191	239	23	74	61	87
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	62	1956	206	701	1072	99	191	239	23	74	61	87
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	63	1956	206	701	1072	99	191	239	23	74	61	87

Saturation Flow Module:	North Bound			South Bound			East Bound			West Bound		
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.83	0.99	0.95	0.83	0.95	0.95	0.83	0.95	0.95
Lanes:	1.00	3.60	0.40	2.00	3.65	0.35	2.00	0.91	0.09	2.00	0.41	0.59
Final Sat.:	1750	6784	714	3150	6862	636	3150	1645	155	3150	745	1055


Capacity Analysis Module:	North Bound			South Bound			East Bound			West Bound		
Vol/Sat:	0.04	0.29	0.29	0.22	0.16	0.16	0.06	0.15	0.15	0.02	0.08	0.08
Crit Moves:	****			****			****			****		
Green Time:	21.7	46.2	46.2	35.6	60.1	60.1	12.8	23.2	23.2	7.0	17.4	17.4
Volume/Cap:	0.20	0.77	0.77	0.77	0.32	0.32	0.59	0.77	0.77	0.41	0.59	0.59
Uniform Del:	43.8	34.3	34.3	40.5	19.5	19.5	53.1	47.9	47.9	56.5	49.9	49.9
IncrementDel:	0.3	1.4	1.4	4.2	0.1	0.1	2.8	10.7	10.7	1.6	3.5	3.5
InitQueueDel:	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Delay/Veh:	44.1	35.7	35.7	44.7	19.6	19.6	55.9	58.6	58.6	58.1	53.4	53.4
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	44.1	35.7	35.7	44.7	19.6	19.6	55.9	58.6	58.6	58.1	53.4	53.4
LOS by Move:	D	D+	D+	D	B-	B-	E+	E+	E+	E+	D-	D-
HCM2kAvgQ:	2	18	18	16	7	7	5	12	12	2	6	6

Note: Queue reported is the number of cars per lane.



Marina Plaza TIA  
DC16-0009  
Background and Background PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PP AM

Intersection #1: De Anza Blvd/Mariani Ave

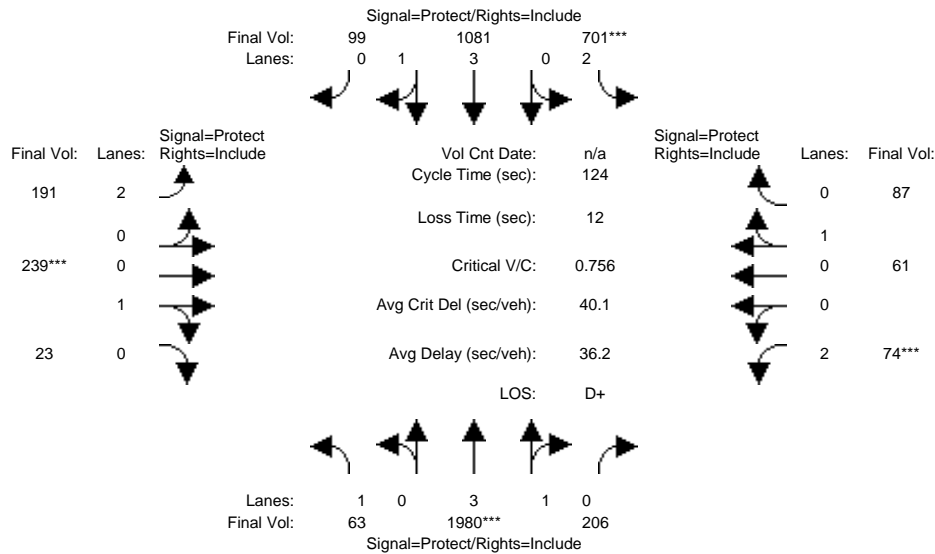

Street Name:	De Anza Blvd						Mariani Ave					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	61	1867	201	684	995	97	186	233	22	72	60	85
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	61	1867	201	684	995	97	186	233	22	72	60	85
Added Vol:	0	23	0	0	9	0	0	0	0	0	0	0
PasserByVol:	0	42	0	0	51	0	0	0	0	0	0	0
Initial Fut:	61	1932	201	684	1055	97	186	233	22	72	60	85
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
PHF Volume:	62	1980	206	701	1081	99	191	239	23	74	61	87
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	62	1980	206	701	1081	99	191	239	23	74	61	87
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	63	1980	206	701	1081	99	191	239	23	74	61	87


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.83	0.99	0.95	0.83	0.95	0.95	0.83	0.95	0.95
Lanes:	1.00	3.61	0.39	2.00	3.65	0.35	2.00	0.91	0.09	2.00	0.41	0.59
Final Sat.:	1750	6792	707	3150	6867	631	3150	1645	155	3150	745	1055

Capacity Analysis Module:												
Vol/Sat:	0.04	0.29	0.29	0.22	0.16	0.16	0.06	0.15	0.15	0.02	0.08	0.08
Crit Moves:	****			****			****			****		
Green Time:	21.6	46.4	46.4	35.4	60.3	60.3	12.7	23.1	23.1	7.0	17.4	17.4
Volume/Cap:	0.20	0.78	0.78	0.78	0.32	0.32	0.59	0.78	0.78	0.41	0.59	0.59
Delay/Veh:	44.2	35.7	35.7	45.0	19.5	19.5	56.0	59.0	59.0	58.1	53.6	53.6
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	44.2	35.7	35.7	45.0	19.5	19.5	56.0	59.0	59.0	58.1	53.6	53.6
LOS by Move:	D	D+	D+	D	B-	B-	E+	E+	E+	E+	D-	D-
HCM2kAvgQ:	2	19	19	16	7	7	5	12	12	2	6	6

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Background and Background PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background AM

Intersection #2: De Anza Blvd/Lazaneo Dr

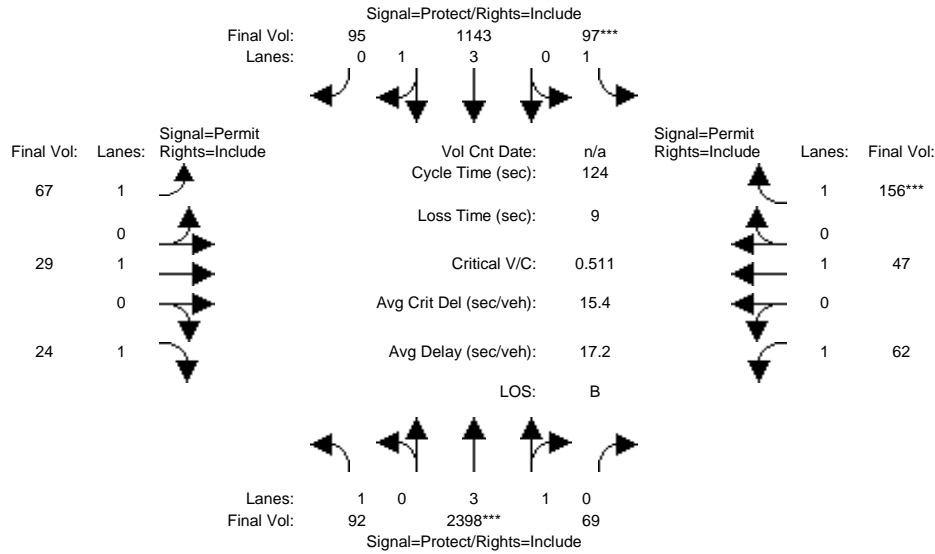

Street Name:	De Anza Blvd						Lazaneo Dr					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	10	10	10	10	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	86	2198	64	91	1017	89	63	27	22	58	44	146
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	86	2198	64	91	1017	89	63	27	22	58	44	146
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	42	0	0	51	0	0	0	0	0	0	0
Initial Fut:	86	2240	64	91	1068	89	63	27	22	58	44	146
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
PHF Volume:	92	2398	69	97	1143	95	67	29	24	62	47	156
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	92	2398	69	97	1143	95	67	29	24	62	47	156
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	92	2398	69	97	1143	95	67	29	24	62	47	156


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.92	0.99	0.95	0.92	1.00	0.92	0.92	1.00	0.92
Lanes:	1.00	3.88	0.12	1.00	3.68	0.32	1.00	1.00	1.00	1.00	1.00	1.00
Final Sat.:	1750	7291	208	1750	6922	577	1750	1900	1750	1750	1900	1750

Capacity Analysis Module:												
Vol/Sat:	0.05	0.33	0.33	0.06	0.17	0.17	0.04	0.02	0.01	0.04	0.02	0.09
Crit Moves:	****			****								
Green Time:	23.8	79.8	79.8	13.5	69.6	69.6	21.7	21.7	21.7	21.7	21.7	21.7
Volume/Cap:	0.27	0.51	0.51	0.51	0.29	0.29	0.22	0.09	0.08	0.20	0.14	0.51
Uniform Del:	42.8	11.7	11.7	52.1	14.3	14.3	43.9	42.9	42.8	43.8	43.3	46.4
IncrcmntDel:	0.4	0.1	0.1	2.3	0.0	0.0	0.4	0.1	0.1	0.3	0.2	1.5
InitQueueDel:	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Delay/Veh:	43.2	11.8	11.8	54.4	14.4	14.4	44.3	43.0	42.9	44.1	43.5	47.8
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	43.2	11.8	11.8	54.4	14.4	14.4	44.3	43.0	42.9	44.1	43.5	47.8
LOS by Move:	D	B+	B+	D-	B	B	D	D	D	D	D	D
HCM2kAvgQ:	3	12	12	4	6	6	2	1	1	2	2	6

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Background and Background PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PP AM

Intersection #2: De Anza Blvd/Lazaneo Dr

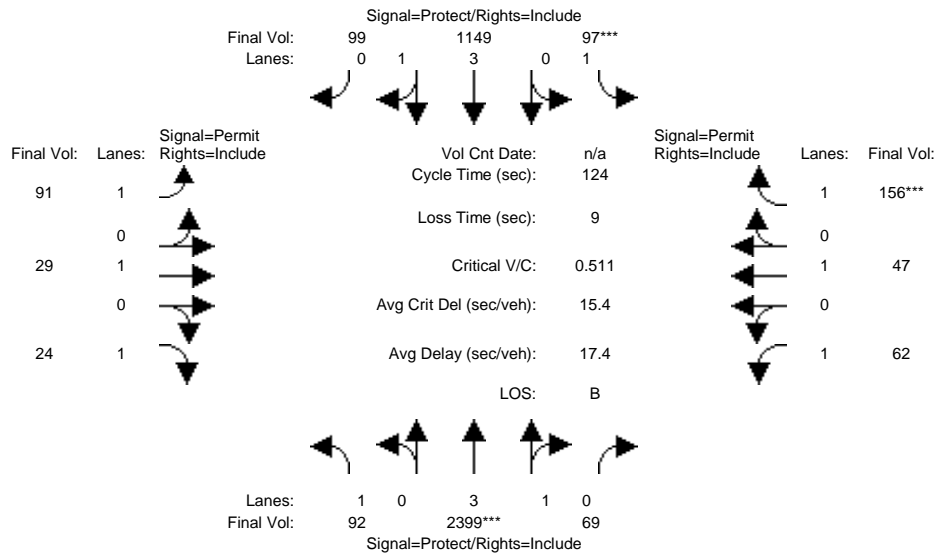

Street Name:	De Anza Blvd						Lazaneo Dr					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R

Min. Green:	7	10	10	7	10	10	10	10	10	10	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:

Base Vol:	86	2198	64	91	1017	89	63	27	22	58	44	146
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	86	2198	64	91	1017	89	63	27	22	58	44	146
Added Vol:	0	1	0	0	5	3	22	0	0	0	0	0
PasserByVol:	0	42	0	0	51	0	0	0	0	0	0	0
Initial Fut:	86	2241	64	91	1073	92	85	27	22	58	44	146
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
PHF Volume:	92	2399	69	97	1149	99	91	29	24	62	47	156
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	92	2399	69	97	1149	99	91	29	24	62	47	156
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	92	2399	69	97	1149	99	91	29	24	62	47	156

Saturation Flow Module:

Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.92	0.99	0.95	0.92	1.00	0.92	0.92	1.00	0.92
Lanes:	1.00	3.88	0.12	1.00	3.67	0.33	1.00	1.00	1.00	1.00	1.00	1.00
Final Sat.:	1750	7291	208	1750	6907	592	1750	1900	1750	1750	1900	1750


Capacity Analysis Module:

Vol/Sat:	0.05	0.33	0.33	0.06	0.17	0.17	0.05	0.02	0.01	0.04	0.02	0.09
Crit Moves:	****			****						****		
Green Time:	23.6	79.8	79.8	13.5	69.7	69.7	21.7	21.7	21.7	21.7	21.7	21.7
Volume/Cap:	0.28	0.51	0.51	0.51	0.30	0.30	0.30	0.09	0.08	0.20	0.14	0.51
Delay/Veh:	43.3	11.8	11.8	54.5	14.3	14.3	45.1	43.0	42.9	44.1	43.5	47.8
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	43.3	11.8	11.8	54.5	14.3	14.3	45.1	43.0	42.9	44.1	43.5	47.8
LOS by Move:	D	B+	B+	D-	B	B	D	D	D	D	D	D
HCM2kAvgQ:	3	12	12	4	6	6	3	1	1	2	2	6

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
 DC16-0009  
 Background and Background PP AM  
 Level Of Service Computation Report  
 2000 HCM 4-Way Stop (Future Volume Alternative)  
 Background AM

Intersection #3: Bandlely Dr/Alves Dr

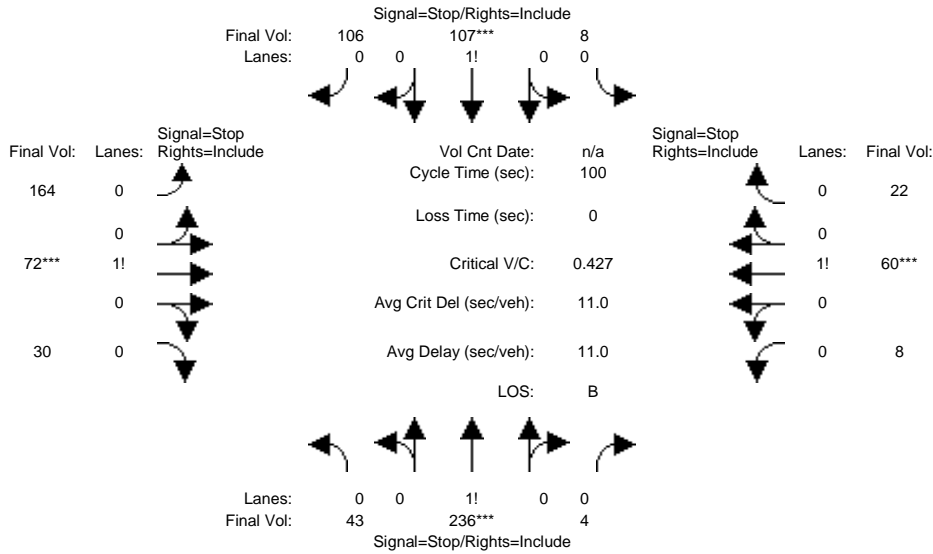

Street Name:	Bandlely Dr						Alves Dr					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R

Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10

Volume Module:												
Base Vol:	38	210	4	7	95	94	146	64	27	7	53	20
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	38	210	4	7	95	94	146	64	27	7	53	20
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	38	210	4	7	95	94	146	64	27	7	53	20
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89
PHF Volume:	43	236	4	8	107	106	164	72	30	8	60	22
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	43	236	4	8	107	106	164	72	30	8	60	22
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	43	236	4	8	107	106	164	72	30	8	60	22

Saturation Flow Module:												
Adjustment:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lanes:	0.15	0.83	0.02	0.04	0.48	0.48	0.62	0.27	0.11	0.09	0.66	0.25
Final Sat.:	100	553	11	24	329	326	392	172	72	52	394	149

Capacity Analysis Module:												
Vol/Sat:	0.43	0.43	0.43	0.32	0.32	0.32	0.42	0.42	0.42	0.15	0.15	0.15
Crit Moves:	****			****			****			****		
Delay/Veh:	11.6	11.6	11.6	10.1	10.1	10.1	11.7	11.7	11.7	9.3	9.3	9.3
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	11.6	11.6	11.6	10.1	10.1	10.1	11.7	11.7	11.7	9.3	9.3	9.3
LOS by Move:	B	B	B	B	B	B	B	B	B	A	A	A
ApproachDel:	11.6			10.1			11.7			9.3		
Delay Adj:	1.00			1.00			1.00			1.00		
ApprAdjDel:	11.6			10.1			11.7			9.3		
LOS by Appr:	B			B			B			A		
AllWayAvgQ:	0.6	0.6	0.6	0.4	0.4	0.4	0.6	0.6	0.6	0.1	0.1	0.1

Note: Queue reported is the number of cars per lane.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
 Intersection #3 Bandlely Dr/Alves Dr  
 \*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Stop Sign			Stop Sign			Stop Sign			Stop Sign		
Lanes:	0	0	1	0	0	1	0	0	0	0	1	0
Initial Vol:	38	210	4	7	95	94	146	64	27	7	53	20
Major Street Volume:							448					
Minor Approach Volume:							237					
Minor Approach Volume Threshold:							434					


SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIA  
DC16-0009  
Background and Background PP AM  
Level Of Service Computation Report  
2000 HCM 4-Way Stop (Future Volume Alternative)  
Background PP AM

Intersection #3: Bandlely Dr/Alves Dr

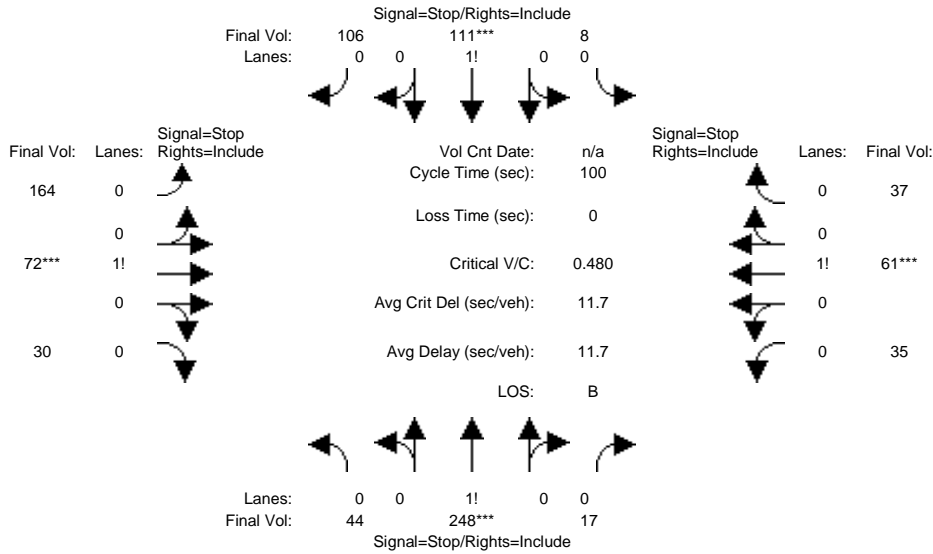

Street Name:	Bandlely Dr						Alves Dr					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R

Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
-------------	---	----	----	---	----	----	---	----	----	---	----	----

Volume Module:

Base Vol:	38	210	4	7	95	94	146	64	27	7	53	20
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	38	210	4	7	95	94	146	64	27	7	53	20
Added Vol:	1	11	11	0	4	0	0	0	0	24	1	13
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	39	221	15	7	99	94	146	64	27	31	54	33
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89	0.89
PHF Volume:	44	248	17	8	111	106	164	72	30	35	61	37
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	44	248	17	8	111	106	164	72	30	35	61	37
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	44	248	17	8	111	106	164	72	30	35	61	37

Saturation Flow Module:

Adjustment:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lanes:	0.14	0.81	0.05	0.03	0.50	0.47	0.62	0.27	0.11	0.26	0.46	0.28
Final Sat.:	91	517	35	23	320	303	376	165	70	152	265	162

Capacity Analysis Module:

Vol/Sat:	0.48	0.48	0.48	0.35	0.35	0.35	0.44	0.44	0.44	0.23	0.23	0.23
Crit Moves:	****			****			****			****		
Delay/Veh:	12.7	12.7	12.7	10.6	10.6	10.6	12.3	12.3	12.3	10.0	10.0	10.0
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	12.7	12.7	12.7	10.6	10.6	10.6	12.3	12.3	12.3	10.0	10.0	10.0
LOS by Move:	B	B	B	B	B	B	B	B	B	B	B	B
ApproachDel:	12.7			10.6			12.3			10.0		
Delay Adj:	1.00			1.00			1.00			1.00		
ApprAdjDel:	12.7			10.6			12.3			10.0		
LOS by Appr:	B			B			B			B		
AllWayAvgQ:	0.8	0.8	0.8	0.4	0.4	0.4	0.6	0.6	0.6	0.2	0.2	0.2

Note: Queue reported is the number of cars per lane.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
Intersection #3 Bandlely Dr/Alves Dr  
\*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Stop Sign			Stop Sign			Stop Sign			Stop Sign		
Lanes:	0	0	1	0	0	1	0	0	0	0	1	0
Initial Vol:	39	221	15	7	99	94	146	64	27	31	54	33
Major Street Volume:	475											
Minor Approach Volume:	237											
Minor Approach Volume Threshold:	418											


SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIA  
 DC16-0009  
 Background and Background PP AM  
 Level Of Service Computation Report  
 2000 HCM Unsignalized (Future Volume Alternative)  
 Background AM

Intersection #4: De Anza Blvd/Alves Dr

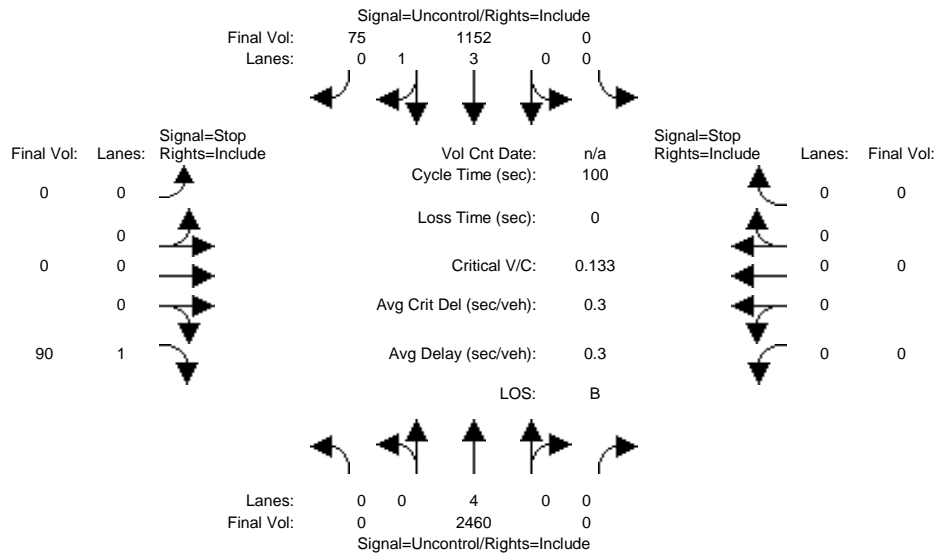

Street Name: De Anza Blvd Alves Dr  
 Approach: North Bound South Bound East Bound West Bound  
 Movement: L - T - R L - T - R L - T - R L - T - R

Volume Module:												
Base Vol:	0	2315	0	0	1053	72	0	0	86	0	0	0
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	2315	0	0	1053	72	0	0	86	0	0	0
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	42	0	0	51	0	0	0	0	0	0	0
Initial Fut:	0	2357	0	0	1104	72	0	0	86	0	0	0
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	0	2460	0	0	1152	75	0	0	90	0	0	0
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
FinalVolume:	0	2460	0	0	1152	75	0	0	90	0	0	0

Critical Gap Module:												
Critical Gp:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	6.9	xxxxx	xxxx	xxxxx
FollowUpTim:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	3.3	xxxxx	xxxx	xxxxx

Capacity Module:												
Cnflct Vol:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	326	xxxx	xxxx	xxxxx
Potent Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	676	xxxx	xxxx	xxxxx
Move Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	676	xxxx	xxxx	xxxxx
Volume/Cap:	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	0.13	xxxx	xxxx	xxxx

Level Of Service Module:												
2Way95thQ:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	0.5	xxxx	xxxx	xxxxx
Control Del:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	11.1	xxxxx	xxxx	xxxxx
LOS by Move:	*	*	*	*	*	*	*	*	B	*	*	*
Movement:	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT		LT - LTR - RT	LT - LTR - RT	
Shared Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx
SharedQueue:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shrd ConDel:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shared LOS:	*	*	*	*	*	*	*	*	*	*	*	*
ApproachDel:	xxxxxxx			xxxxxxx					11.1	xxxxxxx		
ApproachLOS:	*			*					B	*		

Note: Queue reported is the number of cars per lane.

Peak Hour Delay Signal Warrant Report

\*\*\*\*\*  
 Intersection #4 De Anza Blvd/Alves Dr  
 \*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met



Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 2357 0	0 1104 72	0 0 86	0 0 0
ApproachDel:	xxxxxx	xxxxxx	11.1	xxxxxx

Approach[eastbound][lanes=1][control=Stop Sign]  
 Signal Warrant Rule #1: [vehicle-hours=0.3]  
 FAIL - Vehicle-hours less than 4 for one lane approach.  
 Signal Warrant Rule #2: [approach volume=86]  
 FAIL - Approach volume less than 100 for one lane approach.  
 Signal Warrant Rule #3: [approach count=3][total volume=3619]  
 SUCCEED - Total volume greater than or equal to 650 for intersection with less than four approaches.

SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
 Intersection #4 De Anza Blvd/Alves Dr  
 \*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 2357 0	0 1104 72	0 0 86	0 0 0

Major Street Volume: 3533  
 Minor Approach Volume: 86  
 Minor Approach Volume Threshold: -150 [less than minimum of 100]

SIGNAL WARRANT DISCLAIMER


This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIA  
DC16-0009  
Background and Background PP AM

Level Of Service Computation Report  
2000 HCM Unsignalized (Future Volume Alternative)  
Background PP AM

Intersection #4: De Anza Blvd/Alves Dr

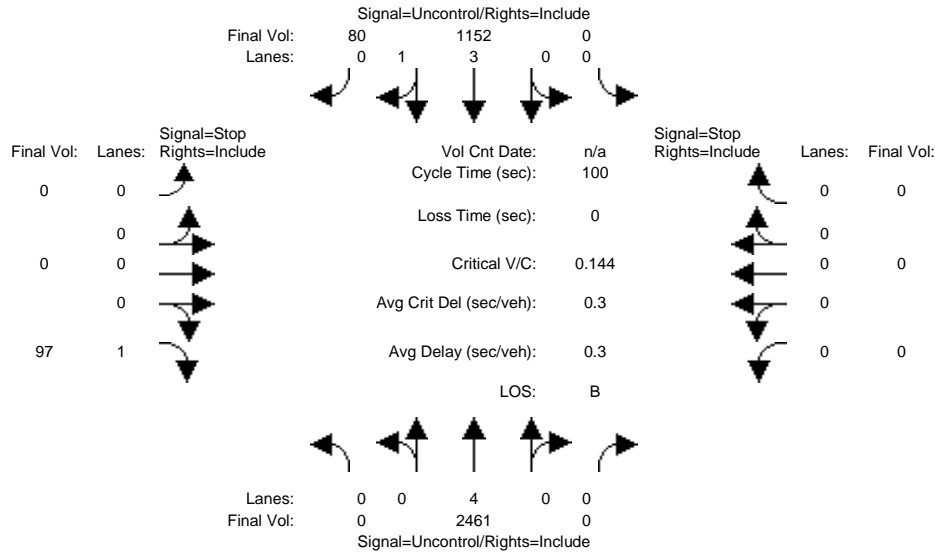

Street Name: De Anza Blvd Alves Dr  
 Approach: North Bound South Bound East Bound West Bound  
 Movement: L - T - R L - T - R L - T - R L - T - R

Volume Module:												
Base Vol:	0	2315	0	0	1053	72	0	0	86	0	0	0
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	2315	0	0	1053	72	0	0	86	0	0	0
Added Vol:	0	1	0	0	0	5	0	0	7	0	0	0
PasserByVol:	0	42	0	0	51	0	0	0	0	0	0	0
Initial Fut:	0	2358	0	0	1104	77	0	0	93	0	0	0
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	0	2461	0	0	1152	80	0	0	97	0	0	0
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
FinalVolume:	0	2461	0	0	1152	80	0	0	97	0	0	0

Critical Gap Module:												
Critical Gp:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	6.9	xxxxx	xxxx	xxxxx
FollowUpTim:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	3.3	xxxxx	xxxx	xxxxx

Capacity Module:												
Cnflct Vol:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	328	xxxx	xxxx	xxxxx
Potent Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	673	xxxx	xxxx	xxxxx
Move Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	673	xxxx	xxxx	xxxxx
Volume/Cap:	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	0.14	xxxx	xxxx	xxxx

Level Of Service Module:												
2Way95thQ:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	0.5	xxxx	xxxx	xxxxx
Control Del:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	11.2	xxxxx	xxxx	xxxxx
LOS by Move:	*	*	*	*	*	*	*	*	B	*	*	*
Movement:	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT		LT - LTR - RT	LT - LTR - RT	
Shared Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx
SharedQueue:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shrd ConDel:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shared LOS:	*	*	*	*	*	*	*	*	*	*	*	*
ApproachDel:	xxxxxxx			xxxxxxx					11.2	xxxxxxx		
ApproachLOS:	*			*					B	*		

Note: Queue reported is the number of cars per lane.

Peak Hour Delay Signal Warrant Report

\*\*\*\*\*  
Intersection #4 De Anza Blvd/Alves Dr  
\*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 2358 0	0 1104 77	0 0 93	0 0 0
ApproachDel:	xxxxxx	xxxxxx	11.2	xxxxxx

Approach[eastbound][lanes=1][control=Stop Sign]  
 Signal Warrant Rule #1: [vehicle-hours=0.3]  
 FAIL - Vehicle-hours less than 4 for one lane approach.  
 Signal Warrant Rule #2: [approach volume=93]  
 FAIL - Approach volume less than 100 for one lane approach.  
 Signal Warrant Rule #3: [approach count=3][total volume=3632]  
 SUCCEED - Total volume greater than or equal to 650 for intersection with less than four approaches.

SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
 Intersection #4 De Anza Blvd/Alves Dr  
 \*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 2358 0	0 1104 77	0 0 93	0 0 0

Major Street Volume: 3539  
 Minor Approach Volume: 93  
 Minor Approach Volume Threshold: -151 [less than minimum of 100]


SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIA  
DC16-0009  
Background and Background PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background AM

Intersection #5: Mary Ave/Stevens Creek Blvd

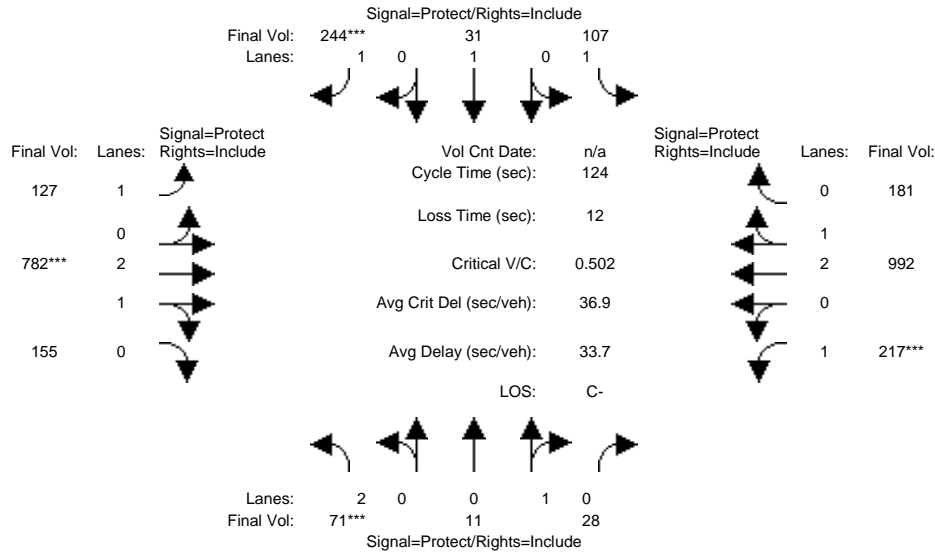

Street Name:	Mary Ave						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	64	10	25	97	28	221	115	662	140	196	865	164
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	64	10	25	97	28	221	115	662	140	196	865	164
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	46	0	0	33	0
Initial Fut:	64	10	25	97	28	221	115	708	140	196	898	164
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91
PHF Volume:	71	11	28	107	31	244	127	782	155	217	992	181
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	71	11	28	107	31	244	127	782	155	217	992	181
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	71	11	28	107	31	244	127	782	155	217	992	181


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	0.95	0.95	0.92	1.00	0.92	0.92	0.99	0.95	0.92	0.99	0.95
Lanes:	2.00	0.29	0.71	1.00	1.00	1.00	1.00	2.49	0.51	1.00	2.52	0.48
Final Sat.:	3150	514	1286	1750	1900	1750	1750	4674	924	1750	4734	865

Capacity Analysis Module:												
Vol/Sat:	0.02	0.02	0.02	0.06	0.02	0.14	0.07	0.17	0.17	0.12	0.21	0.21
Crit Moves:	****					****		****		****		
Green Time:	7.0	23.3	23.3	17.7	34.0	34.0	18.3	40.8	40.8	30.2	52.7	52.7
Volume/Cap:	0.40	0.11	0.11	0.43	0.06	0.51	0.49	0.51	0.51	0.51	0.49	0.49
Uniform Del:	56.5	41.8	41.8	48.5	33.2	37.9	48.6	33.5	33.5	40.5	25.9	25.9
IncrcmntDel:	1.5	0.2	0.2	1.2	0.0	0.9	1.5	0.2	0.2	1.0	0.2	0.2
InitQueueDel:	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Delay/Veh:	57.9	41.9	41.9	49.7	33.2	38.8	50.1	33.8	33.8	41.5	26.1	26.1
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	57.9	41.9	41.9	49.7	33.2	38.8	50.1	33.8	33.8	41.5	26.1	26.1
LOS by Move:	E+	D	D	D	C-	D+	D	C-	C-	D	C	C
HCM2kAvgQ:	2	1	1	4	1	9	5	10	10	7	10	10

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Background and Background PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PP AM

Intersection #5: Mary Ave/Stevens Creek Blvd

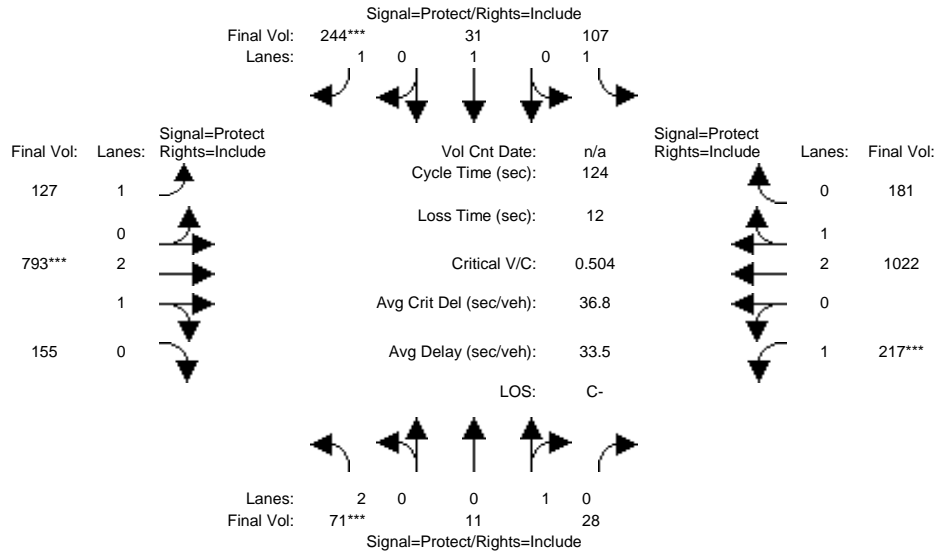

Street Name:	Mary Ave						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	64	10	25	97	28	221	115	662	140	196	865	164
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	64	10	25	97	28	221	115	662	140	196	865	164
Added Vol:	0	0	0	0	0	0	0	10	0	0	27	0
PasserByVol:	0	0	0	0	0	0	0	46	0	0	33	0
Initial Fut:	64	10	25	97	28	221	115	718	140	196	925	164
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91
PHF Volume:	71	11	28	107	31	244	127	793	155	217	1022	181
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	71	11	28	107	31	244	127	793	155	217	1022	181
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	71	11	28	107	31	244	127	793	155	217	1022	181

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	0.95	0.95	0.92	1.00	0.92	0.92	0.99	0.95	0.92	0.99	0.95
Lanes:	2.00	0.29	0.71	1.00	1.00	1.00	1.00	2.49	0.51	1.00	2.53	0.47
Final Sat.:	3150	514	1286	1750	1900	1750	1750	4685	914	1750	4756	843


Capacity Analysis Module:												
Vol/Sat:	0.02	0.02	0.02	0.06	0.02	0.14	0.07	0.17	0.17	0.12	0.21	0.21
Crit Moves:	****					****		****		****		
Green Time:	7.0	23.2	23.2	17.6	33.9	33.9	18.0	41.1	41.1	30.0	53.2	53.2
Volume/Cap:	0.40	0.11	0.11	0.43	0.06	0.51	0.50	0.51	0.51	0.51	0.50	0.50
Delay/Veh:	57.9	42.0	42.0	49.8	33.3	39.0	50.5	33.6	33.6	41.7	25.9	25.9
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	57.9	42.0	42.0	49.8	33.3	39.0	50.5	33.6	33.6	41.7	25.9	25.9
LOS by Move:	E+	D	D	D	C-	D	D	C-	C-	D	C	C
HCM2kAvgQ:	2	1	1	4	1	9	5	10	10	7	11	11

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Background and Background PP AM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background AM

Intersection #6: Stevens Creek Blvd/Stelling Rd 1613-217 [CMP 2010]

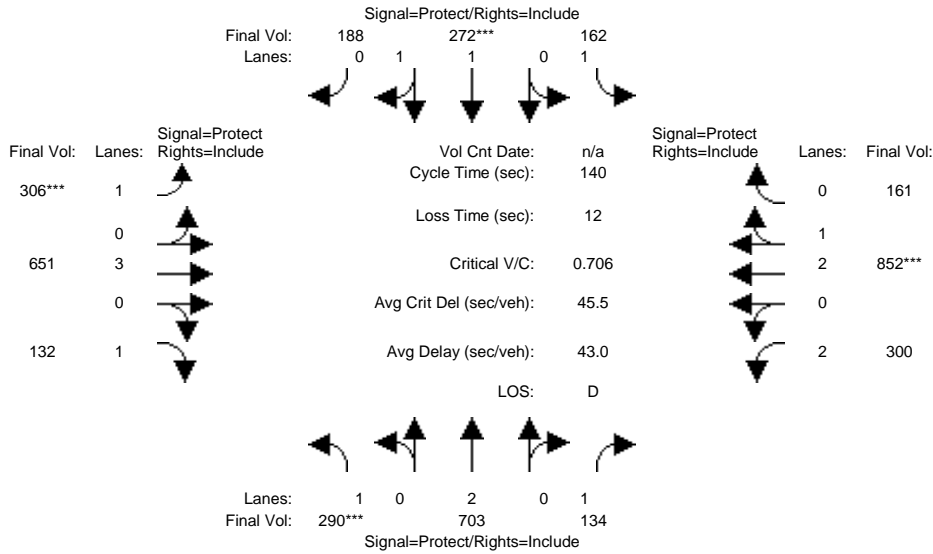

Street Name:	Stelling Road						Stevens Creek Boulevard					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
	North Bound			South Bound			East Bound			West Bound		
Base Vol:	267	634	119	149	249	167	281	554	122	277	753	148
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	267	634	119	149	249	167	281	554	122	277	753	148
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	14	5	0	2	6	1	46	0	0	33	0
Initial Fut:	267	648	124	149	251	173	282	600	122	277	786	148
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
PHF Volume:	290	703	134	162	272	188	306	651	132	300	852	161
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	290	703	134	162	272	188	306	651	132	300	852	161
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	290	703	134	162	272	188	306	651	132	300	852	161

Saturation Flow Module:												
	North Bound			South Bound			East Bound			West Bound		
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	1.00	0.92	0.92	0.99	0.95	0.92	1.00	0.92	0.83	0.99	0.95
Lanes:	1.00	2.00	1.00	1.00	1.16	0.84	1.00	3.00	1.00	2.00	2.51	0.49
Final Sat.:	1750	3800	1750	1750	2189	1509	1750	5700	1750	3150	4711	887


Capacity Analysis Module:												
	North Bound			South Bound			East Bound			West Bound		
Vol/Sat:	0.17	0.18	0.08	0.09	0.12	0.12	0.17	0.11	0.08	0.10	0.18	0.18
Crit Moves:	****				****		****				****	
Green Time:	32.8	38.3	38.3	19.1	24.7	24.7	34.7	38.4	38.4	32.1	35.9	35.9
Volume/Cap:	0.71	0.68	0.28	0.68	0.71	0.71	0.71	0.42	0.28	0.42	0.71	0.71
Uniform Del:	49.2	45.3	40.0	57.5	54.3	54.3	48.0	41.6	39.9	46.0	47.3	47.3
IncrcmntDel:	5.5	1.8	0.3	7.5	3.5	3.5	5.3	0.2	0.3	0.4	1.6	1.6
InitQueueDel:	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	0.78	0.75	0.75	0.80	0.77	0.77
Delay/Veh:	54.7	47.1	40.3	64.9	57.8	57.8	42.8	31.3	30.1	37.2	38.0	38.0
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	54.7	47.1	40.3	64.9	57.8	57.8	42.8	31.3	30.1	37.2	38.0	38.0
LOS by Move:	D-	D	D	E	E+	E+	D	C	C	D+	D+	D+
HCM2kAvgQ:	13	14	5	8	11	11	12	6	4	6	12	12

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Background and Background PP AM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PP AM

Intersection #6: Stevens Creek Blvd/Stelling Rd 1613-217 [CMP 2010]

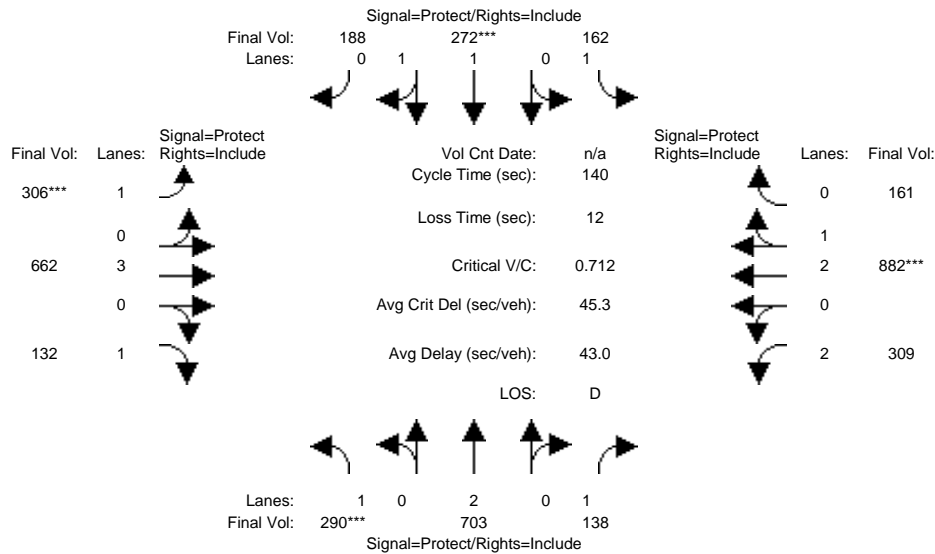

Street Name:	Stelling Road						Stevens Creek Boulevard					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	267	634	119	149	249	167	281	554	122	277	753	148
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	267	634	119	149	249	167	281	554	122	277	753	148
Added Vol:	0	0	3	0	0	0	0	10	0	8	27	0
PasserByVol:	0	14	5	0	2	6	1	46	0	0	33	0
Initial Fut:	267	648	127	149	251	173	282	610	122	285	813	148
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
PHF Volume:	290	703	138	162	272	188	306	662	132	309	882	161
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	290	703	138	162	272	188	306	662	132	309	882	161
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	290	703	138	162	272	188	306	662	132	309	882	161


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	1.00	0.92	0.92	0.99	0.95	0.92	1.00	0.92	0.83	0.99	0.95
Lanes:	1.00	2.00	1.00	1.00	1.16	0.84	1.00	3.00	1.00	2.00	2.52	0.48
Final Sat.:	1750	3800	1750	1750	2189	1509	1750	5700	1750	3150	4736	862

Capacity Analysis Module:												
Vol/Sat:	0.17	0.18	0.08	0.09	0.12	0.12	0.17	0.12	0.08	0.10	0.19	0.19
Crit Moves:	***				***		***				***	
Green Time:	32.5	38.0	38.0	19.0	24.5	24.5	34.4	38.5	38.5	32.5	36.6	36.6
Volume/Cap:	0.71	0.68	0.29	0.68	0.71	0.71	0.71	0.42	0.28	0.42	0.71	0.71
Delay/Veh:	55.2	47.4	40.7	65.5	58.2	58.2	43.3	31.3	30.1	36.9	37.5	37.5
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	55.2	47.4	40.7	65.5	58.2	58.2	43.3	31.3	30.1	36.9	37.5	37.5
LOS by Move:	E+	D	D	E	E+	E+	D	C	C	D+	D+	D+
HCM2kAvgQ:	13	14	5	8	11	11	12	6	4	6	12	12

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Background and Background PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background AM

**Intersection #7: Saich Way/Stevens Creek Blvd**

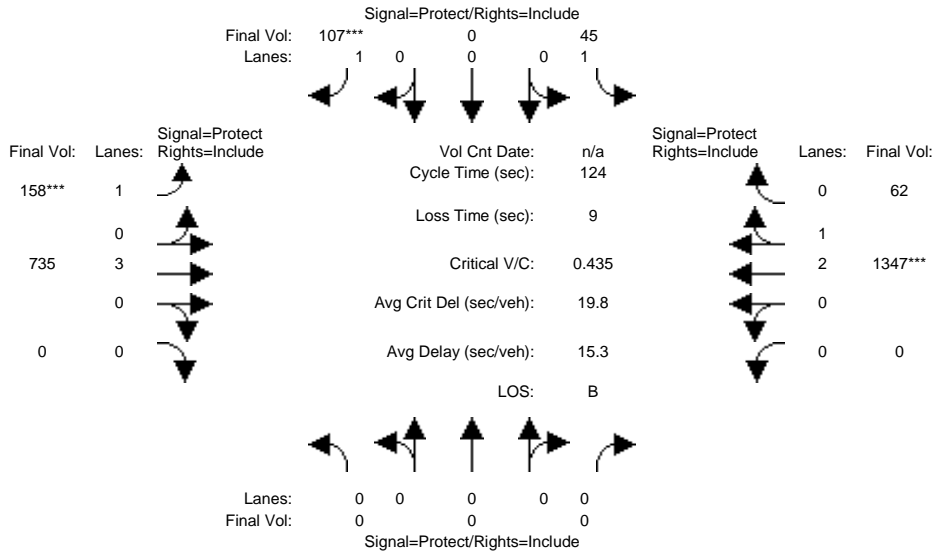

Street Name:	Saich Way						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	0	0	0	41	0	98	145	628	0	0	1202	57
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	0	0	41	0	98	145	628	0	0	1202	57
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	46	0	0	33	0
Initial Fut:	0	0	0	41	0	98	145	674	0	0	1235	57
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
PHF Volume:	0	0	0	45	0	107	158	735	0	0	1347	62
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	0	0	0	45	0	107	158	735	0	0	1347	62
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	0	0	0	45	0	107	158	735	0	0	1347	62

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	1.00	0.92	0.92	1.00	0.92	0.92	1.00	0.92	0.92	0.98	0.95
Lanes:	0.00	0.00	0.00	1.00	0.00	1.00	1.00	3.00	0.00	0.00	2.86	0.14
Final Sat.:	0	0	0	1750	0	1750	1750	5700	0	0	5353	247

Capacity Analysis Module:												
Vol/Sat:	0.00	0.00	0.00	0.03	0.00	0.06	0.09	0.13	0.00	0.00	0.25	0.25
Crit Moves:						****	****				****	
Green Time:	0.0	0.0	0.0	17.4	0.0	17.4	25.8	97.6	0.0	0.0	71.8	71.8
Volume/Cap:	0.00	0.00	0.00	0.18	0.00	0.43	0.43	0.16	0.00	0.00	0.43	0.43
Uniform Del:	0.0	0.0	0.0	47.0	0.0	48.8	42.8	3.2	0.0	0.0	14.7	14.7
IncrcmntDel:	0.0	0.0	0.0	0.4	0.0	1.2	0.8	0.0	0.0	0.0	0.1	0.1
InitQueueDel:	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Delay Adj:	0.00	0.00	0.00	1.00	0.00	1.00	1.00	1.00	0.00	0.00	1.00	1.00
Delay/Veh:	0.0	0.0	0.0	47.4	0.0	50.0	43.6	3.2	0.0	0.0	14.8	14.8
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	0.0	0.0	0.0	47.4	0.0	50.0	43.6	3.2	0.0	0.0	14.8	14.8
LOS by Move:	A	A	A	D	A	D	D	A	A	A	B	B
HCM2kAvgQ:	0	0	0	2	0	4	5	2	0	0	10	10


Note: Queue reported is the number of cars per lane.





Marina Plaza TIA  
DC16-0009  
Background and Background PP AM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background AM

Intersection #8: Bandlely Dr/Stevens Creek Blvd

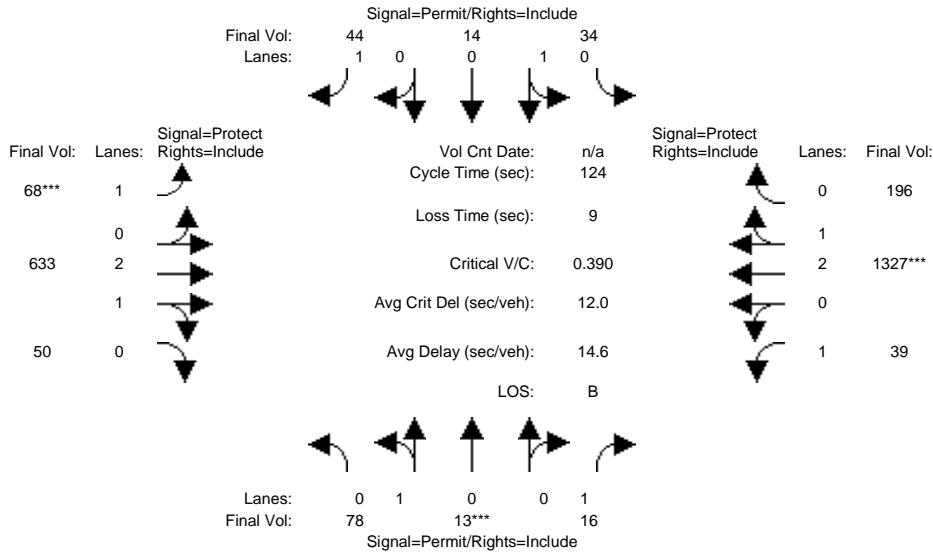

Street Name:	Bandlely Dr						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	10	10	10	10	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	74	12	15	32	13	42	64	552	47	37	1220	185
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	74	12	15	32	13	42	64	552	47	37	1220	185
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	46	0	0	33	0
Initial Fut:	74	12	15	32	13	42	64	598	47	37	1253	185
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
PHF Volume:	78	13	16	34	14	44	68	633	50	39	1327	196
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	78	13	16	34	14	44	68	633	50	39	1327	196
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	78	13	16	34	14	44	68	633	50	39	1327	196

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.95	0.95	0.92	0.95	0.95	0.92	0.92	0.99	0.95	0.92	0.99	0.95
Lanes:	0.86	0.14	1.00	0.71	0.29	1.00	1.00	2.77	0.23	1.00	2.60	0.40
Final Sat.:	1549	251	1750	1280	520	1750	1750	5191	408	1750	4879	720


Capacity Analysis Module:												
Vol/Sat:	0.05	0.05	0.01	0.03	0.03	0.03	0.04	0.12	0.12	0.02	0.27	0.27
Crit Moves:	****						****			****		
Green Time:	16.1	16.1	16.1	16.1	16.1	16.1	12.3	67.6	67.6	31.3	86.6	86.6
Volume/Cap:	0.39	0.39	0.07	0.20	0.20	0.20	0.39	0.22	0.22	0.09	0.39	0.39
Uniform Del:	49.4	49.4	47.4	48.2	48.2	48.2	52.3	14.6	14.6	35.5	7.8	7.8
IncrcmntDel:	1.1	1.1	0.1	0.4	0.4	0.4	1.4	0.0	0.0	0.1	0.1	0.1
InitQueueDel:	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Delay/Veh:	50.5	50.5	47.5	48.7	48.7	48.6	53.8	14.6	14.6	35.5	7.8	7.8
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	50.5	50.5	47.5	48.7	48.7	48.6	53.8	14.6	14.6	35.5	7.8	7.8
LOS by Move:	D	D	D	D	D	D	D-	B	B	D+	A	A
HCM2kAvgQ:	4	4	1	2	2	2	3	4	4	1	8	8

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Background and Background PP AM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PP AM

Intersection #8: Bandlely Dr/Stevens Creek Blvd

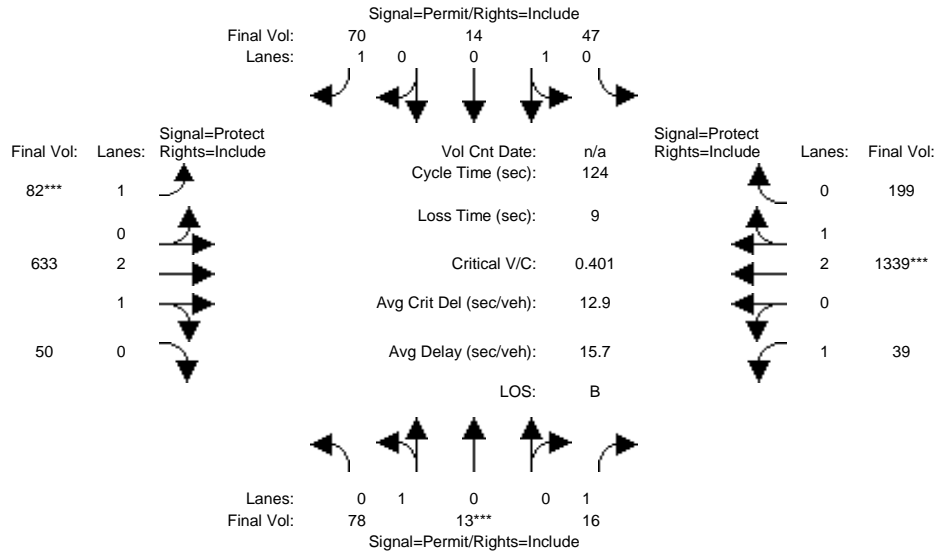

Street Name:	Bandlely Dr						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	10	10	10	10	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	74	12	15	32	13	42	64	552	47	37	1220	185
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	74	12	15	32	13	42	64	552	47	37	1220	185
Added Vol:	0	0	0	12	0	24	13	0	0	0	11	3
PasserByVol:	0	0	0	0	0	0	0	46	0	0	33	0
Initial Fut:	74	12	15	44	13	66	77	598	47	37	1264	188
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
PHF Volume:	78	13	16	47	14	70	82	633	50	39	1339	199
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	78	13	16	47	14	70	82	633	50	39	1339	199
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	78	13	16	47	14	70	82	633	50	39	1339	199

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.95	0.95	0.92	0.95	0.95	0.92	0.92	0.99	0.95	0.92	0.99	0.95
Lanes:	0.86	0.14	1.00	0.77	0.23	1.00	1.00	2.77	0.23	1.00	2.60	0.40
Final Sat.:	1549	251	1750	1389	411	1750	1750	5191	408	1750	4874	725


Capacity Analysis Module:												
Vol/Sat:	0.05	0.05	0.01	0.03	0.03	0.04	0.05	0.12	0.12	0.02	0.27	0.27
Crit Moves:	****						****			****		
Green Time:	15.6	15.6	15.6	15.6	15.6	15.6	14.4	67.9	67.9	31.4	84.9	84.9
Volume/Cap:	0.40	0.40	0.07	0.27	0.27	0.32	0.40	0.22	0.22	0.09	0.40	0.40
Delay/Veh:	51.0	51.0	47.9	49.6	49.6	50.1	52.1	14.5	14.5	35.4	8.6	8.6
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	51.0	51.0	47.9	49.6	49.6	50.1	52.1	14.5	14.5	35.4	8.6	8.6
LOS by Move:	D-	D-	D	D	D	D	D-	B	B	D+	A	A
HCM2kAvgQ:	4	4	1	2	2	3	3	4	4	1	8	8

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Background and Background PP AM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background AM

Intersection #9: De Anza Blvd/Stevens Creek Blvd 1638-211 [CMP 2010]

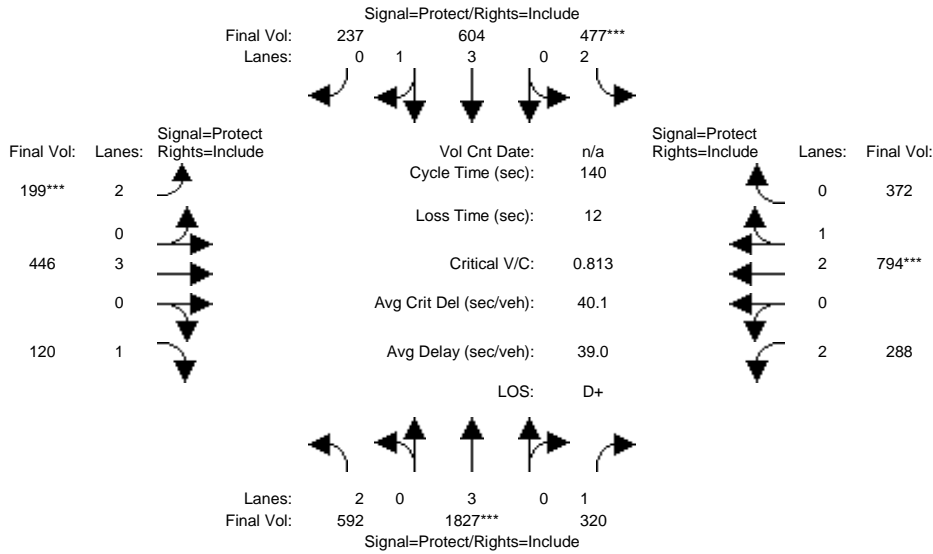

Street Name:	De Anza Boulevard						Stevens Creek Boulevard					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0

Volume Module:												
Base Vol:	564	1728	195	404	574	226	189	379	114	248	723	323
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	564	1728	195	404	574	226	189	379	114	248	723	323
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	11	110	50	1	0	0	46	0	26	33	31
Initial Fut:	564	1739	305	454	575	226	189	425	114	274	756	354
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
PHF Volume:	592	1827	320	477	604	237	199	446	120	288	794	372
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	592	1827	320	477	604	237	199	446	120	288	794	372
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	592	1827	320	477	604	237	199	446	120	288	794	372

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	1.00	0.92	0.83	1.00	0.92	0.83	1.00	0.92	0.83	1.00	0.95
Lanes:	2.00	3.00	1.00	2.00	3.00	1.00	2.00	3.00	1.00	2.00	2.01	0.99
Final Sat.:	3150	5700	1750	3150	5700	1750	3150	5700	1750	3150	3812	1785


Capacity Analysis Module:												
Vol/Sat:	0.19	0.32	0.18	0.15	0.11	0.14	0.06	0.08	0.07	0.09	0.21	0.21
Crit Moves:	****			****			****			****		
Green Time:	47.2	55.2	55.2	26.1	34.1	34.1	10.9	21.6	21.6	25.2	35.9	35.9
Volume/Cap:	0.56	0.81	0.46	0.81	0.44	0.56	0.81	0.51	0.44	0.51	0.81	0.81
Uniform Del:	37.9	37.8	31.4	54.6	44.8	46.4	63.6	54.3	53.8	51.8	48.9	48.9
IncrcmntDel:	0.7	2.4	0.5	8.5	0.2	0.5	18.4	0.5	1.2	0.8	3.7	3.7
InitQueueDel:	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Delay Adj:	0.66	0.57	0.57	0.85	0.79	0.79	1.00	1.00	1.00	1.00	1.00	1.00
Delay/Veh:	25.7	23.8	18.3	54.8	35.4	36.9	82.0	54.8	54.9	52.6	52.6	52.6
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	25.7	23.8	18.3	54.8	35.4	36.9	82.0	54.8	54.9	52.6	52.6	52.6
LOS by Move:	C	C	B-	D-	D+	D+	F	D-	D-	D-	D-	D-
HCM2kAvgQ:	10	21	8	13	6	9	7	6	5	7	17	17

Note: Queue reported is the number of cars per lane.

Marina Plaza TIA  
DC16-0009  
Background and Background PP AM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PP AM

Intersection #9: De Anza Blvd/Stevens Creek Blvd 1638-211 [CMP 2010]

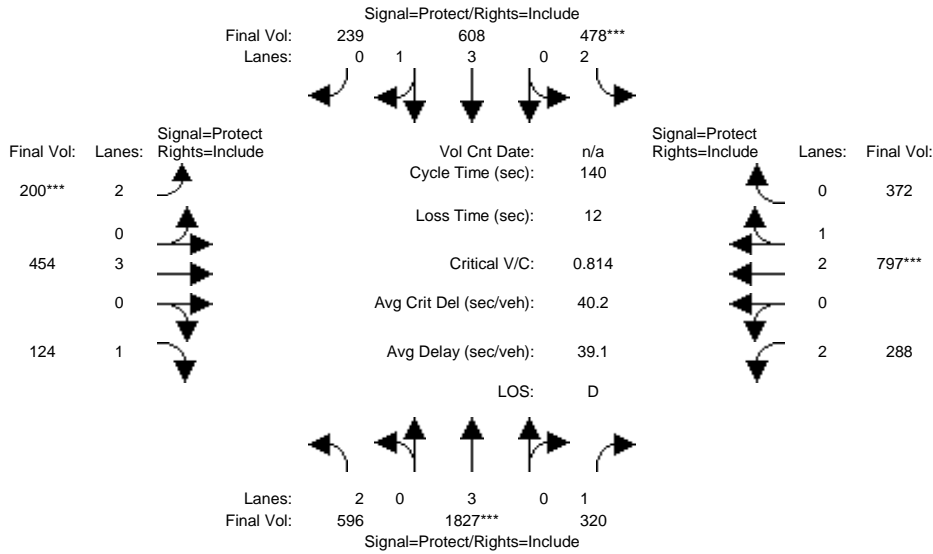

Street Name:	De Anza Boulevard						Stevens Creek Boulevard					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R

Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0

Volume Module:

Base Vol:	564	1728	195	404	574	226	189	379	114	248	723	323
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	564	1728	195	404	574	226	189	379	114	248	723	323
Added Vol:	3	0	0	1	4	2	1	7	4	0	3	0
PasserByVol:	0	11	110	50	1	0	0	46	0	26	33	31
Initial Fut:	567	1739	305	455	579	228	190	432	118	274	759	354
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
PHF Volume:	596	1827	320	478	608	239	200	454	124	288	797	372
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	596	1827	320	478	608	239	200	454	124	288	797	372
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	596	1827	320	478	608	239	200	454	124	288	797	372

Saturation Flow Module:

Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	1.00	0.92	0.83	1.00	0.92	0.83	1.00	0.92	0.83	1.00	0.95
Lanes:	2.00	3.00	1.00	2.00	3.00	1.00	2.00	3.00	1.00	2.00	2.01	0.99
Final Sat.:	3150	5700	1750	3150	5700	1750	3150	5700	1750	3150	3817	1780


Capacity Analysis Module:

Vol/Sat:	0.19	0.32	0.18	0.15	0.11	0.14	0.06	0.08	0.07	0.09	0.21	0.21
Crit Moves:	****			****			****			****		
Green Time:	47.1	55.1	55.1	26.1	34.1	34.1	10.9	21.8	21.8	25.0	35.9	35.9
Volume/Cap:	0.56	0.81	0.47	0.81	0.44	0.56	0.81	0.51	0.45	0.51	0.81	0.81
Delay/Veh:	25.9	23.9	18.4	54.9	35.4	36.9	82.1	54.7	54.9	52.8	52.6	52.6
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	25.9	23.9	18.4	54.9	35.4	36.9	82.1	54.7	54.9	52.8	52.6	52.6
LOS by Move:	C	C	B-	D-	D+	D+	F	D-	D-	D-	D-	D-
HCM2kAvgQ:	10	21	8	14	6	9	7	6	5	7	17	17

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PM

Intersection #1: De Anza Blvd/Mariani Ave

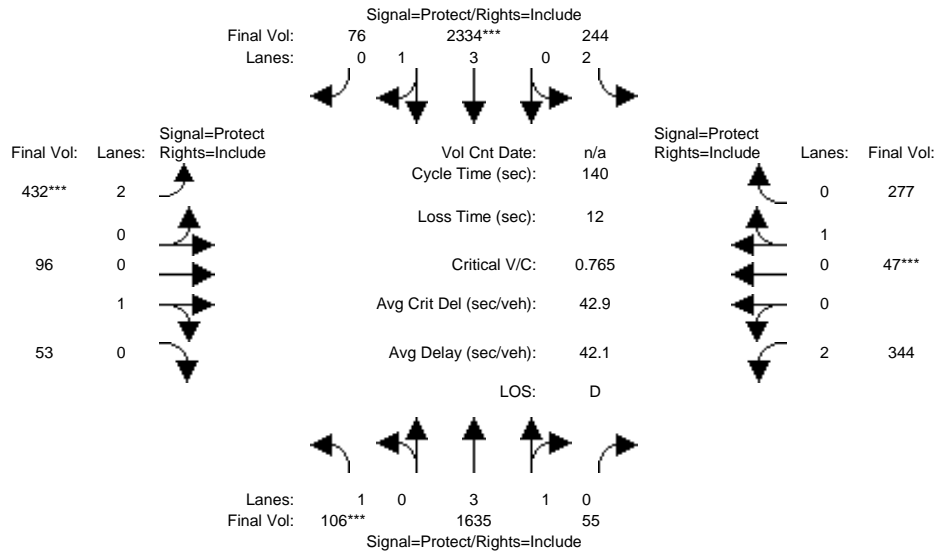

Street Name:	De Anza Blvd						Mariani Ave					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	100	1479	52	229	2134	71	406	90	50	323	44	260
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	100	1479	52	229	2134	71	406	90	50	323	44	260
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	56	0	0	58	0	0	0	0	0	0	0
Initial Fut:	100	1535	52	229	2192	71	406	90	50	323	44	260
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
PHF Volume:	106	1635	55	244	2334	76	432	96	53	344	47	277
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	106	1635	55	244	2334	76	432	96	53	344	47	277
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	106	1635	55	244	2334	76	432	96	53	344	47	277


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.83	0.99	0.95	0.83	0.95	0.95	0.83	0.95	0.95
Lanes:	1.00	3.86	0.14	2.00	3.87	0.13	2.00	0.64	0.36	2.00	0.14	0.86
Final Sat.:	1750	7254	246	3150	7264	235	3150	1157	643	3150	261	1539

Capacity Analysis Module:												
Vol/Sat:	0.06	0.23	0.23	0.08	0.32	0.32	0.14	0.08	0.08	0.11	0.18	0.18
Crit Moves:	****			****			****			****		
Green Time:	11.1	52.1	52.1	17.9	58.8	58.8	25.1	25.0	25.0	33.0	32.9	32.9
Volume/Cap:	0.76	0.61	0.61	0.61	0.76	0.76	0.76	0.46	0.46	0.46	0.76	0.76
Uniform Del:	63.1	35.6	35.6	57.7	34.7	34.7	54.6	51.5	51.5	45.9	49.9	49.9
IncrcmntDel:	22.0	0.4	0.4	2.6	1.2	1.2	6.2	1.1	1.1	0.5	8.1	8.1
InitQueuDel:	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Delay/Veh:	85.1	36.0	36.0	60.4	35.8	35.8	60.8	52.5	52.5	46.4	58.0	58.0
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	85.1	36.0	36.0	60.4	35.8	35.8	60.8	52.5	52.5	46.4	58.0	58.0
LOS by Move:	F	D+	D+	E	D+	D+	E	D-	D-	D	E+	E+
HCM2kAvgQ:	5	15	15	7	23	23	12	6	6	8	15	15

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PP PM

Intersection #1: De Anza Blvd/Mariani Ave

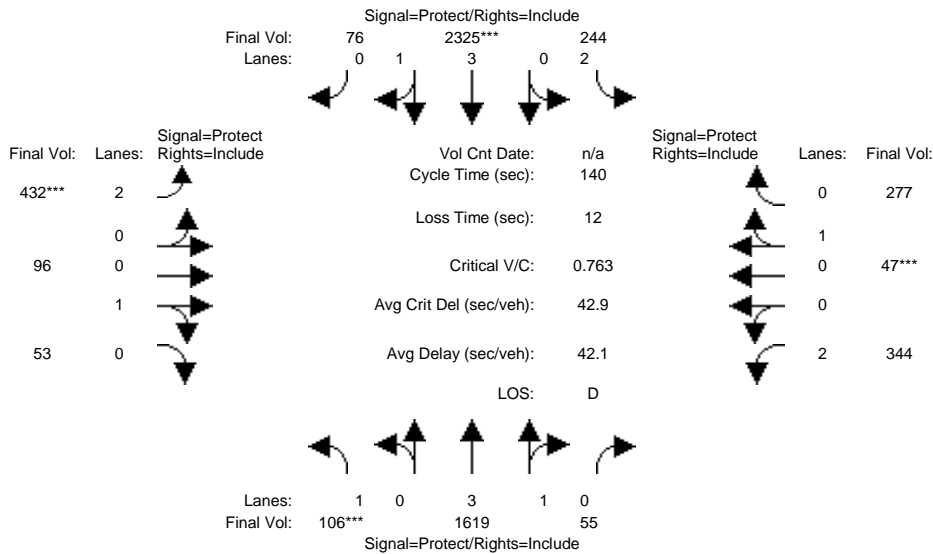

Street Name:	De Anza Blvd						Mariani Ave					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	100	1479	52	229	2134	71	406	90	50	323	44	260
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	100	1479	52	229	2134	71	406	90	50	323	44	260
Added Vol:	0	-15	0	0	-9	0	0	0	0	0	0	0
PasserByVol:	0	56	0	0	58	0	0	0	0	0	0	0
Initial Fut:	100	1520	52	229	2183	71	406	90	50	323	44	260
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
PHF Volume:	106	1619	55	244	2325	76	432	96	53	344	47	277
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	106	1619	55	244	2325	76	432	96	53	344	47	277
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	106	1619	55	244	2325	76	432	96	53	344	47	277

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.83	0.99	0.95	0.83	0.95	0.95	0.83	0.95	0.95
Lanes:	1.00	3.86	0.14	2.00	3.87	0.13	2.00	0.64	0.36	2.00	0.14	0.86
Final Sat.:	1750	7251	248	3150	7263	236	3150	1157	643	3150	261	1539

Capacity Analysis Module:												
Vol/Sat:	0.06	0.22	0.22	0.08	0.32	0.32	0.14	0.08	0.08	0.11	0.18	0.18
Crit Moves:	***			****			****			****		
Green Time:	11.2	51.9	51.9	18.0	58.7	58.7	25.2	25.1	25.1	33.1	33.0	33.0
Volume/Cap:	0.76	0.60	0.60	0.60	0.76	0.76	0.76	0.46	0.46	0.46	0.76	0.76
Delay/Veh:	84.9	36.1	36.1	60.2	35.9	35.9	60.7	52.5	52.5	46.3	57.9	57.9
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	84.9	36.1	36.1	60.2	35.9	35.9	60.7	52.5	52.5	46.3	57.9	57.9
LOS by Move:	F	D+	D+	E	D+	D+	E	D-	D-	D	E+	E+
HCM2kAvgQ:	5	14	14	7	23	23	12	6	6	8	15	15

Note: Queue reported is the number of cars per lane.









Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Stop Sign			Stop Sign			Stop Sign			Stop Sign		
Lanes:	0	0	1!	0	0	0	0	0	1!	0	0	0
Initial Vol:	65	175	17	35	122	91	120	69	47	26	81	34
Major Street Volume:	505											
Minor Approach Volume:	236											
Minor Approach Volume Threshold:	402											


SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM  
Level Of Service Computation Report  
2000 HCM 4-Way Stop (Future Volume Alternative)  
Background PP PM

Intersection #3: Bandlely Dr/Alves Dr

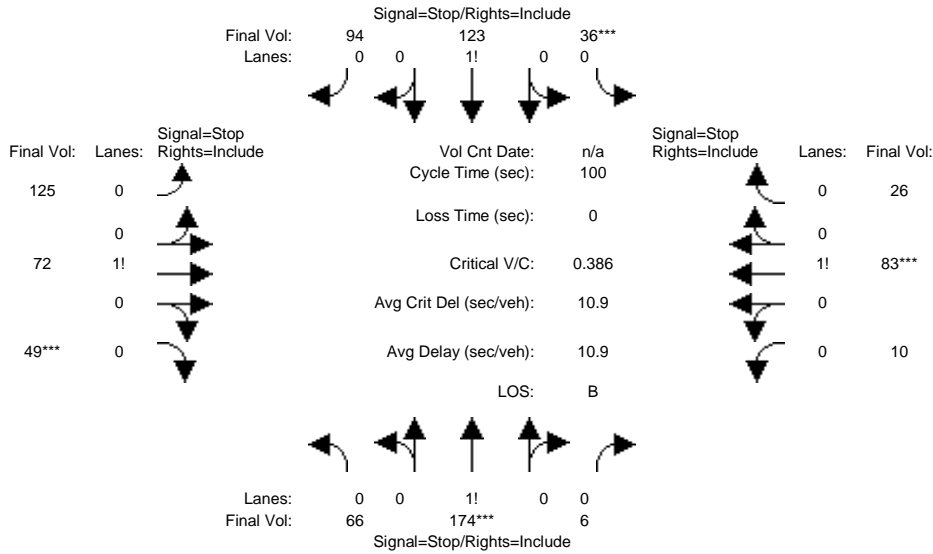

Street Name:	Bandlely Dr						Alves Dr					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R

Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
-------------	---	----	----	---	----	----	---	----	----	---	----	----

Volume Module:

Base Vol:	65	175	17	35	122	91	120	69	47	26	81	34
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	65	175	17	35	122	91	120	69	47	26	81	34
Added Vol:	-1	-7	-11	0	-4	0	0	0	0	-16	-1	-9
PasserByVol:	0	0	0	0	0	0	0	0	0	0	0	0
Initial Fut:	64	168	6	35	118	91	120	69	47	10	80	25
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	66	174	6	36	123	94	125	72	49	10	83	26
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	66	174	6	36	123	94	125	72	49	10	83	26
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	66	174	6	36	123	94	125	72	49	10	83	26

Saturation Flow Module:

Adjustment:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lanes:	0.27	0.71	0.02	0.14	0.49	0.37	0.51	0.29	0.20	0.09	0.69	0.22
Final Sat.:	174	457	16	97	327	252	323	185	126	52	417	130

Capacity Analysis Module:

Vol/Sat:	0.38	0.38	0.38	0.38	0.38	0.38	0.39	0.39	0.39	0.20	0.20	0.20
Crit Moves:	****			****			****			****		
Delay/Veh:	11.2	11.2	11.2	10.7	10.7	10.7	11.3	11.3	11.3	9.6	9.6	9.6
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	11.2	11.2	11.2	10.7	10.7	10.7	11.3	11.3	11.3	9.6	9.6	9.6
LOS by Move:	B	B	B	B	B	B	B	B	B	A	A	A
ApproachDel:	11.2			10.7			11.3			9.6		
Delay Adj:	1.00			1.00			1.00			1.00		
ApprAdjDel:	11.2			10.7			11.3			9.6		
LOS by Appr:	B			B			B			A		
AllWayAvgQ:	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.2	0.2	0.2

Note: Queue reported is the number of cars per lane.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
Intersection #3 Bandlely Dr/Alves Dr  
\*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Stop Sign			Stop Sign			Stop Sign			Stop Sign		
Lanes:	0	0	1!	0	0	0	0	0	1!	0	0	0
Initial Vol:	64	168	6	35	118	91	120	69	47	10	80	25
Major Street Volume:	482											
Minor Approach Volume:	236											
Minor Approach Volume Threshold:	414											

SIGNAL WARRANT DISCLAIMER


This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM

Level Of Service Computation Report  
2000 HCM Unsignalized (Future Volume Alternative)  
Background PM

Intersection #4: De Anza Blvd/Alves Dr

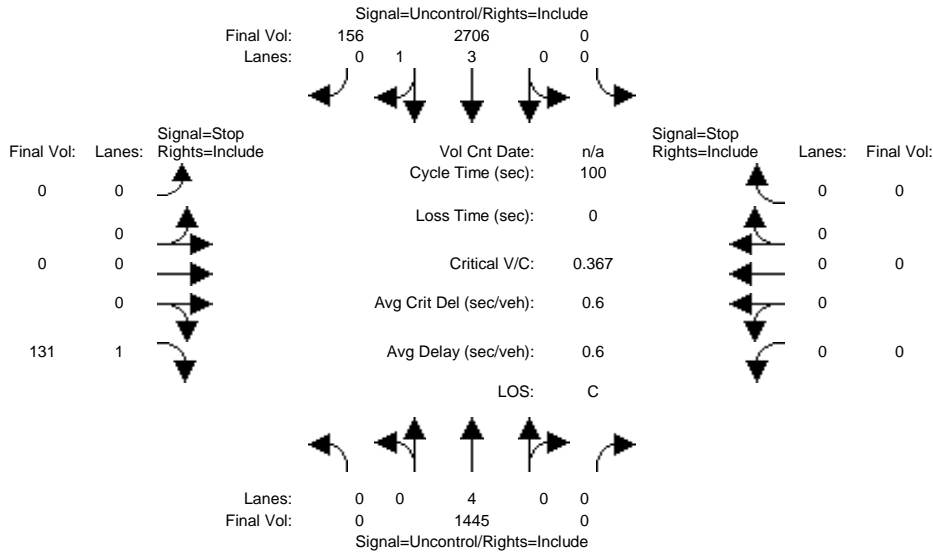

Street Name: De Anza Blvd Alves Dr  
 Approach: North Bound South Bound East Bound West Bound  
 Movement: L - T - R L - T - R L - T - R L - T - R

Volume Module:												
Base Vol:	0	1350	0	0	2575	152	0	0	127	0	0	0
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	1350	0	0	2575	152	0	0	127	0	0	0
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	56	0	0	58	0	0	0	0	0	0	0
Initial Fut:	0	1406	0	0	2633	152	0	0	127	0	0	0
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
PHF Volume:	0	1445	0	0	2706	156	0	0	131	0	0	0
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
FinalVolume:	0	1445	0	0	2706	156	0	0	131	0	0	0

Critical Gap Module:												
Critical Gp:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	6.9	xxxxx	xxxx	xxxxx
FollowUpTim:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	3.3	xxxxx	xxxx	xxxxx

Capacity Module:												
Cnflct Vol:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	755	xxxx	xxxx	xxxxx
Potent Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	356	xxxx	xxxx	xxxxx
Move Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	356	xxxx	xxxx	xxxxx
Volume/Cap:	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	xxxx	0.37	xxxx	xxxx	xxxx

Level Of Service Module:												
2Way95thQ:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	1.6	xxxx	xxxx	xxxxx
Control Del:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	20.9	xxxxx	xxxx	xxxxx
LOS by Move:	*	*	*	*	*	*	*	*	C	*	*	*
Movement:	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT	LT - LTR - RT		LT - LTR - RT	LT - LTR - RT	
Shared Cap.:	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx	xxxx	xxxx	xxxxx
SharedQueue:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shrd ConDel:	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx	xxxxx	xxxx	xxxxx
Shared LOS:	*	*	*	*	*	*	*	*	*	*	*	*
ApproachDel:	xxxxxxx			xxxxxxx					20.9	xxxxxxx		
ApproachLOS:	*			*					C	*		

Note: Queue reported is the number of cars per lane.

Peak Hour Delay Signal Warrant Report

\*\*\*\*\*  
Intersection #4 De Anza Blvd/Alves Dr  
\*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 1406 0	0 2633 152	0 0 127	0 0 0
ApproachDel:	xxxxxx	xxxxxx	20.9	xxxxxx

Approach[eastbound][lanes=1][control=Stop Sign]  
 Signal Warrant Rule #1: [vehicle-hours=0.7]  
 FAIL - Vehicle-hours less than 4 for one lane approach.  
 Signal Warrant Rule #2: [approach volume=127]  
 SUCCEED - Approach volume greater than or equal to 100 for one lane approach.  
 Signal Warrant Rule #3: [approach count=3][total volume=4318]  
 SUCCEED - Total volume greater than or equal to 650 for intersection with less than four approaches.

SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
 Intersection #4 De Anza Blvd/Alves Dr  
 \*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 1406 0	0 2633 152	0 0 127	0 0 0

Major Street Volume: 4191  
 Minor Approach Volume: 127  
 Minor Approach Volume Threshold: -209 [less than minimum of 100]

SIGNAL WARRANT DISCLAIMER


This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Marina Plaza TIAR
DC16-0009
Background and Background PP PM

Level Of Service Computation Report
2000 HCM Unsignalized (Future Volume Alternative)
Background PP PM

Intersection #4: De Anza Blvd/Alves Dr

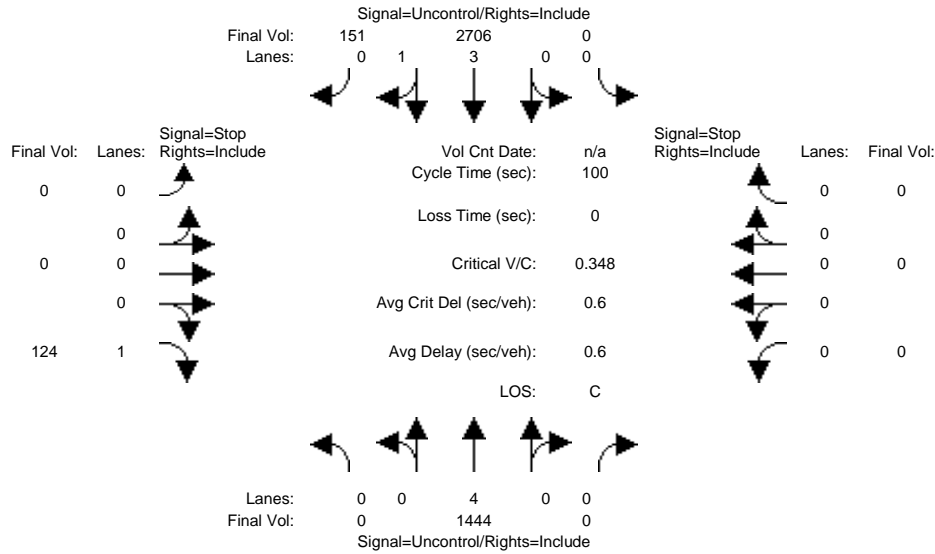

Street Name: De Anza Blvd Alves Dr
Approach: North Bound South Bound East Bound West Bound
Movement: L - T - R L - T - R L - T - R L - T - R

Table with 12 columns representing movements and rows for Volume Module metrics: Base Vol, Growth Adj, Initial Bse, Added Vol, PasserByVol, Initial Fut, User Adj, PHF Adj, PHF Volume, Reduct Vol, FinalVolume.

Table for Critical Gap Module with columns for movements and rows for Critical Gp and FollowUpTim.

Table for Capacity Module with columns for movements and rows for Cnflct Vol, Potent Cap., Move Cap., Volume/Cap.

Table for Level Of Service Module with columns for movements and rows for 2Way95thQ, Control Del, LOS by Move, Shared Cap., SharedQueue, Shrd ConDel, Shared LOS, ApproachDel, ApproachLOS.

Note: Queue reported is the number of cars per lane.

Peak Hour Delay Signal Warrant Report

\*\*\*\*\*
Intersection #4 De Anza Blvd/Alves Dr
\*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant NOT Met



Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 1405 0	0 2633 147	0 0 0 121	0 0 0 0
ApproachDel:	xxxxxx	xxxxxx	20.4	xxxxxx

Approach[eastbound][lanes=1][control=Stop Sign]  
 Signal Warrant Rule #1: [vehicle-hours=0.7]  
 FAIL - Vehicle-hours less than 4 for one lane approach.  
 Signal Warrant Rule #2: [approach volume=121]  
 SUCCEED - Approach volume greater than or equal to 100 for one lane approach.  
 Signal Warrant Rule #3: [approach count=3][total volume=4306]  
 SUCCEED - Total volume greater than or equal to 650 for intersection with less than four approaches.

SIGNAL WARRANT DISCLAIMER

This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.

Peak Hour Volume Signal Warrant Report [Urban]

\*\*\*\*\*  
 Intersection #4 De Anza Blvd/Alves Dr  
 \*\*\*\*\*

Future Volume Alternative: Peak Hour Warrant Met

Approach:	North Bound	South Bound	East Bound	West Bound
Movement:	L - T - R	L - T - R	L - T - R	L - T - R
Control:	Uncontrolled	Uncontrolled	Stop Sign	Stop Sign
Lanes:	0 0 4 0 0	0 0 3 1 0	0 0 0 0 1	0 0 0 0 0
Initial Vol:	0 1405 0	0 2633 147	0 0 0 121	0 0 0 0

Major Street Volume: 4185  
 Minor Approach Volume: 121  
 Minor Approach Volume Threshold: -208 [less than minimum of 100]

SIGNAL WARRANT DISCLAIMER


This peak hour signal warrant analysis should be considered solely as an "indicator" of the likelihood of an unsignalized intersection warranting a traffic signal in the future. Intersections that exceed this warrant are probably more likely to meet one or more of the other volume based signal warrant (such as the 4-hour or 8-hour warrants).

The peak hour warrant analysis in this report is not intended to replace a rigorous and complete traffic signal warrant analysis by the responsible jurisdiction. Consideration of the other signal warrants, which is beyond the scope of this software, may yield different results.



Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PP PM

Intersection #5: Mary Ave/Stevens Creek Blvd

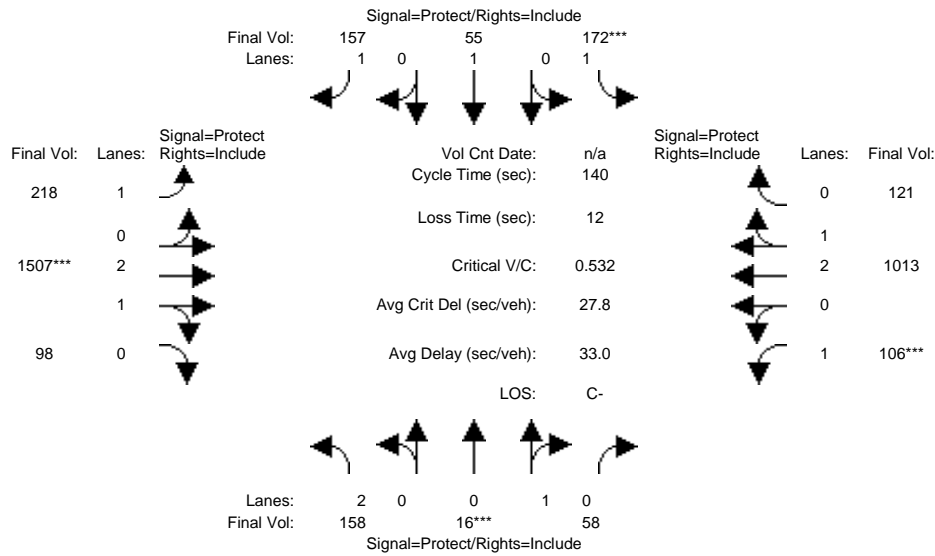

Street Name:	Mary Ave						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:												
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	152	15	56	166	53	151	210	1406	94	102	931	117
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	152	15	56	166	53	151	210	1406	94	102	931	117
Added Vol:	0	0	0	0	0	0	0	-11	0	0	-18	0
PasserByVol:	0	0	0	0	0	0	0	56	0	0	63	0
Initial Fut:	152	15	56	166	53	151	210	1451	94	102	976	117
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	158	16	58	172	55	157	218	1507	98	106	1013	121
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	158	16	58	172	55	157	218	1507	98	106	1013	121
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	158	16	58	172	55	157	218	1507	98	106	1013	121

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	0.95	0.95	0.92	1.00	0.92	0.92	0.98	0.95	0.92	0.99	0.95
Lanes:	2.00	0.21	0.79	1.00	1.00	1.00	1.00	2.81	0.19	1.00	2.67	0.33
Final Sat.:	3150	380	1420	1750	1900	1750	1750	5259	341	1750	5000	599


Capacity Analysis Module:												
Vol/Sat:	0.05	0.04	0.04	0.10	0.03	0.09	0.12	0.29	0.29	0.06	0.20	0.20
Crit Moves:	****			****			****			****		
Green Time:	13.2	10.8	10.8	25.9	23.5	23.5	34.8	75.4	75.4	15.9	56.5	56.5
Volume/Cap:	0.53	0.53	0.53	0.53	0.17	0.53	0.50	0.53	0.53	0.53	0.50	0.50
Delay/Veh:	62.4	66.1	66.1	53.3	50.1	55.1	46.1	21.1	21.1	61.3	31.4	31.4
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	62.4	66.1	66.1	53.3	50.1	55.1	46.1	21.1	21.1	61.3	31.4	31.4
LOS by Move:	E	E	E	D-	D	E+	D	C+	C+	E	C	C
HCM2kAvgQ:	5	4	4	8	2	7	9	15	15	4	12	12

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PM

Intersection #6: Stevens Creek Blvd/Stelling Rd 1613-217 [CMP 2010]

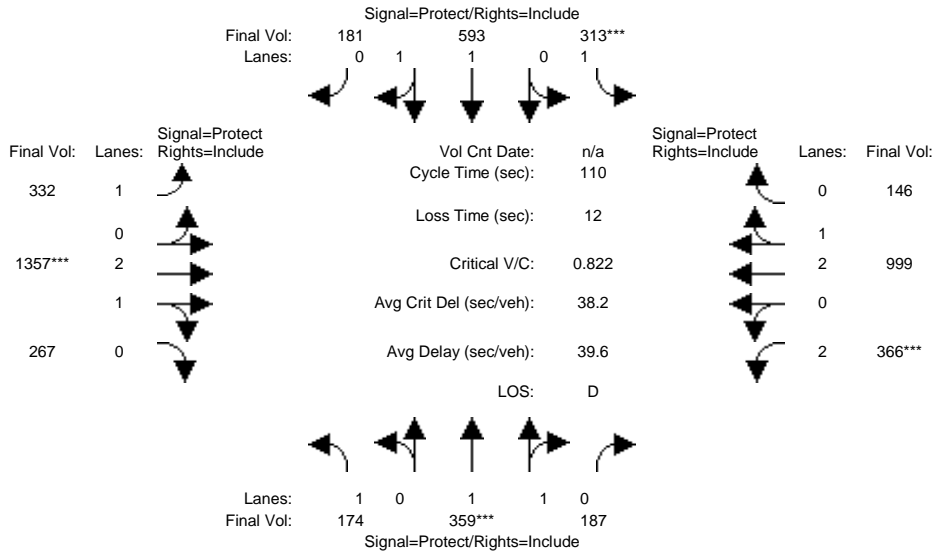

Street Name:	Stelling Road						Stevens Creek Boulevard					
	North Bound			South Bound			East Bound			West Bound		
	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	169	344	180	303	564	174	318	1259	259	351	905	141
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	169	344	180	303	564	174	318	1259	259	351	905	141
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	4	1	0	11	1	4	56	0	4	63	0
Initial Fut:	169	348	181	303	575	175	322	1315	259	355	968	141
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
PHF Volume:	174	359	187	313	593	181	332	1357	267	366	999	146
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	174	359	187	313	593	181	332	1357	267	366	999	146
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	174	359	187	313	593	181	332	1357	267	366	999	146

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.92	0.98	0.95	0.92	0.99	0.95	0.83	0.99	0.95
Lanes:	1.00	1.30	0.70	1.00	1.52	0.48	1.00	2.49	0.51	2.00	2.60	0.40
Final Sat.:	1750	2433	1265	1750	2836	863	1750	4677	921	3150	4887	712


Capacity Analysis Module:												
Vol/Sat:	0.10	0.15	0.15	0.18	0.21	0.21	0.19	0.29	0.29	0.12	0.20	0.20
Crit Moves:	****			****			****			****		
Green Time:	14.1	19.7	19.7	23.9	29.6	29.6	26.2	38.8	38.8	15.6	28.2	28.2
Volume/Cap:	0.78	0.82	0.82	0.82	0.78	0.78	0.80	0.82	0.82	0.82	0.80	0.80
Uniform Del:	46.5	43.4	43.4	41.0	37.2	37.2	39.4	32.5	32.5	45.9	38.2	38.2
IncrcmntDel:	23.0	11.0	11.0	17.9	6.0	6.0	14.7	4.0	4.0	15.7	4.7	4.7
InitQueueDel:	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	0.79	0.64	0.64	0.89	0.77	0.77
Delay/Veh:	69.4	54.5	54.5	58.9	43.2	43.2	45.9	24.7	24.7	56.5	34.2	34.2
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	69.4	54.5	54.5	58.9	43.2	43.2	45.9	24.7	24.7	56.5	34.2	34.2
LOS by Move:	E	D-	D-	E+	D	D	D	C	C	E+	C-	C-
HCM2kAvgQ:	8	11	11	13	14	14	12	17	17	8	13	13

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PP PM

Intersection #6: Stevens Creek Blvd/Stelling Rd 1613-217 [CMP 2010]

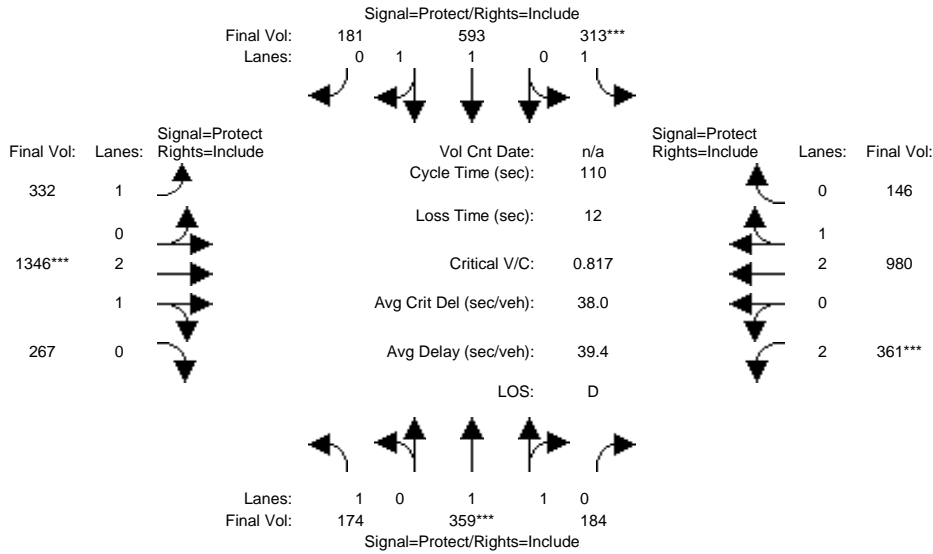

Street Name:	Stelling Road						Stevens Creek Boulevard					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R

Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:

Base Vol:	169	344	180	303	564	174	318	1259	259	351	905	141
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	169	344	180	303	564	174	318	1259	259	351	905	141
Added Vol:	0	0	-3	0	0	0	0	-11	0	-5	-18	0
PasserByVol:	0	4	1	0	11	1	4	56	0	4	63	0
Initial Fut:	169	348	178	303	575	175	322	1304	259	350	950	141
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
PHF Volume:	174	359	184	313	593	181	332	1346	267	361	980	146
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	174	359	184	313	593	181	332	1346	267	361	980	146
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	174	359	184	313	593	181	332	1346	267	361	980	146

Saturation Flow Module:

Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	0.99	0.95	0.92	0.98	0.95	0.92	0.99	0.95	0.83	0.99	0.95
Lanes:	1.00	1.30	0.70	1.00	1.52	0.48	1.00	2.48	0.52	2.00	2.60	0.40
Final Sat.:	1750	2447	1252	1750	2836	863	1750	4671	928	3150	4875	724


Capacity Analysis Module:

Vol/Sat:	0.10	0.15	0.15	0.18	0.21	0.21	0.19	0.29	0.29	0.11	0.20	0.20
Crit Moves:	****			****			****			****		
Green Time:	14.1	19.8	19.8	24.0	29.7	29.7	26.3	38.8	38.8	15.4	27.9	27.9
Volume/Cap:	0.78	0.82	0.82	0.82	0.78	0.78	0.79	0.82	0.82	0.82	0.79	0.79
Delay/Veh:	69.0	54.1	54.1	58.3	43.0	43.0	45.4	24.5	24.5	56.3	34.3	34.3
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	69.0	54.1	54.1	58.3	43.0	43.0	45.4	24.5	24.5	56.3	34.3	34.3
LOS by Move:	E	D-	D-	E+	D	D	D	C	C	E+	C-	C-
HCM2kAvgQ:	8	11	11	13	14	14	12	16	16	8	12	12

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PM

**Intersection #7: Saich Way/Stevens Creek Blvd**

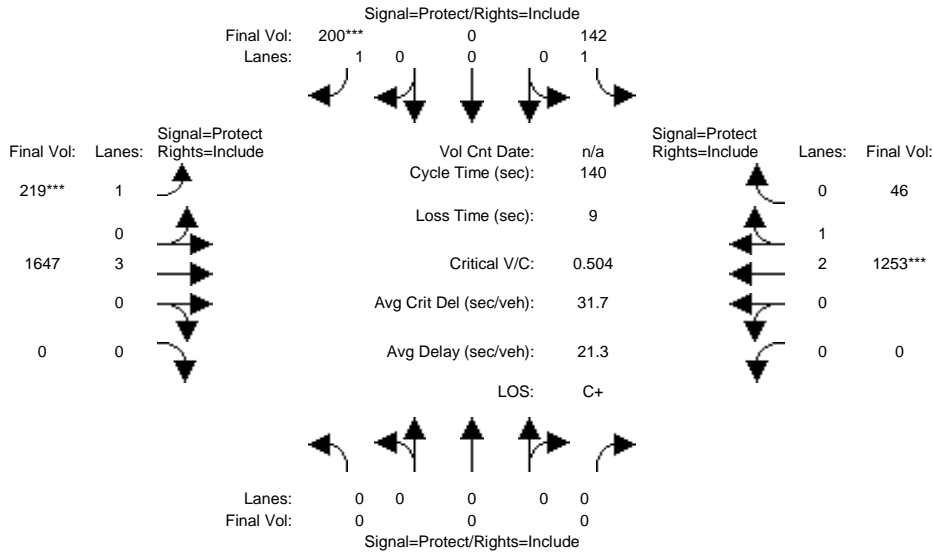

Street Name:	Saich Way						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:												
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	0	0	0	132	0	186	204	1477	0	0	1104	43
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	0	0	132	0	186	204	1477	0	0	1104	43
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	56	0	0	63	0
Initial Fut:	0	0	0	132	0	186	204	1533	0	0	1167	43
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
PHF Volume:	0	0	0	142	0	200	219	1647	0	0	1253	46
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	0	0	0	142	0	200	219	1647	0	0	1253	46
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	0	0	0	142	0	200	219	1647	0	0	1253	46

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	1.00	0.92	0.92	1.00	0.92	0.92	1.00	0.92	0.92	0.98	0.95
Lanes:	0.00	0.00	0.00	1.00	0.00	1.00	1.00	3.00	0.00	0.00	2.89	0.11
Final Sat.:	0	0	0	1750	0	1750	1750	5700	0	0	5401	199


Capacity Analysis Module:												
Vol/Sat:	0.00	0.00	0.00	0.08	0.00	0.11	0.13	0.29	0.00	0.00	0.23	0.23
Crit Moves:						****	****				****	
Green Time:	0.0	0.0	0.0	31.7	0.0	31.7	34.8	99.3	0.0	0.0	64.5	64.5
Volume/Cap:	0.00	0.00	0.00	0.36	0.00	0.50	0.50	0.41	0.00	0.00	0.50	0.50
Uniform Del:	0.0	0.0	0.0	45.6	0.0	47.3	45.2	8.3	0.0	0.0	26.5	26.5
IncrcmntDel:	0.0	0.0	0.0	0.6	0.0	1.0	0.9	0.1	0.0	0.0	0.2	0.2
InitQueueDel:	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Delay Adj:	0.00	0.00	0.00	1.00	0.00	1.00	1.00	1.00	0.00	0.00	1.00	1.00
Delay/Veh:	0.0	0.0	0.0	46.1	0.0	48.3	46.1	8.4	0.0	0.0	26.7	26.7
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	0.0	0.0	0.0	46.1	0.0	48.3	46.1	8.4	0.0	0.0	26.7	26.7
LOS by Move:	A	A	A	D	A	D	D	A	A	A	C	C
HCM2kAvgQ:	0	0	0	6	0	8	8	9	0	0	13	13

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PP PM

Intersection #7: Saich Way/Stevens Creek Blvd

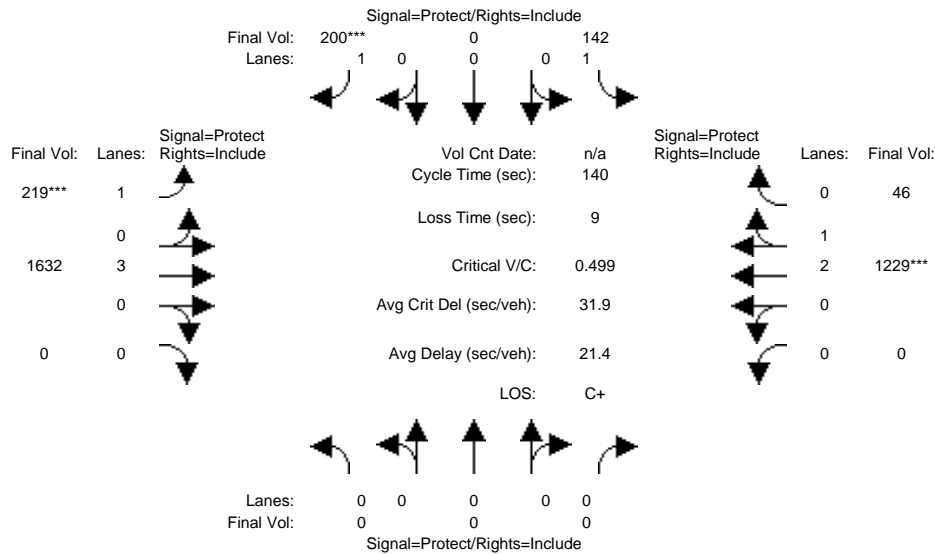

Street Name:	Saich Way						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	0	0	0	132	0	186	204	1477	0	0	1104	43
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	0	0	0	132	0	186	204	1477	0	0	1104	43
Added Vol:	0	0	0	0	0	0	0	-14	0	0	-23	0
PasserByVol:	0	0	0	0	0	0	0	56	0	0	63	0
Initial Fut:	0	0	0	132	0	186	204	1519	0	0	1144	43
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
PHF Volume:	0	0	0	142	0	200	219	1632	0	0	1229	46
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	0	0	0	142	0	200	219	1632	0	0	1229	46
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	0	0	0	142	0	200	219	1632	0	0	1229	46


Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.92	1.00	0.92	0.92	1.00	0.92	0.92	1.00	0.92	0.92	0.98	0.95
Lanes:	0.00	0.00	0.00	1.00	0.00	1.00	1.00	3.00	0.00	0.00	2.89	0.11
Final Sat.:	0	0	0	1750	0	1750	1750	5700	0	0	5397	203

Capacity Analysis Module:												
Vol/Sat:	0.00	0.00	0.00	0.08	0.00	0.11	0.13	0.29	0.00	0.00	0.23	0.23
Crit Moves:						****	****				****	
Green Time:	0.0	0.0	0.0	32.0	0.0	32.0	35.1	99.0	0.0	0.0	63.9	63.9
Volume/Cap:	0.00	0.00	0.00	0.35	0.00	0.50	0.50	0.40	0.00	0.00	0.50	0.50
Delay/Veh:	0.0	0.0	0.0	45.9	0.0	48.0	45.8	8.5	0.0	0.0	27.0	27.0
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	0.0	0.0	0.0	45.9	0.0	48.0	45.8	8.5	0.0	0.0	27.0	27.0
LOS by Move:	A	A	A	D	A	D	D	A	A	A	C	C
HCM2kAvgQ:	0	0	0	6	0	8	8	9	0	0	13	13

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PM

Intersection #8: Bandlely Dr/Stevens Creek Blvd

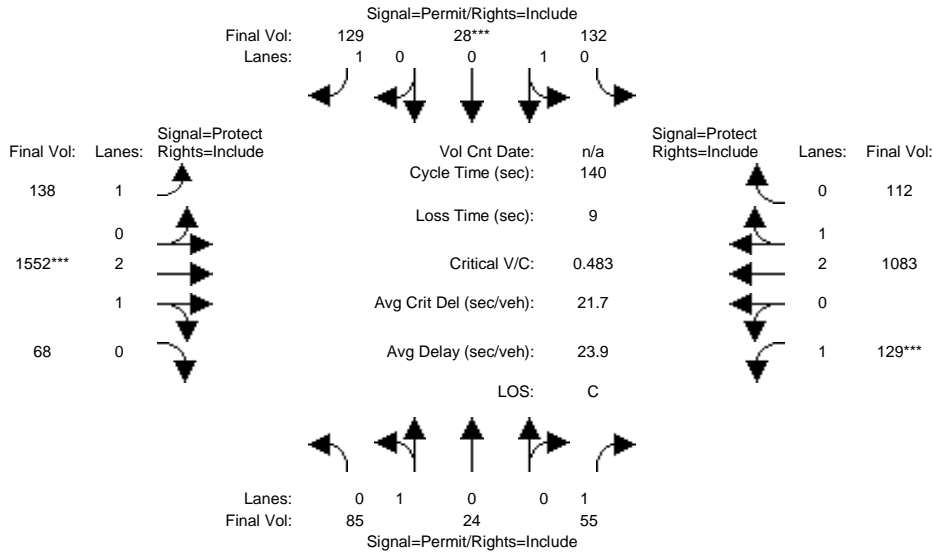

Street Name:	Bandlely Dr						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:												
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	10	10	10	10	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	82	23	53	127	27	124	133	1437	65	124	979	108
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	82	23	53	127	27	124	133	1437	65	124	979	108
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	0	0	0	0	0	0	56	0	0	63	0
Initial Fut:	82	23	53	127	27	124	133	1493	65	124	1042	108
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	85	24	55	132	28	129	138	1552	68	129	1083	112
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	85	24	55	132	28	129	138	1552	68	129	1083	112
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	85	24	55	132	28	129	138	1552	68	129	1083	112

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.95	0.95	0.92	0.95	0.95	0.92	0.92	0.98	0.95	0.92	0.99	0.95
Lanes:	0.78	0.22	1.00	0.82	0.18	1.00	1.00	2.87	0.13	1.00	2.71	0.29
Final Sat.:	1406	394	1750	1484	316	1750	1750	5366	234	1750	5073	526


Capacity Analysis Module:												
Vol/Sat:	0.06	0.06	0.03	0.09	0.09	0.07	0.08	0.29	0.29	0.07	0.21	0.21
Crit Moves:					****			****			****	
Green Time:	25.8	25.8	25.8	25.8	25.8	25.8	28.4	83.9	83.9	21.4	76.8	76.8
Volume/Cap:	0.33	0.33	0.17	0.48	0.48	0.40	0.39	0.48	0.48	0.48	0.39	0.39
Uniform Del:	49.6	49.6	48.1	51.1	51.1	50.3	48.3	15.8	15.8	54.3	18.1	18.1
IncrcmntDel:	0.6	0.6	0.3	1.1	1.1	0.8	0.7	0.1	0.1	1.4	0.1	0.1
InitQueueDel:	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Delay Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Delay/Veh:	50.2	50.2	48.4	52.2	52.2	51.1	49.0	15.9	15.9	55.6	18.2	18.2
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	50.2	50.2	48.4	52.2	52.2	51.1	49.0	15.9	15.9	55.6	18.2	18.2
LOS by Move:	D	D	D	D-	D-	D-	D	B	B	E+	B-	B-
HCM2kAvgQ:	4	4	2	7	7	5	5	13	13	6	10	10

Note: Queue reported is the number of cars per lane.



Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM  
Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PP PM

Intersection #8: Bandlely Dr/Stevens Creek Blvd

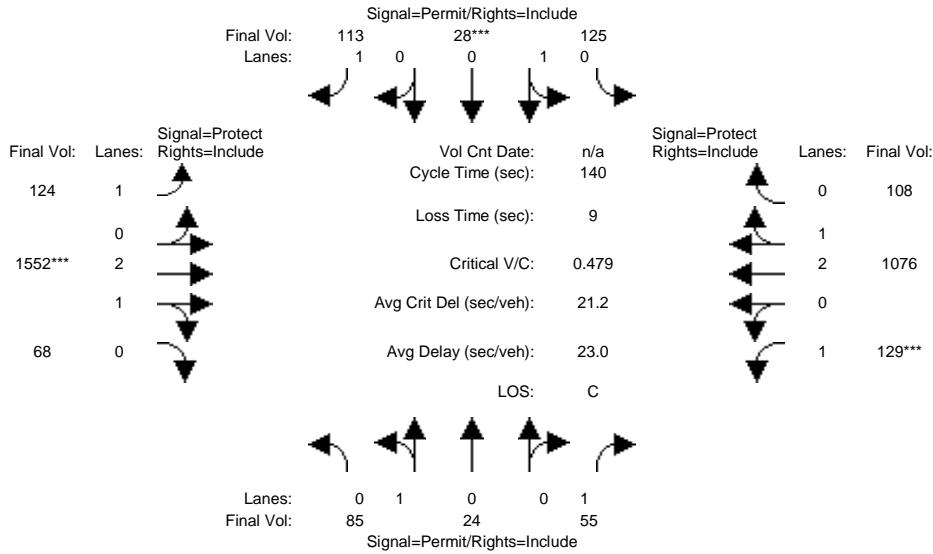

Street Name:	Bandlely Dr						Stevens Creek Blvd					
	North Bound			South Bound			East Bound			West Bound		
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	10	10	10	10	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	82	23	53	127	27	124	133	1437	65	124	979	108
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	82	23	53	127	27	124	133	1437	65	124	979	108
Added Vol:	0	0	0	-7	0	-15	-14	0	0	0	-7	-4
PasserByVol:	0	0	0	0	0	0	0	56	0	0	63	0
Initial Fut:	82	23	53	120	27	109	119	1493	65	124	1035	104
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
PHF Volume:	85	24	55	125	28	113	124	1552	68	129	1076	108
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	85	24	55	125	28	113	124	1552	68	129	1076	108
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	85	24	55	125	28	113	124	1552	68	129	1076	108

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.95	0.95	0.92	0.95	0.95	0.92	0.92	0.98	0.95	0.92	0.99	0.95
Lanes:	0.78	0.22	1.00	0.82	0.18	1.00	1.00	2.87	0.13	1.00	2.72	0.28
Final Sat.:	1406	394	1750	1469	331	1750	1750	5366	234	1750	5088	511


Capacity Analysis Module:												
Vol/Sat:	0.06	0.06	0.03	0.08	0.08	0.06	0.07	0.29	0.29	0.07	0.21	0.21
Crit Moves:					****			****			****	
Green Time:	24.8	24.8	24.8	24.8	24.8	24.8	26.6	84.6	84.6	21.5	79.6	79.6
Volume/Cap:	0.34	0.34	0.18	0.48	0.48	0.36	0.37	0.48	0.48	0.48	0.37	0.37
Delay/Veh:	51.1	51.1	49.2	52.9	52.9	51.4	50.1	15.5	15.5	55.4	16.6	16.6
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	51.1	51.1	49.2	52.9	52.9	51.4	50.1	15.5	15.5	55.4	16.6	16.6
LOS by Move:	D-	D-	D	D-	D-	D-	D	B	B	E+	B	B
HCM2kAvgQ:	4	4	2	7	7	5	5	13	13	6	9	9

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PM

Intersection #9: De Anza Blvd/Stevens Creek Blvd 1638-211 [CMP 2010]

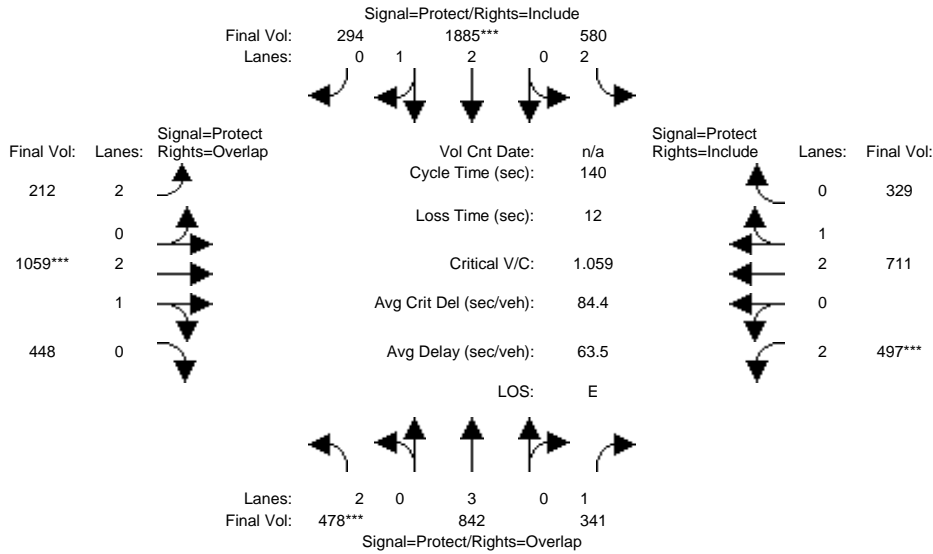

Street Name:	De Anza Boulevard						Stevens Creek Boulevard					
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R

Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:

Base Vol:	470	825	277	521	1844	289	208	985	440	382	636	270
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	470	825	277	521	1844	289	208	985	440	382	636	270
Added Vol:	0	0	0	0	0	0	0	0	0	0	0	0
PasserByVol:	0	3	58	49	9	0	0	56	0	107	63	53
Initial Fut:	470	828	335	570	1853	289	208	1041	440	489	699	323
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
PHF Volume:	478	842	341	580	1885	294	212	1059	448	497	711	329
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	478	842	341	580	1885	294	212	1059	448	497	711	329
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	478	842	341	580	1885	294	212	1059	448	497	711	329

Saturation Flow Module:

Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	1.00	0.92	0.83	0.99	0.95	0.83	1.00	0.95	0.83	1.00	0.95
Lanes:	2.00	3.00	1.00	2.00	2.58	0.42	2.00	2.08	0.92	2.00	2.02	0.98
Final Sat.:	3150	5700	1750	3150	4843	755	3150	3934	1663	3150	3828	1769

Capacity Analysis Module:


Vol/Sat:	0.15	0.15	0.19	0.18	0.39	0.39	0.07	0.27	0.27	0.16	0.19	0.19
Crit Moves:	***				****			****			****	
Green Time:	20.1	31.9	52.7	39.7	51.5	51.5	15.0	35.6	55.7	20.9	41.5	41.5
Volume/Cap:	1.06	0.65	0.52	0.65	1.06	1.06	0.63	1.06	0.68	1.06	0.63	0.63
Uniform Del:	60.0	49.0	33.8	44.1	44.3	44.3	59.8	52.2	34.8	59.6	42.6	42.6
IncrcmntDel:	58.8	1.2	0.7	1.7	37.6	37.6	3.7	41.1	0.8	58.0	0.8	0.8
InitQueueDel:	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Delay Adj:	0.89	0.80	0.60	0.74	0.61	0.61	1.00	1.00	1.00	1.00	1.00	1.00
Delay/Veh:	112.1	40.6	20.9	34.1	64.7	64.7	63.5	93.3	35.6	117.5	43.3	43.3
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	112.1	40.6	20.9	34.1	64.7	64.7	63.5	93.3	35.6	117.5	43.3	43.3
LOS by Move:	F	D	C+	C-	E	E	E	F	D+	F	D	D
HCM2kAvgQ:	18	11	9	12	41	41	6	30	17	19	13	13

Note: Queue reported is the number of cars per lane.

Marina Plaza TIAR  
DC16-0009  
Background and Background PP PM

Level Of Service Computation Report  
2000 HCM Operations (Future Volume Alternative)  
Background PP PM

Intersection #9: De Anza Blvd/Stevens Creek Blvd 1638-211 [CMP 2010]

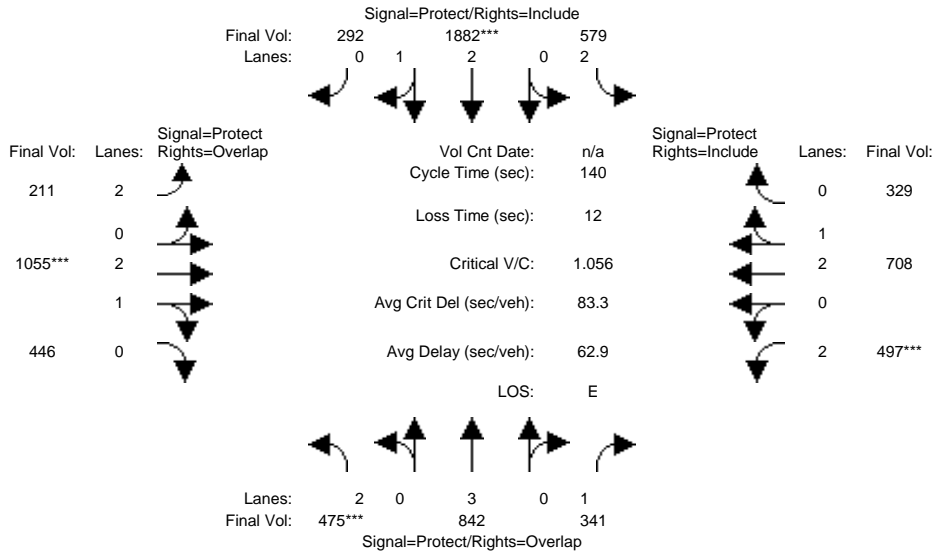

Street Name:	De Anza Boulevard						Stevens Creek Boulevard					
	North Bound			South Bound			East Bound			West Bound		
Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Min. Green:	7	10	10	7	10	10	7	10	10	7	10	10
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Volume Module:												
Base Vol:	470	825	277	521	1844	289	208	985	440	382	636	270
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	470	825	277	521	1844	289	208	985	440	382	636	270
Added Vol:	-3	0	0	-1	-3	-2	-1	-4	-2	0	-3	0
PasserByVol:	0	3	58	49	9	0	0	56	0	107	63	53
Initial Fut:	467	828	335	569	1850	287	207	1037	438	489	696	323
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
PHF Volume:	475	842	341	579	1882	292	211	1055	446	497	708	329
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	475	842	341	579	1882	292	211	1055	446	497	708	329
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Final Volume:	475	842	341	579	1882	292	211	1055	446	497	708	329

Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.83	1.00	0.92	0.83	0.99	0.95	0.83	1.00	0.95	0.83	1.00	0.95
Lanes:	2.00	3.00	1.00	2.00	2.58	0.42	2.00	2.08	0.92	2.00	2.01	0.99
Final Sat.:	3150	5700	1750	3150	4847	752	3150	3935	1662	3150	3823	1774

Capacity Analysis Module:												
Vol/Sat:	0.15	0.15	0.19	0.18	0.39	0.39	0.07	0.27	0.27	0.16	0.19	0.19
Crit Moves:	***			****			****			****		
Green Time:	20.0	31.9	52.8	39.6	51.5	51.5	15.0	35.6	55.6	20.9	41.5	41.5
Volume/Cap:	1.06	0.65	0.52	0.65	1.06	1.06	0.62	1.06	0.68	1.06	0.62	0.62
Delay/Veh:	111.2	40.5	20.8	34.2	63.5	63.5	63.5	92.3	35.6	116.4	43.3	43.3
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	111.2	40.5	20.8	34.2	63.5	63.5	63.5	92.3	35.6	116.4	43.3	43.3
LOS by Move:	F	D	C+	C-	E	E	E	F	D+	F	D	D
HCM2kAvgQ:	18	11	9	12	41	41	6	30	16	19	13	13

Note: Queue reported is the number of cars per lane.

**APPENDIX E: APPROVED, NOT OCCUPIED, AND PENDING PROJECTS**



- i. Apple Campus 2
- ii. Main Street
- iii. Hyatt House
- iv. Hamptons
- v. Nineteen 800

Marina Plaza TIAR										
Trip Generation										
ITE Category	ITE Land Use	ITE Code	Units	Daily	AM Peak Hour			PM Peak Hour		
					In	Out	Total	In	Out	Total
<b>Existing Land Uses</b>										
Retail	Shopping Center	820	1.24 KSF	1,467	69	56	125	68	46	114
	Supermarket	850	34 KSF	3,476	72	44	116	164	158	322
Office	Medical-Dental Office Building	720	1.95 KSF	70	4	1	5	2	5	7
Restaurant	High-Turnover Restaurant	932	11.5 KSF	53	1	0	1	2	3	5
External Existing Vehicle Trips				5,066	146	101	247	236	212	448
Existing MXD Trip Reduction				-456	-22	-16	-38	-38	-34	-72
Net Existing Vehicle Trips				4,610	124	85	209	198	178	376
<b>Proposed Land Uses</b>										
Hotel	Hotel	310	122 Room	997	38	27	65	37	36	73
Residential	Apartment	220	188 DU	1,263	19	77	96	79	42	121
Retail	Shopping Center	820	10.8 KSF	462	6	4	10	19	21	40
Restaurant	Fast Food w/o Drive Through	933	2.8 KSF	1,983	73	49	122	37	35	72
	High-Turnover Restaurant	932	9.0 KSF	1,144	53	44	97	53	36	89
External Vehicle Trips				5,849	189	201	391	225	170	395
Proposed MXD Trip Reduction				-644	-35	-37	-71	-57	-43	-99
Net Proposed Vehicle Trips				5,205	154	164	320	168	127	296
<b>Net New Project Vehicle Trips</b>				<b>595</b>	<b>30</b>	<b>79</b>	<b>111</b>	<b>-30</b>	<b>-51</b>	<b>-80</b>

1. DU = dwelling unit. KSF = 1,000 square feet

2. ITE Trip Generation (9th Edition) land use category 820 - Shopping Center (Adj Streets, 7-9A, 4-6P):

Daily:  $T = 42.70 * (X)$   
AM Peak Hour:  $T = 0.96 * (X)$  (62% in, 38% out)  
PM Peak Hour:  $T = 3.71 * (X)$  (48% in, 52% out)

3. ITE Trip Generation (9th Edition) land use category 720 - Medical-Dental Office Building (Adj Streets, 7-9A, 4-6P):

Daily:  $T = 36.13 * (X)$   
AM Peak Hour:  $T = 2.39 * (X)$  (79% in, 21% out)  
PM Peak Hour:  $T = 3.57 * (X)$  (28% in, 72% out)

4. ITE Trip Generation (9th Edition) land use category 932 - High-Turnover Restaurant (Adj Streets, 7-9A, 4-6P):

Daily:  $T = 127.15 * (X)$

AM Peak Hour:  $T = 10.81*(X)$  (55% in, 45% out)

PM Peak Hour:  $T = 9.85*(X)$  (60% in, 40% out)

5. ITE Trip Generation (9th Edition) land use category 310 - Hotel (Adj Streets, 7-9A, 4-6P):

Daily:  $T = 8.17*(X)$

AM Peak Hour:  $T = 0.53*(X)$  (59% in, 41% out)

PM Peak Hour:  $T = 0.60*(X)$  (51% in, 49% out)

6. ITE Trip Generation (9th Edition) land use category 220 - Apartment (Adj Streets, 7-9A, 4-6P):

Daily:  $T = 6.06*(X)+123.56$

AM Peak Hour:  $T = 0.49*(X)+3.73$  (20% in, 80% out)


PM Peak Hour:  $T = 0.55*(X)+17.65$  (65% in, 35% out)

7. ITE Trip Generation (9th Edition) land use category 933 - Fast-Food w/o Drive-Through Window (Adj Streets, 7-9A, 4-6P):

Daily:  $T = 716.00*(X)$

AM Peak Hour:  $T = 43.87*(X)$  (60% in, 40% out)

PM Peak Hour:  $T = 26.15*(X)$  (51% in, 49% out)

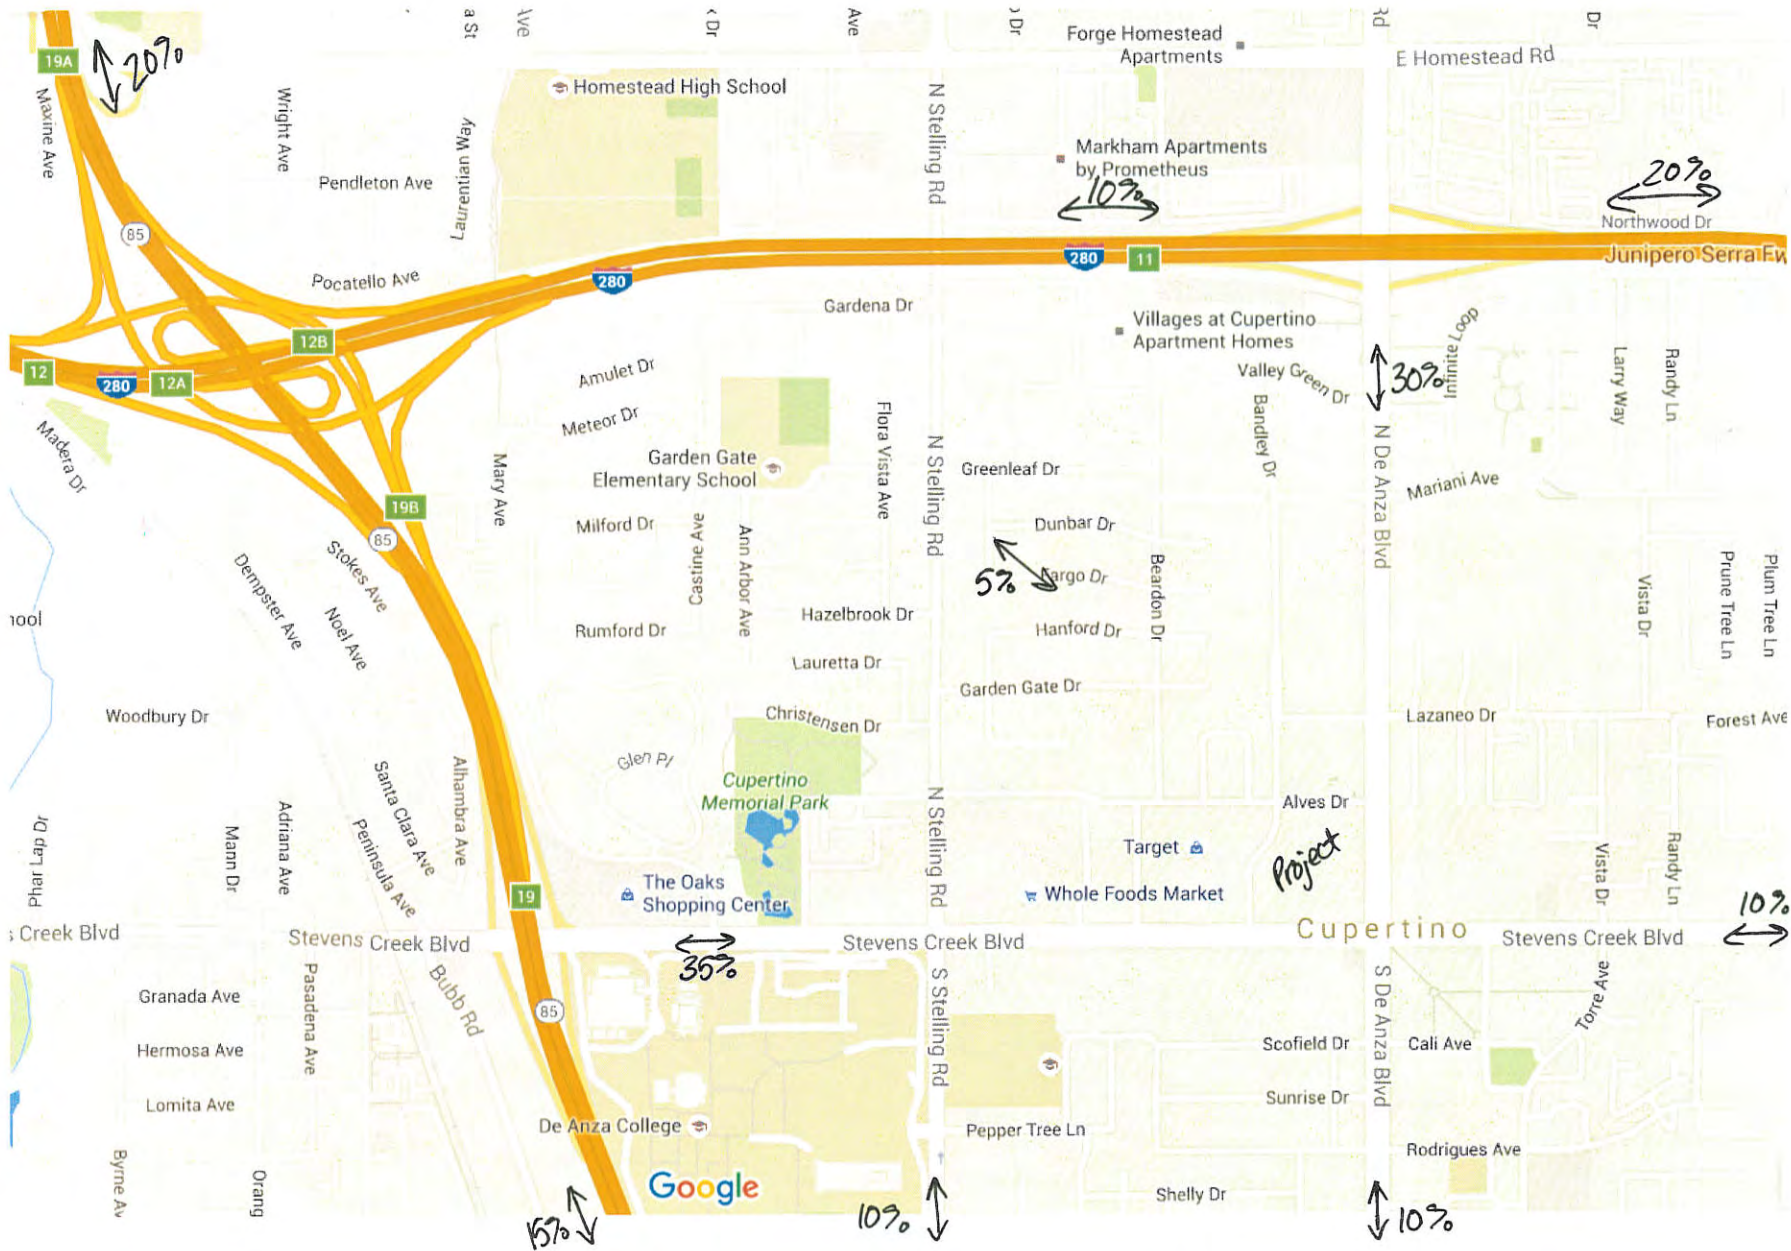

Project Trip Distribution



	<b>N-S</b>	<b>E-W</b>	<b>NBL</b>	<b>NBT</b>	<b>NBR</b>	<b>SBL</b>
1	De Anza Blvd	Mariani Ave	61	1867	201	684
2	De Anza Blvd	Lazaneo Dr	86	2198	64	91
3	Bandley Dr	Alves Dr	38	210	4	7
4	De Anza Blvd	Alves Dr		2315		
5	Mary Ave	Stevens Creek Blvd	64	10	25	97
6	N. Stelling Rd	Stevens Creek Blvd	267	634	119	149
7	Saich Way	Stevens Creek Blvd				41
8	Bandley Dr	Stevens Creek Blvd	74	12	15	32
9	De Anza Blvd	Stevens Creek Blvd	564	1728	195	404

<b>SBT</b>	<b>SBR</b>	<b>EBL</b>	<b>EBT</b>	<b>EBR</b>	<b>WBL</b>	<b>WBT</b>	<b>WBR</b>
995	97	186	233	22	72	60	85
1017	89	63	27	22	58	44	146
65	64	146	64	27	7	53	20
1053	72			86			
28	221	115	662	140	196	865	164
249	167	281	554	122	277	753	148
	98	145	628			1202	57
13	42	64	552	47	37	1220	185
574	226	189	379	114	248	723	323

	<b>N-S</b>	<b>E-W</b>	<b>NBL</b>	<b>NBT</b>	<b>NBR</b>	<b>SBL</b>
1	De Anza Blvd	Mariani Ave	100	1479	52	229
2	De Anza Blvd	Lazaneo Dr	60	1202	57	62
3	Bandley Dr	Alves Dr	65	175	17	35
4	De Anza Blvd	Alves Dr		1350		
5	Mary Ave	Stevens Creek Blvd	152	15	56	166
6	N. Stelling Rd	Stevens Creek Blvd	169	344	180	303
7	Saich Way	Stevens Creek Blvd				132
8	Bandley Dr	Stevens Creek Blvd	82	23	53	127
9	De Anza Blvd	Stevens Creek Blvd	470	825	277	521

<b>SBT</b>	<b>SBR</b>	<b>EBL</b>	<b>EBT</b>	<b>EBR</b>	<b>WBL</b>	<b>WBT</b>	<b>WBR</b>
2134	71	406	90	50	323	44	260
2408	62	159	48	197	38	28	64
122	91	120	69	47	26	81	34
2575	152			127			
53	151	210	1406	94	102	931	117
564	174	318	1259	259	351	905	141
	186	204	1477			1104	43
27	124	133	1437	65	124	979	108
1844	289	208	985	440	382	636	270

	N-S	E-W	NBL	NBT	NBR	SBL	SBT	
1	De Anza Blvd	Mariani Ave		62	1936	206	701	1029
2	De Anza Blvd	Lazaneo Dr		92	2354	69	97	1094
3	Bandley Dr	Alves Dr		44	248	17	8	78
4	De Anza Blvd	Alves Dr			2418			1099
5	Mary Ave	Stevens Creek Blvd		71	11	28	107	31
6	N. Stelling Rd	Stevens Creek Blvd		290	688	132	162	270
7	Saich Way	Stevens Creek Blvd					45	
8	Bandley Dr	Stevens Creek Blvd		78	13	16	47	14
9	De Anza Blvd	Stevens Creek Blvd		596	1815	205	425	607

SBR	EBL	EBT	EBR	WBL	WBT	WBR
99	191	239	23	74	61	87
99	91	29	24	62	47	156
72	164	72	30	35	61	37
80			97			
244	127	743	155	217	986	181
181	305	612	132	309	846	161
107	158	699			1349	62
70	82	585	50	39	1304	199
239	200	405	124	261	763	339

	N-S	E-W	NBL	NBT	NBR	SBL	SBT	
1	De Anza Blvd	Mariani Ave	106	1559		55	244	2263
2	De Anza Blvd	Lazaneo Dr	64	1272		60	66	2546
3	Bandley Dr	Alves Dr	66	174		6	36	123
4	De Anza Blvd	Alves Dr		1386				2646
5	Mary Ave	Stevens Creek Blvd	158	16		58	172	55
6	N. Stelling Rd	Stevens Creek Blvd	174	355		183	313	582
7	Saich Way	Stevens Creek Blvd					142	
8	Bandley Dr	Stevens Creek Blvd	85	24		55	125	28
9	De Anza Blvd	Stevens Creek Blvd	475	839		282	529	1873

SBR	EBL	EBT	EBR	WBL	WBT	WBR	
	76	432	96	53	344	47	277
	61	154	51	209	40	30	68
	94	125	72	49	10	83	26
	151			124			
	157	218	1449	98	106	948	121
	180	328	1288	267	357	915	146
	200	219	1571			1161	46
	113	124	1494	68	129	1010	108
	292	211	998	446	389	644	275



	<b>N-S</b>	<b>E-W</b>	<b>NBL</b>	<b>NBT</b>	<b>NBR</b>	<b>SBL</b>
1	De Anza Blvd	Mariani Ave	62	1956	206	701
2	De Anza Blvd	Lazaneo Dr	92	2398	69	97
3	Bandley Dr	Alves Dr	43	236	4	8
4	De Anza Blvd	Alves Dr		2460		
5	Mary Ave	Stevens Creek Blvd	71	11	28	107
6	N. Stelling Rd	Stevens Creek Blvd	290	703	134	162
7	Saich Way	Stevens Creek Blvd				45
8	Bandley Dr	Stevens Creek Blvd	78	13	16	34
9	De Anza Blvd	Stevens Creek Blvd	592	1827	320	477

<b>SBT</b>	<b>SBR</b>	<b>EBL</b>	<b>EBT</b>	<b>EBR</b>	<b>WBL</b>	<b>WBT</b>	<b>WBR</b>
1072	99	191	239	23	74	61	87
1143	95	67	29	24	62	47	156
107	106	164	72	30	8	60	22
1152	75			90			
31	244	127	782	155	217	992	181
272	188	306	651	132	300	852	161
	107	158	735			1347	62
14	44	68	633	50	39	1327	196
604	237	199	446	120	288	794	372

	N-S	E-W	NBL	NBT	NBR	SBL	SBT	
1	De Anza Blvd	Mariani Ave		106	1635	55	244	2334
2	De Anza Blvd	Lazaneo Dr		64	1333	60	66	2612
3	Bandley Dr	Alves Dr		67	182	18	36	127
4	De Anza Blvd	Alves Dr			1445			2706
5	Mary Ave	Stevens Creek Blvd		158	16	58	172	55
6	N. Stelling Rd	Stevens Creek Blvd		174	359	187	313	593
7	Saich Way	Stevens Creek Blvd					142	
8	Bandley Dr	Stevens Creek Blvd		85	24	55	132	28
9	De Anza Blvd	Stevens Creek Blvd		478	842	341	580	1885

SBR	EBL	EBT	EBR	WBL	WBT	WBR	
	76	432	96	53	344	47	277
	66	168	51	209	40	30	68
	94	125	72	49	27	84	35
	156			131			
	157	218	1518	98	106	1032	121
	181	332	1357	267	366	999	146
	200	219	1647			1253	46
	129	138	1552	68	129	1083	112
	294	212	1059	448	497	711	329

	N-S	E-W	NBL	NBT	NBR	SBL	SBT	
1	De Anza Blvd	Mariani Ave		62	1980	206	701	1081
2	De Anza Blvd	Lazaneo Dr		92	2399	69	97	1149
3	Bandley Dr	Alves Dr		44	248	17	8	111
4	De Anza Blvd	Alves Dr			2461			1152
5	Mary Ave	Stevens Creek Blvd		71	11	28	107	31
6	N. Stelling Rd	Stevens Creek Blvd		290	703	138	162	272
7	Saich Way	Stevens Creek Blvd					45	
8	Bandley Dr	Stevens Creek Blvd		78	13	16	47	14
9	De Anza Blvd	Stevens Creek Blvd		596	1827	320	478	608

SBR	EBL	EBT	EBR	WBL	WBT	WBR
99	191	239	23	74	61	87
99	91	29	24	62	47	156
106	164	72	30	35	61	37
80			97			
244	127	793	155	217	1022	181
188	306	662	132	309	882	161
107	158	749			1385	62
70	82	633	50	39	1339	199
239	200	454	124	288	797	372

	N-S	E-W	NBL	NBT	NBR	SBL	SBT	
1	De Anza Blvd	Mariani Ave	106	1619		55	244	2325
2	De Anza Blvd	Lazaneo Dr	64	1332		60	66	2607
3	Bandley Dr	Alves Dr	66	174		6	36	123
4	De Anza Blvd	Alves Dr		1444				2706
5	Mary Ave	Stevens Creek Blvd	158	16		58	172	55
6	N. Stelling Rd	Stevens Creek Blvd	174	359		184	313	593
7	Saich Way	Stevens Creek Blvd					142	
8	Bandley Dr	Stevens Creek Blvd	85	24		55	125	28
9	De Anza Blvd	Stevens Creek Blvd	475	842		341	579	1882

SBR	EBL	EBT	EBR	WBL	WBT	WBR
76	432	96	53	344	47	277
61	154	51	209	40	30	68
94	125	72	49	10	83	26
151			124			
157	218	1507	98	106	1013	121
181	332	1346	267	361	980	146
200	219	1632			1229	46
113	124	1552	68	129	1076	108
292	211	1055	446	497	708	329



**Fleet Mix Data**

2%      Percent Heavy Vehicles Assumed in HCM methodology

<b>Roadway Segment</b>	<b>Speed Limit (mph)</b>
I-280	65
De Anza Boulevard	40
Stevens Creek Boulevard	35
Alves Drive	25
Bandley Drive	30

## COCU-08 Cupertino Marina

### BACKGROUND

#	ROADWAY	SEGMENT	ADT	POSTED SPEED LIMIT	LANE DISTANCE	SITE CONDITION	LANES	GRADE (%)
1	De Anza Blvd	Mariani to Lazaneo	45,270	40	84	Soft	8D	0%
2	De Anza Blvd	Lazaneo to Alves	43,180	40	84	Soft	8D	0%
3	De Anza Blvd	Alves to Stevens Creek	42,820	40	84	Soft	8D	0%
4	Stevens Creek Blvd	Mary to Stelling	31,810	35	84	Soft	6D	0%
5	Stevens Creek Blvd	Stelling to Saich	33,100	35	84	Soft	6D	0%
6	Stevens Creek Blvd	Saich to Bandley	33,680	35	84	Soft	6D	0%
7	Stevens Creek Blvd	Bandley to De Anza	32,020	35	84	Soft	6D	0%
8	Bandley	Stevens Creek to Alves	5,220	30	24	Soft	2D	0%
9	Alves	Bandley to De Anza	2,870	25	24	Soft	2D	0%
					48	Soft		0%
					84	Soft		0%
					84	Soft		0%
					48	Soft		0%
					48	Soft		0%
15					#N/A	Soft		0%
16					#N/A	Soft		0%
17					#N/A	Soft		0%
18					#N/A	Soft		0%
19					#N/A	Soft		0%
20					#N/A	Soft		0%
21					#N/A	Soft		0%
22					#N/A	Soft		0%
23					#N/A	Soft		0%
24					#N/A	Soft		0%
25					#N/A	Soft		0%
26					#N/A	Soft		0%
27					#N/A	Soft		0%
28					#N/A	Soft		0%
29					#N/A	Soft		0%
30					54	Soft		0%

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30

<b>ANALYST</b>
AW

ROAD CLASSIFICATION	SPEED	LANE DISTANCE
2U	40	12
4U	40	36
4D	45	48
6D	45	84
2D	40	24

73.6	75.10%
13.6	13.88%
10.22	10.43%

VEHICLE MIX INPUTS			
DAILY		HOURLY	
% A	98.00%	DAY	75.5%
% MT	1.00%	EVENING	14.0%
% HT	1.00%	NIGHT	10.5%

Source: Riverside, County of, Department of Public Health, Office of Industrial Hygiene. 2009, November. For Determining and Mitigating Traf  
Fehr & Peers, Marina Plaza Draft Transportation Impact Analysis, April 2016

Vehicle	Overall %	Day (7 AM to Evening	7 Night (10 PM to 7 AM)	
Auto	97%	73.60	13.60	10.22
Medium Truck	2%	0.90	0.04	0.90
Heavy Truck	1%	0.35	0.04	0.35
		74.85	13.68	11.47

COCU-08 Cupertino Marina  
BACKGROUND CONDITIONS NOISE CONTOURS RESULT SUMMARY TABLE

#	ROADWAY	SEGMENT	TRAFFIC VOLUMES	LEVEL AT 50 FT.	DISTANCE TO NOISE CONTOUR (FT.)		
					70 dBA CNEL	65 dBA CNEL	60 dBA CNEL
1	De Anza Blvd	Mariani to Lazaneo	45,270	77.3	154	331	713
2	De Anza Blvd	Lazaneo to Alves	43,180	77.1	149	321	691
3	De Anza Blvd	Alves to Stevens Creek	42,820	77.1	148	319	687
4	Stevens Creek Blvd	Mary to Stelling	31,810	74.4	98	211	456
5	Stevens Creek Blvd	Stelling to Saich	33,100	74.6	101	217	468
6	Stevens Creek Blvd	Saich to Bandley	33,680	74.6	102	220	473
7	Stevens Creek Blvd	Bandley to De Anza	32,020	74.4	99	212	458
8	Bandley	Stevens Creek to Alves	5,220	61.2	13	28	60
9	Alves	Bandley to De Anza	2,870	56.9	7	14	31
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
15	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
16	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
17	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
18	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
19	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
20	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
21	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
22	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
23	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
24	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
25	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
26	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
27	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
28	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
29	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
30	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!

**COCU-08 Cupertino Marina  
BACKGROUND PLUS PROJECT**

#	ROADWAY	SEGMENT	ADT	POSTED SPEED LIMIT	LANE DISTANCE	SITE CONDITION	LANES	GRADE (%)
1	De Anza Blvd	Mariani to Lazaneo	45,020	40	84	Soft	8D	0%
2	De Anza Blvd	Lazaneo to Alves	43,120	40	84	Soft	8D	0%
3	De Anza Blvd	Alves to Stevens Creek	42,740	40	84	Soft	8D	0%
4	Stevens Creek Blvd	Mary to Stelling	32,800	35	84	Soft	6D	0%
5	Stevens Creek Blvd	Stelling to Saich	33,300	35	84	Soft	6D	0%
6	Stevens Creek Blvd	Saich to Bandley	30,180	35	84	Soft	6D	0%
7	Stevens Creek Blvd	Bandley to De Anza	32,020	35	84	Soft	6D	0%
8	Bandley	Stevens Creek to Alves	5,220	30	24	Soft	2D	0%
9	Alves	Bandley to De Anza	2,870	25	24	Soft	2D	0%
					48	Soft		0%
					84	Soft		0%
					84	Soft		0%
					48	Soft		0%
					48	Soft		0%
15					#N/A	Soft		0%
16					#N/A	Soft		0%
17					#N/A	Soft		0%
18					#N/A	Soft		0%
19					#N/A	Soft		0%
20					#N/A	Soft		0%
21					#N/A	Soft		0%
22					#N/A	Soft		0%
23					#N/A	Soft		0%
24					#N/A	Soft		0%
25					#N/A	Soft		0%
26					#N/A	Soft		0%
27					#N/A	Soft		0%
28					#N/A	Soft		0%
29					#N/A	Soft		0%
30					54	Soft		0%

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30



<b>ANALYST</b>
AW

ROAD CLASSIFICATION	SPEED	LANE DISTANCE
2U	40	12
4U	40	36
4D	45	48
6D	45	84
2D	40	24

73.6	75.10%
13.6	13.88%
10.22	10.43%

VEHICLE MIX INPUTS			
DAILY		HOURLY	
% A	98.00%	DAY	75.5%
% MT	1.00%	EVENING	14.0%
% HT	1.00%	NIGHT	10.5%

Source: Riverside, County of, Department of Public Health, Office of Industrial Hygiene. 2009, November. For Determining and Mitigating Traf  
 Riverside County Fleet Mix: Secondary, Collectors, or Smaller

Vehicle	Overall %	Day (7 AM to Evening	7 Night (10 PM to 7 AM)	
Auto	97%	73.60	13.60	10.22
Medium Truck	2%	0.90	0.04	0.90
Heavy Truck	1%	0.35	0.04	0.35
		74.85	13.68	11.47

COCU-08 Cupertino Marina

BACKGROUND PLUS PROJECT CONDITIONS NOISE CONTOURS RESULT SUMMARY TABLE

#	ROADWAY	SEGMENT	TRAFFIC VOLUMES	LEVEL AT 50 FT.	DISTANCE TO NOISE CONTOUR (FT.)		
					70 dBA CNEL	65 dBA CNEL	60 dBA CNEL
1	De Anza Blvd	Mariani to Lazaneo	45,020	77.3	153	330	711
2	De Anza Blvd	Lazaneo to Alves	43,120	77.1	149	321	691
3	De Anza Blvd	Alves to Stevens Creek	42,740	77.1	148	319	687
4	Stevens Creek Blvd	Mary to Stelling	32,800	74.5	100	216	465
5	Stevens Creek Blvd	Stelling to Saich	33,300	74.6	101	218	470
6	Stevens Creek Blvd	Saich to Bandley	30,180	74.2	95	204	440
7	Stevens Creek Blvd	Bandley to De Anza	32,020	74.4	99	212	458
8	Bandley	Stevens Creek to Alves	5,220	61.2	13	28	60
9	Alves	Bandley to De Anza	2,870	56.9	7	14	31
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
15	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
16	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
17	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
18	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
19	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
20	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
21	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
22	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
23	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
24	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
25	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
26	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
27	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
28	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
29	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
30	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!

**COCU-08 Cupertino Marina**

**EXISTING NO PROJECT**

#	ROADWAY	SEGMENT	ADT	POSTED SPEED LIMIT	LANE DISTANCE	SITE CONDITION	LANES	GRADE (%)
1	De Anza Blvd	Mariani to Lazaneo	41,380	40	84	Soft	8D	0%
2	De Anza Blvd	Lazaneo to Alves	40,770	40	84	Soft	8D	0%
3	De Anza Blvd	Alves to Stevens Creek	40,520	40	84	Soft	8D	0%
4	Stevens Creek Blvd	Mary to Stelling	30,840	35	84	Soft	6D	0%
5	Stevens Creek Blvd	Stelling to Saich	31,390	35	84	Soft	6D	0%
6	Stevens Creek Blvd	Saich to Bandley	28,200	35	84	Soft	6D	0%
7	Stevens Creek Blvd	Bandley to De Anza	30,280	35	84	Soft	6D	0%
9	Bandley	Stevens Creek to Alves	5,420	30	24	Soft	2D	0%
9	Alves	Bandley to De Anza	2,790	25	24	Soft	2D	0%
					48	Soft		0%
					84	Soft		0%
					84	Soft		0%
					48	Soft		0%
					48	Soft		0%
15					#N/A	Soft		0%
16					#N/A	Soft		0%
17					#N/A	Soft		0%
18					#N/A	Soft		0%
19					#N/A	Soft		0%
20					#N/A	Soft		0%
21					#N/A	Soft		0%
22					#N/A	Soft		0%
23					#N/A	Soft		0%
24					#N/A	Soft		0%
25					#N/A	Soft		0%
26					#N/A	Soft		0%
27					#N/A	Soft		0%
28					#N/A	Soft		0%
29					#N/A	Soft		0%
30					54	Soft		0%

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30

<b>ANALYST</b>
NJF

ROAD CLASSIFICATION	SPEED	LANE DISTANCE
2U	40	12
4U	40	36
4D	45	48
6D	45	84
2D	40	24

73.6	75.10%
13.6	13.88%
10.22	10.43%

VEHICLE MIX INPUTS			
DAILY		HOURLY	
% A	98.00%	DAY	75.5%
% MT	1.00%	EVENING	14.0%
% HT	1.00%	NIGHT	10.5%

We have different values from the client/traffic study, is it ok to change these?

Source: Riverside, County of, Department of Public Health, Office of Industrial Hygiene. 2009, November. For Determining and Mitigating Traf  
 Riverside County Fleet Mix: Secondary, Collectors, or Smaller

Vehicle	Overall %	Day (7 AM to Evening	7 Night (10 PM to 7 AM)	
Auto	97%	73.60	13.60	10.22
Medium Truck	2%	0.90	0.04	0.90
Heavy Truck	1%	0.35	0.04	0.35
		74.85	13.68	11.47

COCU-08 Cupertino Marina  
EXISTING NO PROJECT CONDITIONS NOISE CONTOURS RESULT SUMMARY TABLE

#	ROADWAY	SEGMENT	TRAFFIC VOLUMES	LEVEL AT 50 FT.	DISTANCE TO NOISE CONTOUR (FT.)		
					70 dBA CNEL	65 dBA CNEL	60 dBA CNEL
1	De Anza Blvd	Mariani to Lazaneo	41,380	76.9	145	312	672
2	De Anza Blvd	Lazaneo to Alves	40,770	76.9	143	309	665
3	De Anza Blvd	Alves to Stevens Creek	40,520	76.8	143	308	663
4	Stevens Creek Blvd	Mary to Stelling	30,840	74.3	96	207	446
5	Stevens Creek Blvd	Stelling to Saich	31,390	74.3	97	210	452
6	Stevens Creek Blvd	Saich to Bandley	28,200	73.9	91	195	420
7	Stevens Creek Blvd	Bandley to De Anza	30,280	74.2	95	205	441
9	Bandley	Stevens Creek to Alves	5,420	61.4	13	29	62
9	Alves	Bandley to De Anza	2,790	56.8	7	14	31
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
15	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
16	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
17	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
18	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
19	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
20	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
21	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
22	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
23	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
24	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
25	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
26	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
27	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
28	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
29	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
30	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!

**COCU-08 Cupertino Marina**

**EXISTING PLUS PROJECT**

#	ROADWAY	SEGMENT	ADT	POSTED SPEED LIMIT	LANE DISTANCE	SITE CONDITION	LANES	GRADE (%)
1	De Anza Blvd	Mariani to Lazaneo	43,800	40	84	Soft	8D	0%
2	De Anza Blvd	Lazaneo to Alves	42,090	40	84	Soft	8D	0%
3	De Anza Blvd	Alves to Stevens Creek	41,560	40	84	Soft	8D	0%
4	Stevens Creek Blvd	Mary to Stelling	31,520	35	84	Soft	6D	0%
5	Stevens Creek Blvd	Stelling to Saich	32,020	35	84	Soft	6D	0%
6	Stevens Creek Blvd	Saich to Bandley	29,200	35	84	Soft	6D	0%
7	Stevens Creek Blvd	Bandley to De Anza	30,660	35	84	Soft	6D	0%
8	Bandley	Stevens Creek to Alves	5,220	30	24	Soft	2D	0%
9	Alves	Bandley to De Anza	2,750	25	24	Soft	2D	0%
					48	Soft		0%
					84	Soft		0%
					84	Soft		0%
					48	Soft		0%
					48	Soft		0%
15					#N/A	Soft		0%
16					#N/A	Soft		0%
17					#N/A	Soft		0%
18					#N/A	Soft		0%
19					#N/A	Soft		0%
20					#N/A	Soft		0%
21					#N/A	Soft		0%
22					#N/A	Soft		0%
23					#N/A	Soft		0%
24					#N/A	Soft		0%
25					#N/A	Soft		0%
26					#N/A	Soft		0%
27					#N/A	Soft		0%
28					#N/A	Soft		0%
29					#N/A	Soft		0%
30					54	Soft		0%

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30



<b>ANALYST</b>
AW

ROAD CLASSIFICATION	SPEED	LANE DISTANCE
2U	40	12
4U	40	36
4D	45	48
6D	45	84
2D	40	24

73.6	75.10%
13.6	13.88%
10.22	10.43%

VEHICLE MIX INPUTS			
DAILY		HOURLY	
% A	98.00%	DAY	75.5%
% MT	1.00%	EVENING	14.0%
% HT	1.00%	NIGHT	10.5%

Source: Riverside, County of, Department of Public Health, Office of Industrial Hygiene. 2009, November. For Determining and Mitigating Traf  
 Riverside County Fleet Mix: Secondary, Collectors, or Smaller

Vehicle	Overall %	Day (7 AM to Evening	7 Night (10 PM to 7 AM)	
Auto	97%	73.60	13.60	10.22
Medium Truck	2%	0.90	0.04	0.90
Heavy Truck	1%	0.35	0.04	0.35
		74.85	13.68	11.47

COCU-08 Cupertino Marina  
EXISTING PLUS PROJECT CONDITIONS NOISE CONTOURS RESULT SUMMARY TABLE

#	ROADWAY	SEGMENT	TRAFFIC VOLUMES	LEVEL AT 50 FT.	DISTANCE TO NOISE CONTOUR (FT.)		
					70 dBA CNEL	65 dBA CNEL	60 dBA CNEL
1	De Anza Blvd	Mariani to Lazaneo	43,800	77.2	150	324	698
2	De Anza Blvd	Lazaneo to Alves	42,090	77.0	146	315	680
3	De Anza Blvd	Alves to Stevens Creek	41,560	76.9	145	313	674
4	Stevens Creek Blvd	Mary to Stelling	31,520	74.4	98	210	453
5	Stevens Creek Blvd	Stelling to Saich	32,020	74.4	99	212	458
6	Stevens Creek Blvd	Saich to Bandley	29,200	74.0	93	200	430
7	Stevens Creek Blvd	Bandley to De Anza	30,660	74.2	96	206	445
8	Bandley	Stevens Creek to Alves	5,220	61.2	13	28	60
9	Alves	Bandley to De Anza	2,750	56.7	7	14	30
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
0	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
15	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
16	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
17	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
18	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
19	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
20	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
21	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
22	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
23	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
24	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
25	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
26	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
27	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
28	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
29	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!
30	0	0	0	#NUM!	#NUM!	#NUM!	#NUM!

**Noise Contours for Existing No Project Conditions**

Roadway	Segment	Daily Traffic Volumes	Noise level at 50 feet (dBA CNEL)	Distance to noise contour (feet)		
				70 dBA CNEL	65 dBA CNEL	60 dBA CNEL
De Anza Blvd	Mariani to Lazaneo	41,380	76.9	145	312	672
De Anza Blvd	Lazaneo to Alves	40,770	76.9	143	309	665
De Anza Blvd	Alves to Stevens Creek	40,520	76.8	143	308	663
Stevens Creek Blvd	Mary to Stelling	30,840	74.3	96	207	446
Stevens Creek Blvd	Stelling to Saich	31,390	74.3	97	210	452
Stevens Creek Blvd	Saich to Bandlely	28,200	73.9	91	195	420
Stevens Creek Blvd	Bandlely to De Anza	30,280	74.2	95	205	441
Bandlely	Stevens Creek to Alves	5,420	61.4	13	29	62

**Noise Contours for Existing Plus Project Conditions**

Roadway	Segment	Daily Traffic Volumes	Noise level at 50 feet (dBA CNEL)	Distance to noise contour (feet)		
				70 dBA CNEL	65 dBA CNEL	60 dBA CNEL
De Anza Blvd	Mariani to Lazaneo	43,800	77.2	150	324	698
De Anza Blvd	Lazaneo to Alves	42,090	77.0	146	315	680
De Anza Blvd	Alves to Stevens Creek	41,560	76.9	145	313	674
Stevens Creek Blvd	Mary to Stelling	31,520	74.4	98	210	453
Stevens Creek Blvd	Stelling to Saich	32,020	74.4	99	212	458
Stevens Creek Blvd	Saich to Bandley	29,200	74.0	93	200	430
Stevens Creek Blvd	Bandley to De Anza	30,660	74.2	96	206	445
Bandley	Stevens Creek to Alves	5,220	61.2	13	28	60

Existing Conditions Project Off-Site Contributions

Roadway	Segment	CNEL at 50 feet (dBA)			
		No Project	With Project	Project Contribution	Potential Impact?
De Anza Blvd	Mariani to Lazaneo	76.9	77.2	0.3	no
De Anza Blvd	Lazaneo to Alves	76.9	77.0	0.1	no
De Anza Blvd	Alves to Stevens Creek	76.8	76.9	0.1	no
Stevens Creek Blvd	Mary to Stelling	74.3	74.4	0.1	no
Stevens Creek Blvd	Stelling to Saich	74.3	74.4	0.1	no
Stevens Creek Blvd	Saich to Bandley	73.9	74.0	0.1	no
Stevens Creek Blvd	Bandley to De Anza	74.2	74.2	0.0	no
Bandley	Stevens Creek to Alves	61.4	61.2	-0.2	no

**Noise Contours for Background No Project Conditions**

Roadway	Segment	Daily Traffic Volumes	Noise level at 50 feet (dBA CNEL)	Distance to noise contour (feet)		
				70 dBA CNEL	65 dBA CNEL	60 dBA CNEL
De Anza Blvd	Mariani to Lazaneo	45,270	77.3	154	331	713
De Anza Blvd	Lazaneo to Alves	43,180	77.1	149	321	691
De Anza Blvd	Alves to Stevens Creek	42,820	77.1	148	319	687
Stevens Creek Blvd	Mary to Stelling	31,810	74.4	98	211	456
Stevens Creek Blvd	Stelling to Saich	33,100	74.6	101	217	468
Stevens Creek Blvd	Saich to Bandlely	33,680	74.6	102	220	473
Stevens Creek Blvd	Bandlely to De Anza	32,020	74.4	99	212	458
Bandlely	Stevens Creek to Alves	5,220	61.2	13	28	60

**Noise Contours for Background Plus Project Conditions**

Roadway	Segment	Daily Traffic Volumes	Noise level at 50 feet (dBA CNEL)	Distance to noise contour (feet)		
				70 dBA CNEL	65 dBA CNEL	60 dBA CNEL
De Anza Blvd	Mariani to Lazaneo	45,020	77.3	153	330	711
De Anza Blvd	Lazaneo to Alves	43,120	77.1	149	321	691
De Anza Blvd	Alves to Stevens Creek	42,740	77.1	148	319	687
Stevens Creek Blvd	Mary to Stelling	32,800	74.5	100	216	465
Stevens Creek Blvd	Stelling to Saich	33,300	74.6	101	218	470
Stevens Creek Blvd	Saich to Bandley	30,180	74.2	95	204	440
Stevens Creek Blvd	Bandley to De Anza	32,020	74.4	99	212	458
Bandley	Stevens Creek to Alves	5,220	61.2	13	28	60

Background Conditions Project Off-Site Contributions

Roadway	Segment	CNEL at 50 feet (dBA)			
		No Project	With Project	Project Contribution	Potential Impact?
De Anza Blvd	Mariani to Lazaneo	77.3	77.3	0.0	no
De Anza Blvd	Lazaneo to Alves	77.1	77.1	0.0	no
De Anza Blvd	Alves to Stevens Creek	77.1	77.1	0.0	no
Stevens Creek Blvd	Mary to Stelling	74.4	74.5	0.1	no
Stevens Creek Blvd	Stelling to Saich	74.6	74.6	0.0	no
Stevens Creek Blvd	Saich to Bandley	74.6	74.2	-0.4	no
Stevens Creek Blvd	Bandley to De Anza	74.4	74.4	0.0	no
Bandley	Stevens Creek to Alves	61.2	61.2	0.0	no



Overall Project Off-Site Contributions

Roadway	Segment	CNEL at 50 feet (dBA)				
		Existing	2020 With Project	Overall Increase	Project Contribution	Potential Impact?
De Anza Blvd	Mariani to Lazaneo	76.9	77.3	0.4	0.3	no
De Anza Blvd	Lazaneo to Alves	76.9	77.1	0.2	0.1	no
De Anza Blvd	Alves to Stevens Creek	76.8	77.1	0.2	0.1	no
Stevens Creek Blvd	Mary to Stelling	74.3	74.5	0.3	0.1	no
Stevens Creek Blvd	Stelling to Saich	74.3	74.6	0.3	0.1	no
Stevens Creek Blvd	Saich to Bandley	73.9	74.2	0.3	0.1	no
Stevens Creek Blvd	Bandley to De Anza	74.2	74.4	0.2	0.0	no
Bandley	Stevens Creek to Alves	61.4	61.2	-0.2	-0.2	no

## Construction Generated Vibration

### Vibration Annoyance Criteria

Receptor:	Average Vibration Level - Adjacent Office Building	Average Distance (feet):	175
Equipment	Approximate Velocity Level at 25 ft, VdB	Approximate Velocity Level, VdB	
Vibratory Roller	94	77	
Caisson Drill	87	70	
Large bulldozer	87	70	
Small bulldozer	58	41	
Jackhammer	79	62	
Loaded trucks	86	69	
	<b>Criteria</b>	<b>78</b>	

Receptor:	Average Vibration Levels - Adjacent Banks	Average Distance (feet):	325
Equipment	Approximate Velocity Level at 25 ft, VdB	Approximate Velocity Level, VdB	
Vibratory Roller	94	72	
Caisson Drill	87	65	
Large bulldozer	87	65	
Small bulldozer	58	36	
Jackhammer	79	57	
Loaded trucks	86	64	
	<b>Criteria</b>	<b>78</b>	

Receptor:	Average Vibration Levels - Aloft Hotel	Average Distance (feet):	340
Equipment	Approximate Velocity Level at 25 ft, VdB	Approximate Velocity Level, VdB	
Vibratory Roller	94	71	
Caisson Drill	87	64	
Large bulldozer	87	64	
Small bulldozer	58	35	
Jackhammer	79	56	
Loaded trucks	86	63	
	<b>Criteria</b>	<b>78</b>	

Receptor:	Average Vibration Levels - Apartments Across Alves Dr	Average Distance (feet):	410
Equipment	Approximate Velocity Level at 25 ft, VdB	Approximate Velocity Level, VdB	
Vibratory Roller	94	70	
Caisson Drill	87	63	
Large bulldozer	87	63	
Small bulldozer	58	34	
Jackhammer	79	55	
Loaded trucks	86	62	
	<b>Criteria</b>	<b>78</b>	

### Structural Damage Criteria

Receptor:	Maximum Vibration Levels - Office next to Site	Closest Distance (feet):	25
Equipment	Approximate RMS a Velocity at 25 ft, inch/second	Approximate RMS Velocity Level, inch/second	
Vibratory Roller	0.210	0.210	
Caisson Drill	0.089	0.089	
Large bulldozer	0.089	0.089	
Small bulldozer	0.003	0.003	
Jackhammer	0.035	0.035	
Loaded trucks	0.076	0.076	
	<b>Criteria</b>	<b>0.200</b>	

Receptor:	Maximum Vibration Levels - Hotel Aloft	Closest Distance (feet):	75
Equipment	Approximate RMS a Velocity at 25 ft, inch/second	Approximate RMS Velocity Level, inch/second	
Vibratory Roller	0.210	0.040	
Caisson Drill	0.089	0.017	
Large bulldozer	0.089	0.017	
Small bulldozer	0.003	0.001	
Jackhammer	0.035	0.007	
Loaded trucks	0.076	0.015	
	<b>Criteria</b>	<b>0.200</b>	

Receptor:	Maximum Vibration Levels - Adjacent Banks	Closest Distance (feet):	130
Equipment	Approximate RMS a Velocity at 25 ft, inch/second	Approximate RMS Velocity Level, inch/second	
Vibratory Roller	0.210	0.018	
Caisson Drill	0.089	0.008	
Large bulldozer	0.089	0.008	
Small bulldozer	0.003	0.000	
Jackhammer	0.035	0.003	
Loaded trucks	0.076	0.006	
	<b>Criteria</b>	<b>0.200</b>	

Receptor:	Maximum Vibration Levels - Apartments Across Alves Dr	Closest Distance (feet):	160
Equipment	Approximate RMS a Velocity at 25 ft, inch/second	Approximate RMS Velocity Level, inch/second	
Vibratory Roller	0.210	0.013	
Caisson Drill	0.089	0.005	
Large bulldozer	0.089	0.005	
Small bulldozer	0.003	0.000	
Jackhammer	0.035	0.002	
Loaded trucks	0.076	0.005	
	<b>Criteria</b>	<b>0.200</b>	

<sup>1</sup> Determined based on use of jackhammers or pneumatic hammers that may be used for pavement demolition at a distance of 25 feet

Notes: RMS velocity calculated from vibration level (VdB) using the reference of one micron/inch/second.

Source: Based on methodology from the United States Department of Transportation Federal Transit Administration, *Transit Noise and Vibration Impact Assessment* (2006).

**Construction Generated Vibration**

**Vibration Annoyance Criteria**

Receptor:	Average Vibration Level - Office Building	Average Distance (feet):
		100
Equipment	Approximate Velocity Level at 25 ft, VdB	Approximate Velocity Level, VdB
Vibratory Roller	94	82
Caisson Drill	87	75
Large bulldozer	87	75
Small bulldozer	58	46
Jackhammer	79	67
Loaded trucks	86	74
	Criteria	78

**Structural Damage Criteria**

Receptor:	Maximum Vibration Levels - C1	Closest Distance (feet):
		25
Equipment	Approximate RMS a Velocity at 25 ft, inch/second	Approximate RMS Velocity Level, inch/second
Caisson Drill	0.089	0.089
Large bulldozer	0.089	0.08900
Small bulldozer	0.003	0.003000
Jackhammer	0.035	0.035
Loaded trucks	0.076	0.076
	Criteria	0.200

Receptor:	Maximum Vibration Levels - C2	Closest Distance (feet):
		130
Equipment	Approximate RMS a Velocity at 25 ft, inch/second	Approximate RMS Velocity Level, inch/second
Caisson Drill	0.089	0.008
Large bulldozer	0.089	0.008
Small bulldozer	0.003	0.000
Jackhammer	0.035	0.003
Loaded trucks	0.076	0.006
	Criteria	0.200

Receptor:	Maximum Vibration Levels - C3	Closest Distance (feet):
		160
Equipment	Approximate RMS a Velocity at 25 ft, inch/second	Approximate RMS Velocity Level, inch/second
Caisson Drill	0.089	0.005
Large bulldozer	0.089	0.005
Small bulldozer	0.003	0.000
Jackhammer	0.035	0.002
Loaded trucks	0.076	0.005
	Criteria	0.200

Receptor:	Maximum Vibration Levels - C4	Closest Distance (feet):
		210
Equipment	Approximate RMS a Velocity at 25 ft, inch/second	Approximate RMS Velocity Level, inch/second
Caisson Drill	0.089	0.004
Large bulldozer	0.089	0.004
Small bulldozer	0.003	0.0001
Jackhammer	0.035	0.001
Loaded trucks	0.076	0.003
	Criteria	0.200

<sup>1</sup> Determined based on use of jackhammers or pneumatic hammers that may be used for pavement demolition at a distance of 25 feet  
 Notes: RMS velocity calculated from vibration level (VdB) using the reference of one micron/second.  
 Source: Based on methodology from the United States Department of Transportation Federal Transit Administration, *Transit Noise and Vibration Impact Assessment* (2006).

<b>Construction Equipment</b>	<b>Range</b>	<b>At 50 Feet</b>
Pile Drivers, 12,000 to 18,000 ft-lb/blow	81 to 96	93
Rock Drills	83 to 99	96
Jack Hammers	75 to 85	82
Pneumatic Tools	78 to 88	85
Pumps	68 to 80	77
Dozers	85 to 90	88
Tractor	77 to 82	80
Front-End Loaders	86 to 90	88
Hydraulic Backhoe	81 to 90	86
Hydraulic Excavators	81 to 90	86
Graders	79 to 89	86
Air Compressors	76 to 86	86
Trucks	81 to 87	86

## Noise Levels During Construction

Reference Levels: Construction Noise at 50 Feet (dBA Leq) <sup>1</sup>				
Construction Phase	Distance: Receptor to center of activity	Average Level (dBA Leq) <sup>2</sup>	Distance: Receptor to border of site	Maximum Level (dBA Lmax) <sup>3</sup>
Demolition + Prep	50	89	50	90
Demolition + Grading		89		90
Demolition + Utilities		86		90
Paving				
Building Construction		86		84
Site Improvements		86		84
Construction Noise at 175 Feet-- Adjacent Office Buildings				
Construction Phase	Distance: Receptor to center of activity	Average Level (dBA Leq) <sup>2</sup>	Distance: Receptor to border of site	Maximum Level (dBA Lmax) <sup>3</sup>
Demolition	175	78	25	96
Grading		78		96
Utilities		76		96
Paving		-11		6
Building Construction		75		90
Building Construction W/Impact Pile Driving		75		90
Construction Noise at 325 Feet-- Adjacent Banks				
Construction Phase	Distance: Receptor to center of activity	Average Level (dBA Leq) <sup>2</sup>	Distance: Receptor to border of site	Maximum Level (dBA Lmax) <sup>3</sup>
Demolition	325	72	130	81
Grading		72		81
Utilities		70		81
Paving		-16		-8
Building Construction		70		76
Building Construction W/Impact Pile Driving		70		76
Construction Noise at 340 Feet-- Aloft Hotel				
Construction Phase	Distance: Receptor to center of activity	Average Level (dBA Leq) <sup>2</sup>	Distance: Receptor to border of site	Maximum Level (dBA Lmax) <sup>3</sup>
Demolition	340	72	75	86
Grading		72		86
Utilities		70		86
Paving		-17		-4
Building Construction		69		80
Building Construction W/Impact Pile Driving		69		80
Construction Noise at 410 Feet-- Apartments Across Alves Dr				
Construction Phase	Distance: Receptor to center of activity	Average Level (dBA Leq) <sup>2</sup>	Distance: Receptor to border of site	Maximum Level (dBA Lmax) <sup>3</sup>
Demolition	410	70	160	79
Grading		70		79
Utilities		68		79
Paving		-18		-10
Building Construction		68		74
Building Construction W/Impact Pile Driving		68		74

Drop Off  
hard=0;  
soft=0.5  
0

Construction Noise at				
Construction Phase	Distance: Receptor to center of activity	Average Level (dBA Leq) <sup>2</sup>	Distance: Receptor to border of site	Maximum Level (dBA Lmax) <sup>3</sup>
Demolition	1300	60	N/A	#VALUE!
Grading		60		#VALUE!
Utilities		58		#VALUE!
Paving		-28		#VALUE!
Building Construction		58		#VALUE!
Building Construction W/Impact Pile Driving		58		#VALUE!

Construction Noise at				
Construction Phase	Distance: Receptor to center of activity	Average Level (dBA Leq) <sup>2</sup>	Distance: Receptor to border of site	Maximum Level (dBA Lmax) <sup>3</sup>
Demolition	200	77	N/A	#VALUE!
Grading		76		#VALUE!
Utilities		74		#VALUE!
Paving		-12		#VALUE!
Building Construction		74		#VALUE!
Building Construction W/Impact Pile Driving		74		#VALUE!

<sup>1</sup> Calculations based on the Roadway Construction Noise Model with the construction information provided by the applicant.

<sup>2</sup> Average daily noise level including all equipment in use simultaneously considering utilization factors.

<sup>3</sup> Maximum instantaneous noise level from the loudest equipment used during the construction phase.